

**CX300C**  
Crawler Excavator

**SERVICE MANUAL**

Part number 47795405

English

October 2015

© 2015 CNH Industrial Italia S.p.A. All Rights Reserved.

**CASE**  
CONSTRUCTION



## **SERVICE MANUAL**

**CX300C Crawler excavators LC version (TIER 4) - APAC Region - ANZ Market**

# Contents

---

## INTRODUCTION

|   |       |
|---|-------|
| Engine.....   | 10    |
| [10.001] Engine and crankcase .....                                 | 10.1  |
| [10.102] Pan and covers .....                                       | 10.2  |
| [10.106] Valve drive and gears .....                                | 10.3  |
| [10.101] Cylinder heads .....                                       | 10.4  |
| [10.105] Connecting rods and pistons.....                           | 10.5  |
| [10.103] Crankshaft and flywheel.....                               | 10.6  |
| [10.216] Fuel tanks .....   | 10.7  |
| [10.206] Fuel filters .....   | 10.8  |
| [10.218] Fuel injection system.....                                 | 10.9  |
| [10.250] Turbocharger and lines.....                                | 10.10 |
| [10.254] Intake and exhaust manifolds and muffler .....             | 10.11 |
| [10.500] Selective Catalytic Reduction (SCR) exhaust treatment..... | 10.12 |
| [10.501] Exhaust Gas Recirculation (EGR) exhaust treatment.....     | 10.13 |
| [10.400] Engine cooling system .....                                | 10.14 |
| [10.414] Fan and drive .....  | 10.15 |
| [10.310] Aftercooler.....   | 10.16 |
| [10.304] Engine lubrication system.....                             | 10.17 |
| [10.408] Oil cooler and lines.....                                  | 10.18 |
| Hydraulic systems.....  | 35    |
| [35.000] Hydraulic systems.....                                     | 35.1  |
| [35.300] Reservoir, cooler, and filters.....                        | 35.2  |
| [35.106] Variable displacement pump .....                           | 35.3  |
| [35.102] Pump control valves.....                                   | 35.4  |
| [35.304] Combination pump units .....                               | 35.5  |
| [35.359] Main control valve.....                                    | 35.6  |

|   |           |
|---|-----------|
| [35.357] Pilot system .....                                 | 35.7      |
| [35.355] Hydraulic hand control .....                       | 35.8      |
| [35.356] Hydraulic foot control.....                        | 35.9      |
| [35.352] Hydraulic swing system .....                       | 35.10     |
| [35.353] Hydraulic travel system .....                      | 35.11     |
| [35.354] Hydraulic central joint .....                      | 35.12     |
| [35.736] Boom hydraulic system .....                        | 35.13     |
| [35.737] Dipper hydraulic system.....                       | 35.14     |
| [35.738] Excavator and backhoe bucket hydraulic system..... | 35.15     |
| [35.734] Tool quick coupler hydraulic system .....          | 35.16     |
| <b>Frames and ballasting .....</b>                          | <b>39</b> |
| [39.140] Ballasts and supports .....                        | 39.1      |
| <b>Tracks and track suspension.....</b>                     | <b>48</b> |
| [48.130] Track frame and driving wheels .....               | 48.1      |
| [48.100] Tracks .....                                       | 48.2      |
| [48.134] Track tension units .....                          | 48.3      |
| [48.138] Track rollers .....                                | 48.4      |
| <b>Cab climate control .....</b>                            | <b>50</b> |
| [50.100] Heating .....                                      | 50.1      |
| [50.200] Air conditioning.....                              | 50.2      |
| <b>Electrical systems .....</b>                             | <b>55</b> |
| [55.000] Electrical system .....                            | 55.1      |
| [55.100] Harnesses and connectors.....                      | 55.2      |
| [55.525] Cab engine controls.....                           | 55.3      |
| [55.015] Engine control system.....                         | 55.4      |
| [55.201] Engine starting system .....                       | 55.5      |
| [55.301] Alternator.....                                    | 55.6      |
| [55.302] Battery.....                                       | 55.7      |

|  |           |
|--|-----------|
| [55.202] Cold start aid .....  | 55.8      |
| [55.010] Fuel injection system .....   | 55.9      |
| [55.014] Engine intake and exhaust system.....                                 | 55.10     |
| [55.989] Exhaust Gas Recirculation (EGR) electrical system .....               | 55.11     |
| [55.012] Engine cooling system .....   | 55.12     |
| [55.013] Engine oil system .....   | 55.13     |
| [55.640] Electronic modules .....  | 55.14     |
| [55.512] Cab controls.....   | 55.15     |
| [55.036] Hydraulic system control .....  | 55.16     |
| [55.051] Cab Heating, Ventilation, and Air-Conditioning (HVAC) controls.....   | 55.17     |
| [55.050] Heating, Ventilation, and Air-Conditioning (HVAC) control system..... | 55.18     |
| [55.524] Cab controls (Lift arm, Boom, Dipper, Bucket).....                    | 55.19     |
| [55.416] Swing control system .....  | 55.20     |
| [55.417] Travel control system .....   | 55.21     |
| [55.950] Hammer electric system .....  | 55.22     |
| [55.530] Camera.....   | 55.23     |
| [55.518] Wiper and washer system.....  | 55.24     |
| [55.404] External lighting .....   | 55.25     |
| [55.514] Cab lighting .....  | 55.26     |
| [55.408] Warning indicators, alarms, and instruments .....                     | 55.27     |
| [55.992] Anti-theft system .....   | 55.28     |
| [55.DTC] FAULT CODES.....  | 55.29     |
| <b>Booms, dippers, and buckets .....</b>                                       | <b>84</b> |
| [84.910] Boom .....  | 84.1      |
| [84.912] Dipper arm .....  | 84.2      |
| [84.100] Bucket.....   | 84.3      |
| <b>Platform, cab, bodywork, and decals .....</b>                               | <b>90</b> |
| [90.150] Cab.....  | 90.1      |

|   |      |
|---|------|
| [90.156] Cab glazing .....                        | 90.2 |
| [90.120] Mechanically-adjusted operator seat..... | 90.3 |
| [90.100] Engine hood and panels .....             | 90.4 |





## **INTRODUCTION**



# Contents

---

## INTRODUCTION

|   |    |
|---|----|
| Foreword - Important notice regarding equipment servicing ..... | 3  |
| Safety rules .....  | 4  |
| Safety rules – General information .....                        | 5  |
| Safety rules – Personal safety .....                            | 6  |
| Safety rules – ROPS judgment .....                              | 8  |
| Torque – Bolt and nut .....                                     | 16 |
| Basic instructions - Shop and assembly .....                    | 17 |
| Weight .....  | 19 |
| Dimension .....   | 22 |
| Conversion factors .....  | 25 |
| Consumables .....   | 37 |
| Capacities .....  | 40 |
| Abbreviation .....  | 41 |
| Product identification .....                                    | 44 |
| Product identification - Machine orientation .....              | 47 |

---

## **Foreword - Important notice regarding equipment servicing**

All repair and maintenance work listed in this manual must be carried out only by qualified dealership personnel, strictly complying with the instructions given, and using, whenever possible, the special tools.

Anyone who performs repair and maintenance operations without complying with the procedures provided herein shall be responsible for any subsequent damages.

The manufacturer and all the organizations of its distribution chain, including - without limitation - national, regional, or local dealers, reject any responsibility for damages caused by parts and/or components not approved by the manufacturer, including those used for the servicing or repair of the product manufactured or marketed by the manufacturer. In any case, no warranty is given or attributed on the product manufactured or marketed by the manufacturer in case of damages caused by parts and/or components not approved by the manufacturer.

The manufacturer reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions, and illustrative material herein are as accurate as known at time of publication but are subject to change without notice.

In case of questions, refer to your CASE CONSTRUCTION Sales and Service Networks.

## Safety rules


### Personal safety





This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible death or injury.

Throughout this manual you will find the signal words DANGER, WARNING, and CAUTION followed by special instructions. These precautions are intended for the personal safety of you and those working with you.

Read and understand all the safety messages in this manual before you operate or service the machine.

 DANGER indicates a hazardous situation that, if not avoided, will result in death or serious injury.

 WARNING indicates a hazardous situation that, if not avoided, could result in death or serious injury.

 CAUTION indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

**FAILURE TO FOLLOW DANGER, WARNING, AND CAUTION MESSAGES COULD RESULT IN DEATH OR SERIOUS INJURY.**

### Machine safety

**NOTICE:** Notice indicates a situation that, if not avoided, could result in machine or property damage.

Throughout this manual you will find the signal word Notice followed by special instructions to prevent machine or property damage. The word Notice is used to address practices not related to personal safety.

### Information

**NOTE:** Note indicates additional information that clarifies steps, procedures, or other information in this manual.

Throughout this manual you will find the word Note followed by additional information about a step, procedure, or other information in the manual. The word Note is not intended to address personal safety or property damage.

## **Safety rules – General information**

### **Cleaning**

Clean the metal parts with cleaning solution that meets the standard and steam cleaning. (except for bearings)

After cleaning, dry well, and inject oil in all parts.

Also inject oil into the bearings after drying.

### **Inspection**

When disassembling parts, check all the parts.

If there are any worn or damaged parts, replace them.

Inspect carefully to prevent initial breakdowns.

### **Bearing**

Replace any loose bearings.

Air dry bearings before installing them.

### **Needle bearing**

When inserting needle bearings, be very careful not to damage them.

Apply grease to the section where the needle bearing will be inserted.

### **Gear**

Check that there is no wear and no damage.

### **Oil seal, O-ring, gasket**

Always install new oil seals, O-rings, and gaskets.

Apply grease to sections where oil seals and O-rings will be inserted.

### **Shaft**

Check that there is no wear and no damage.

Check the bearings and check for damaged oil seals on the shaft.

### **Service parts**

Install CASE CONSTRUCTION genuine service parts.

When placing an order, check the parts catalog. It contains the CASE CONSTRUCTION genuine part numbers.

Any breakdowns arising from the installation of non-genuine parts are not covered by the warranty.

### **Lubricants (fuel, hydraulic oil)**

Use the oil from the specified company or specified in the operator's manual or service Manual.

Any breakdowns arising from any fuel or hydraulic oil other than those specified are not covered by the warranty.

## Safety rules – Personal safety

 **WARNING:**

This symbol indicates a precaution.  
It gives information concerning the safety of the operator and those in the surroundings.  
Read and understand these precautions thoroughly before performing the work.

Always comply with warnings and precautions so as to avoid any accidents.

This section covers information related to overall safety.

Check whether all warning labels are in place.

Additional labels can be ordered from Service Parts.

 **WARNING:**

Read the operator's manual to gain a thorough understanding of machine control operations.

 **WARNING:**

Perform any machine operations from the seating position.  
Any other method may cause severe injuries.

 **WARNING:**

Only the one operator is to ride on the machine. No one else is to ride on it.

 **WARNING:**

Check the safety messages in the operator's manual before starting the engine.  
Check all the warning labels on the machine.  
Check that no one is within the machine's operating range.  
Check the operating methods in a safe location before starting the actual work.  
Understand the machine operations well, then operate in compliance with all service-related laws and regulations.  
The operator's manual can be purchased at your CASE CONSTRUCTION dealer.

 **WARNING:**

Working with sloppy clothes or clothes with which safety cannot be ensured leads to damage to the machine and injury to the operator.  
Always wear clothes that ensures safety.  
In order to work more safely, it is recommended to wear additional safety equipment.  
Helmet, safety shoes, ear protection, goggles, work clothes, and gloves

 **WARNING:**

Pay careful attention when working with the engine running.

 **WARNING:**

Check hydraulic equipment.  
Work according to the procedure.  
Do not change the procedure.

## INTRODUCTION

 WARNING:

Check that there is no one in the surroundings before draining the pressure from hydraulic circuits during machine hydraulic cylinder inspection.

 WARNING:

Use gloves when handling high-temperature parts.

 WARNING:

Bring the lower parts or attachments in contact with the ground before inspecting or repairing them.

 WARNING:

Check that hoses and tubes are securely connected.  
If there is any damage to a hose or tube, replace it.  
Do not check for oil leaks by hand. Use cardboard or wood.

 WARNING:

When removing an attachment pin or other hardened pin, use a hammer that has a soft head.

 WARNING:

Wear eye protection when using a hammer to install a pin or when working with a grinder.  
At this time, use goggles or eye protectors that meet standards.

 WARNING:

Park the machine in a safe location when repairing or inspecting it.

 WARNING:

Use work site protection when repairing the machine.  
Check the oil, coolant, grease, and tools.  
Recover materials and parts as necessary.  
Pay enough attention to safety.

 WARNING:

Some of the machine's parts are extremely heavy.  
Use an appropriate lifting equipment for such parts.  
For weights and procedures, see the Service Manual.

 WARNING:

Exhaust gases are toxic.  
Always provide good ventilation when working indoors or in any other enclosed space.

 WARNING:

If the electrolytic battery solution freezes, it may explode.

## Safety rules – ROPS judgment

### 1. Purpose

Check against the ROPS judgment criteria to judge whether the machine satisfies the ROPS criteria or not.

The weight and boom of the machine greatly effects whether the ROPS judgment criteria is satisfied or not.

The ROPS test assumes that the weight being used is the weight of the machine when the maximum number of selectable options are mounted (as of 2009).

However, depending on the derivative machinery or the order details, the weight and boom position may differ from the assumed weight or position.

### 2. Criteria for judging whether a machine satisfies the ROPS criteria

#### Weight

The weight must not be over the weight shown below for each class.

If the weight is exceeded, there is a danger that the cab could be damaged and the operator could die or sustain a serious injury when the machine falls over.

If the weight exceeds the stipulated weight, the machine will not satisfy the ROPS criteria.

- Weight (X3 model)

To satisfy the ROPS criteria, the weight must not be over the indicated weight. (The below weights are the weights indicated on the plate within the ROPS cab.)

| Machine body total weight           | Class     |
|-------------------------------------|-----------|
| <b>16000 kg (35273.96 lb) max.</b>  | CX75C     |
|                                     | CX80C     |
|                                     | CX145C    |
| <b>20500 kg (45194.76 lb) max.</b>  | CX130C    |
|                                     | CX160C    |
| <b>28000 kg (61729.43 lb) max.</b>  | CX235C    |
| <b>31000 kg (68343.30 lb) max.</b>  | CX210C    |
|                                     | CX250C    |
|                                     | CX250C LR |
|                                     | CX300C    |
| <b>50000 kg (110231.13 lb) max.</b> | CX470C    |

\* The ROPS test assumes that the CX470C has a cage guard (alone).

- Weight (X2 model)


To satisfy the ROPS criteria, the weight must not be over the indicated weight. (The below weights are the weights indicated on the plate within the ROPS cab.)

| Machine body total weight          | Class  |
|------------------------------------|--------|
| <b>26600 kg (58642.96 lb) max.</b> | CX130B |
|                                    | CX160B |
|                                    | CX180B |
|                                    | CX210B |
|                                    | CX240B |

## Boom position

**⚠ WARNING:**

- If the machine has been modified so that the boom position has been lowered, the machine will not satisfy the ROPS criteria.
- It is necessary to consult with us if it is possible that the boom's position has been lowered by modification.
- The extent to which a boom position has moved cannot be determined in the same way for all machines.

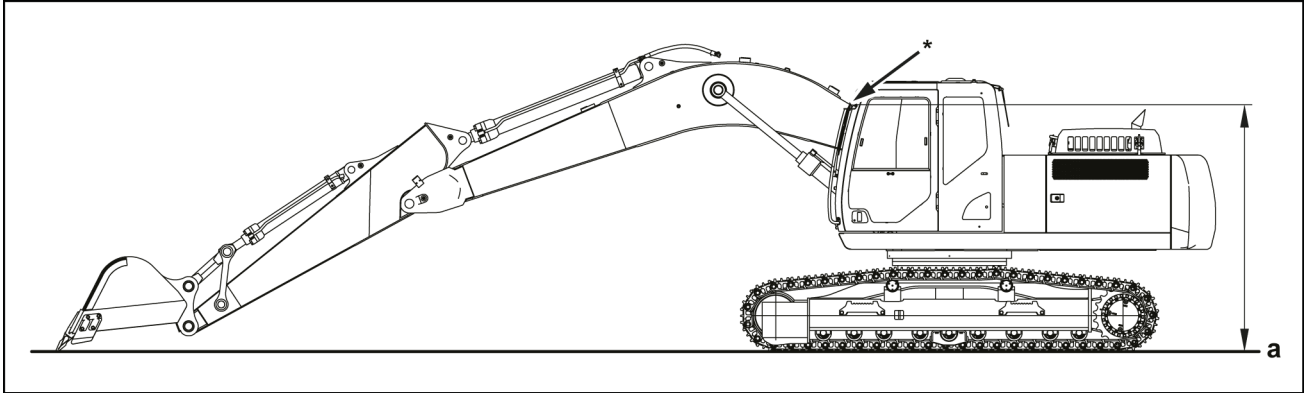

SML14CEX2001EA 1

**(a) Ground point**

With the tip of the bucket in contact with the ground surface at maximum work radius, if the position (\* in the diagram) that overlaps with the cab when viewed from the side is markedly lower than that of a standard machine (standard arm), the machine will not satisfy the ROPS criteria.

Also, with a machine body with a cab mounted that can withstand up to **31 ton**, the effect of mounting a **24 ton** machine, which is near the restriction weight, and a **21 ton** machine to the same cab will not be the same.


### 3. Prohibited items

- Modifications that reduce the strength of a platform that has a cab with a ROPS mounted to it. (Actions or modifications that reduce the functionality of the anchoring part at the left-rear of the cab)
- Modifications that effect the strength of the ROPS of a cab.

|   |   |
|---|---|
| Modification prohibited (Red part)                  | All modifications (grinding, welding, drilling holes, removing, etc.) are prohibited.   |
| Modification permitted under conditions (Gray part) | Removal of parts is prohibited.<br>Bar welding and making holes (up to diameter <b>20 mm (0.787 in)</b> ) by drilling are possible. |




[X3 cab (CX75C/CX80C/CX145C)]

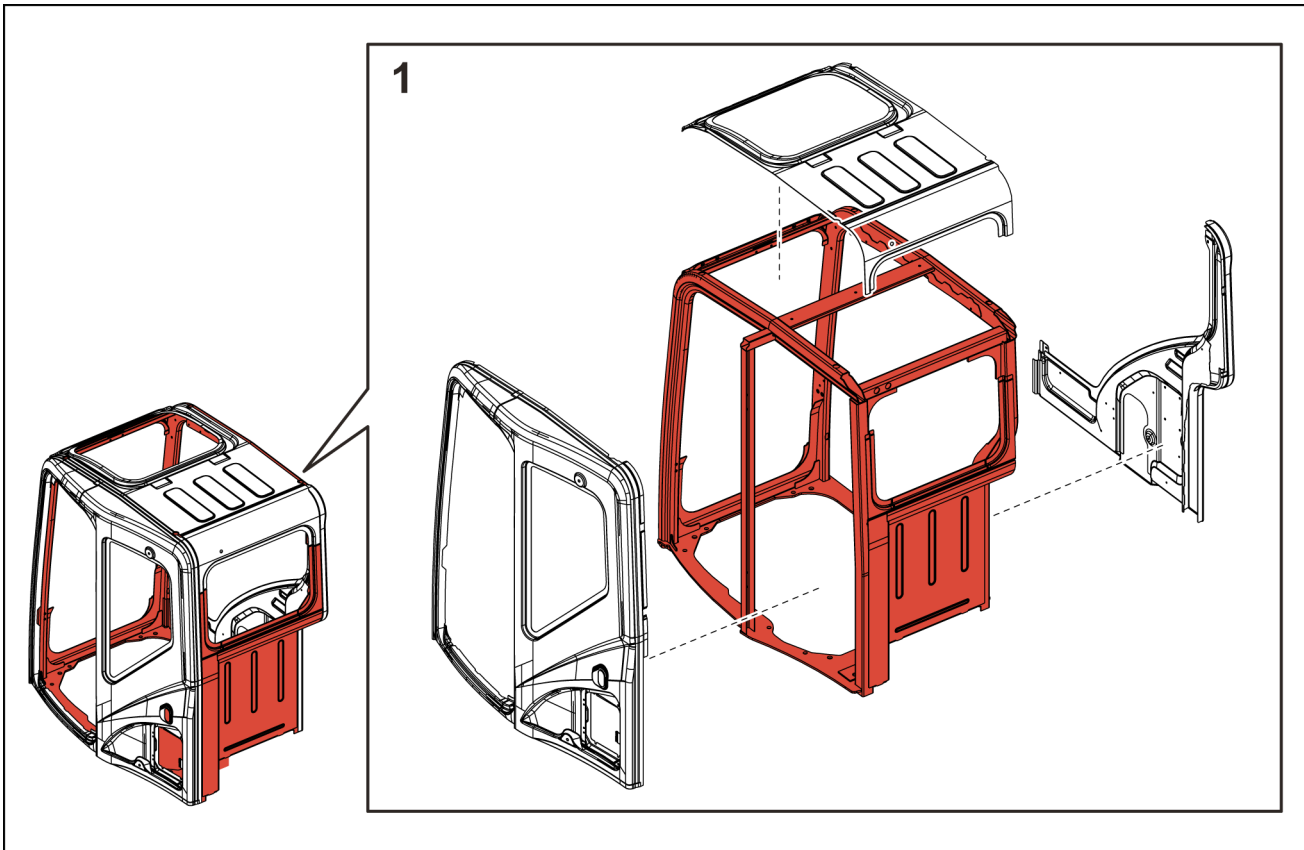

SMIL15CEX3363FA 2


**[X3 cab (CX235C)]**

The cab for the MSR model (CX235C) is the cab of the MSR model on the diagram (CX75C/ CX80C/CX145C) with reinforcement materials added in 3 locations.

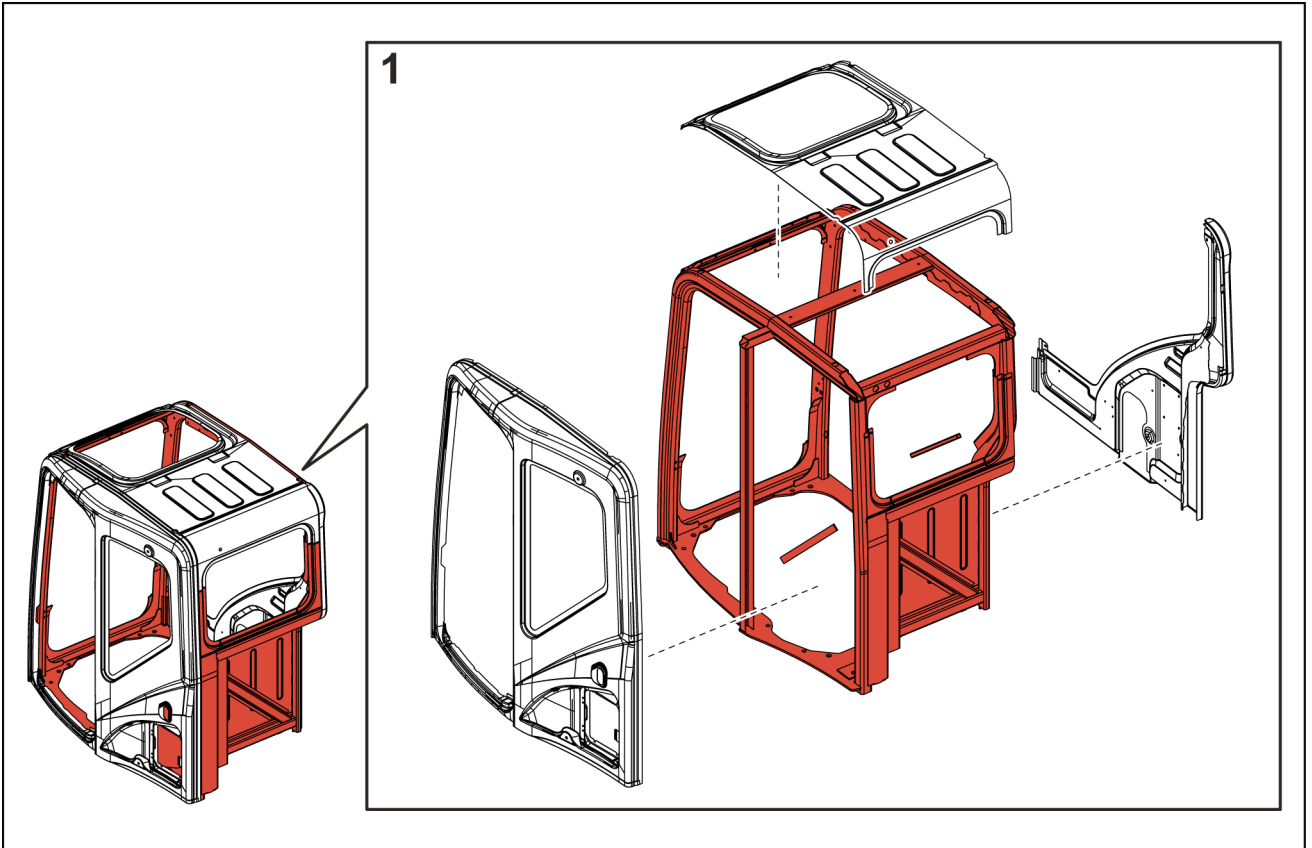


SMIL15CEX3364FA 3

[X3 cab (CX130C/CX160C)]

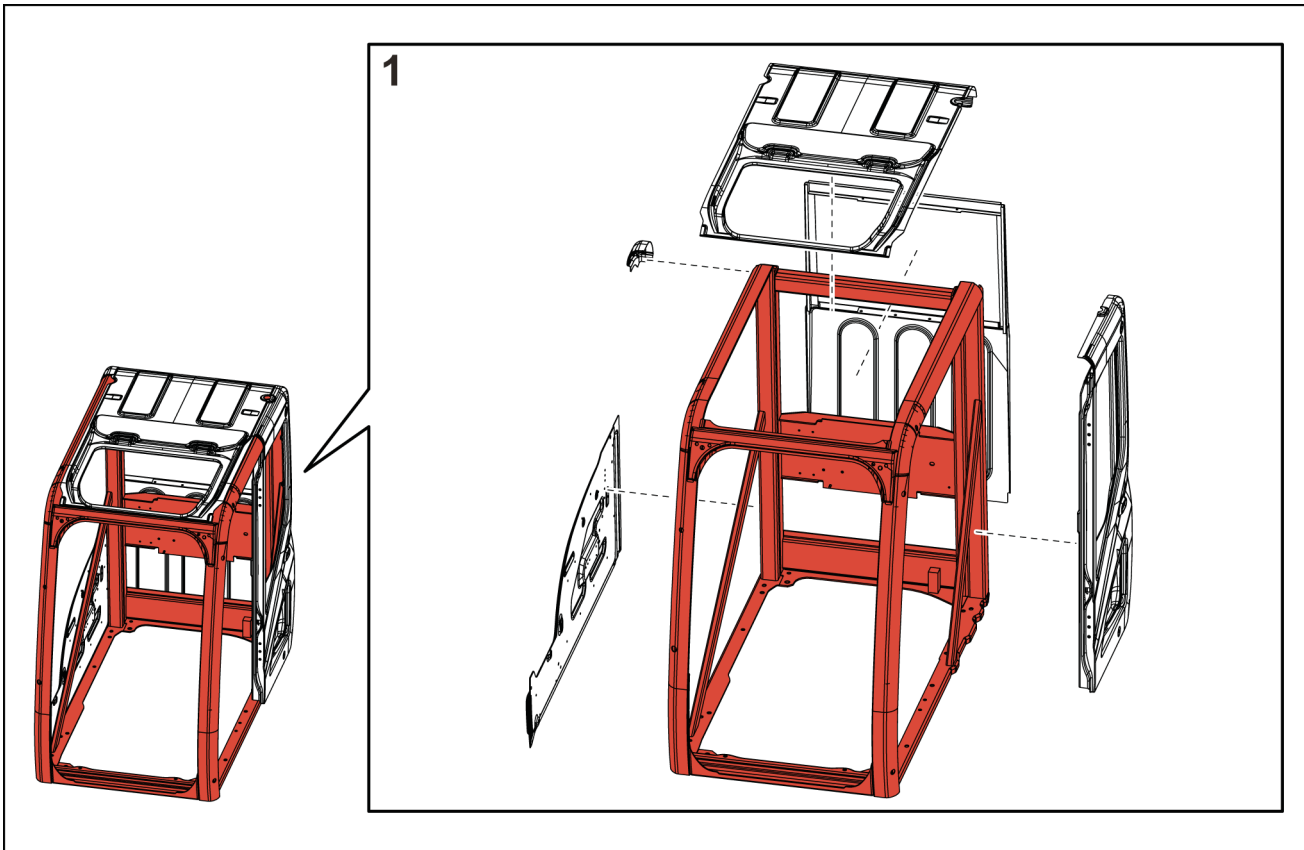

SMIL15CEX3365FA 4


[X3 cab (CX210C/CX240C/CX290C)]

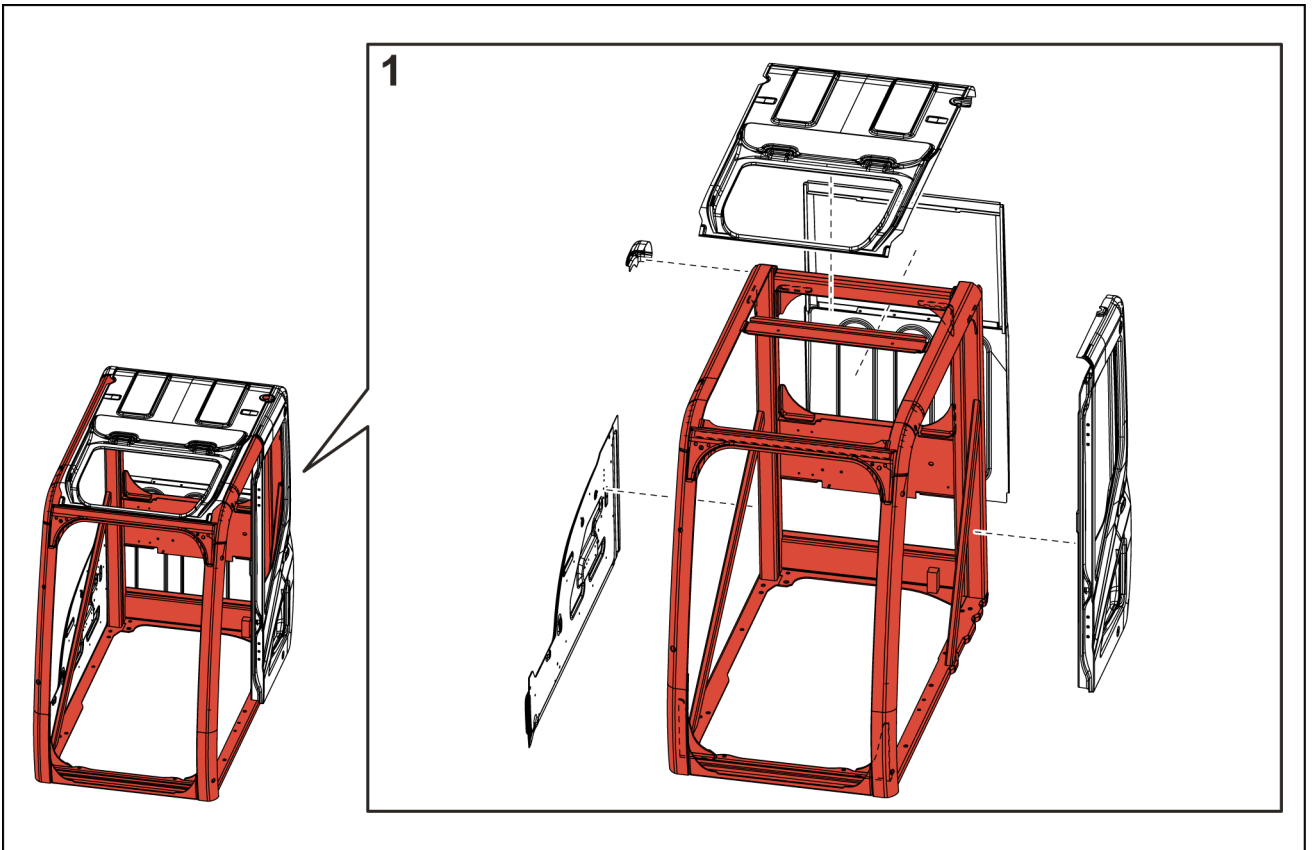

SMIL15CEX3366FA 5


**[X3 cab (CX350C)]**

The cab for the large-sized model (CX350C) is the cab of the medium-sized model on the diagram (CX210C - CX290C) with reinforcement materials added in 7 locations.

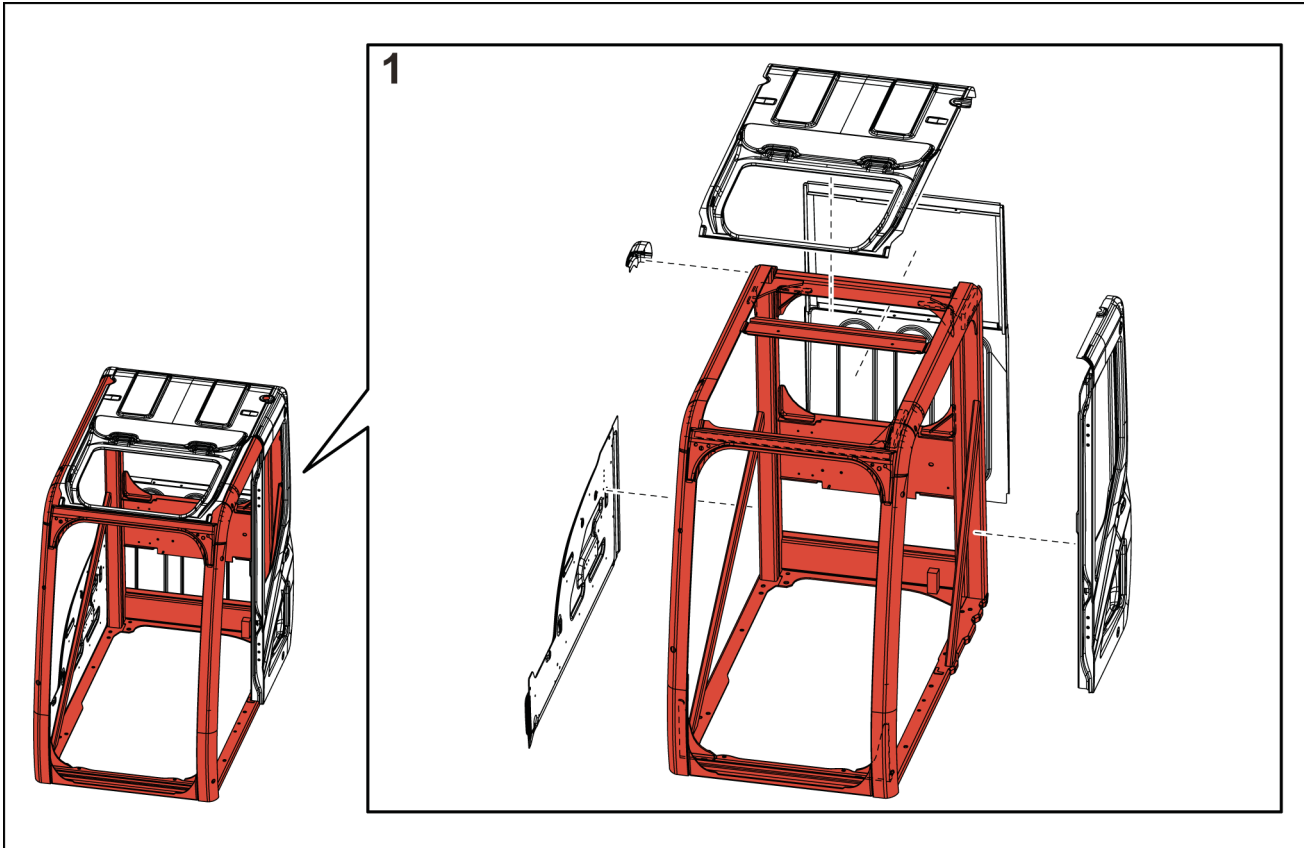

SMIL15CEX3367FA 6

**[X2 cab (CX130B/CX160B/CX210B/CX240B)]**

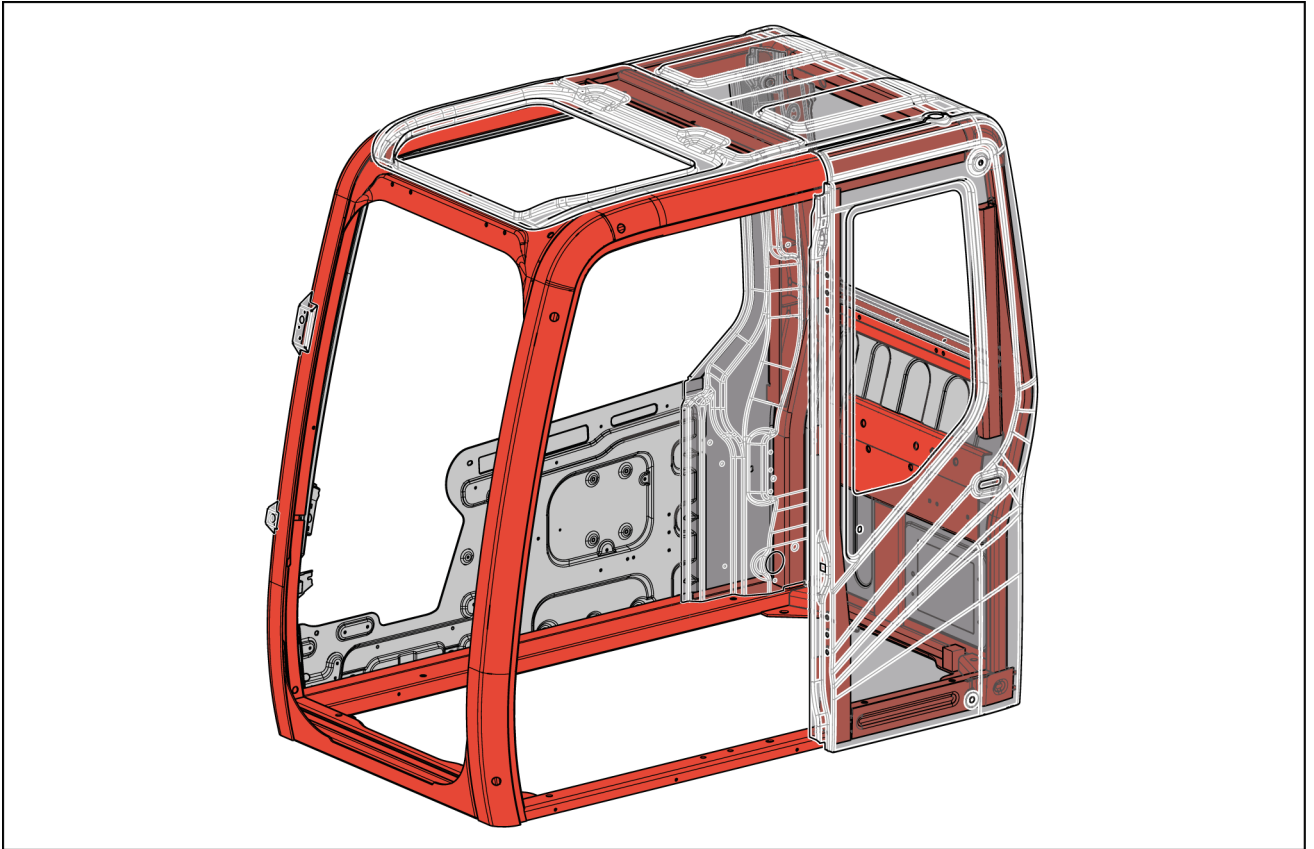


SMIL15CEX3368FA 7

- In general, high cabs do not satisfy the ROPS criteria. (It is necessary to consult with us to check if the high cab model satisfies the ROPS criteria.)

## Torque – Bolt and nut

- Tighten alternating between left and right and top and bottom so that uniform tightening force is applied.

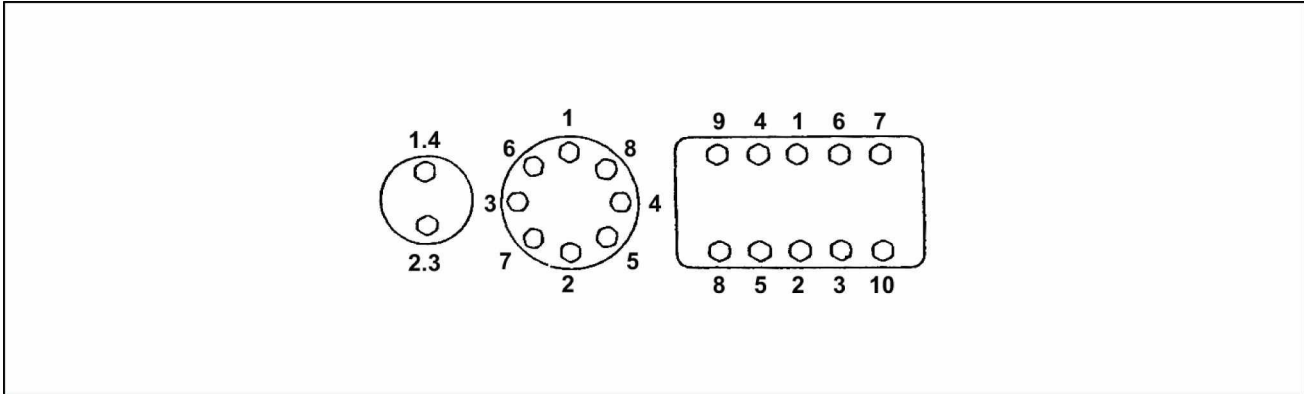

LPIL12CX00005EA 1

- If **LOCTITE®** was used on a removed bolt (there is something white sticking to the bolt when it is removed), clean the old **LOCTITE®** off with cleaning fluid, dry the bolt, then apply 2 - 3 drops of **LOCTITE®** to the thread section of the bolt.

### Torque table

| Bolt nominal diameter (size) |                   | M6                       | M8                         | M10                        | M12                        | M14                         | M16                                     | M18                                     | M20                                     |
|------------------------------|-------------------|--------------------------|----------------------------|----------------------------|----------------------------|-----------------------------|---|---|---|
| Hexagon bolt                 | Wrench            | 10 mm                    | 13 mm                      | 17 mm                      | 19 mm                      | 22 mm                       | 24 mm                                   | 27 mm                                   | 30 mm                                   |
|                              | Tightening torque | 6.9 N·m<br>(5.089 lb ft) | 19.6 N·m<br>(14.456 lb ft) | 39.2 N·m<br>(28.912 lb ft) | 58.8 N·m<br>(43.369 lb ft) | 98.1 N·m<br>(72.355 lb ft)  | 156.9 N·m<br>(115.72 m (115.72 3 lb ft) | 196.1 N·m<br>(144.63 m (144.63 6 lb ft) | 294.2 N·m<br>(216.99 m (216.99 1 lb ft) |
| Hexagon socket head bolt     | Wrench            | 5 mm                     | 6 mm                       | 8 mm                       | 10 mm                      | 12 mm                       | 14 mm                                   | 14 mm                                   | 17 mm                                   |
|                              | Tightening torque | 8.8 N·m<br>(6.491 lb ft) | 21.6 N·m<br>(15.931 lb ft) | 42.1 N·m<br>(31.051 lb ft) | 78.5 N·m<br>(57.899 lb ft) | 117.7 N·m<br>(86.811 lb ft) | 176.5 N·m<br>(130.18 m (130.18 0 lb ft) | 245.2 N·m<br>(180.85 m (180.85 0 lb ft) | 343.2 N·m<br>(253.13 m (253.13 1 lb ft) |

---

## Basic instructions - Shop and assembly

### Shimming

For each adjustment operation, select adjusting shims and measure the adjusting shims individually using a micrometer, then add up the recorded values. Do not rely on measuring the entire shimming set, which may be incorrect, or the rated value shown on each shim.

### Rotating shaft seals

For correct rotating shaft seal installation, proceed as follows:

1. Before assembly, allow the seal to soak in the oil it will be sealing for at least thirty minutes.
2. Thoroughly clean the shaft and check that the working surface on the shaft is not damaged.
3. Position the sealing lip facing the fluid.

**NOTE:** *With hydrodynamic lips, take into consideration the shaft rotation direction and position the grooves so that they will move the fluid towards the inner side of the seal.*

4. Coat the sealing lip with a thin layer of lubricant (use oil rather than grease). Fill the gap between the sealing lip and the dust lip on double lip seals with grease.
5. Insert the seal in its seat and press down using a flat punch or seal installation tool. Do not tap the seal with a hammer or mallet.
6. While you insert the seal, check that the seal is perpendicular to the seat. When the seal settles, make sure that the seal makes contact with the thrust element, if required.
7. To prevent damage to the seal lip on the shaft, position a protective guard during installation operations.

### O-ring seals

Lubricate the O-ring seals before you insert them in the seats. This will prevent the O-ring seals from overturning and twisting, which would jeopardize sealing efficiency.

### Sealing compounds

Apply a sealing compound on the mating surfaces when specified by the procedure. Before you apply the sealing compound, prepare the surfaces as directed by the product container.

### Spare parts

Only use CNH Original Parts or CASE CONSTRUCTION Original Parts.

Only genuine spare parts guarantee the same quality, duration, and safety as original parts, as they are the same parts that are assembled during standard production. Only CNH Original Parts or CASE CONSTRUCTION Original Parts can offer this guarantee.

When ordering spare parts, always provide the following information:

- Machine model (commercial name) and Product Identification Number (PIN)
- Part number of the ordered part, which can be found in the parts catalog



---

## Protecting the electronic and/or electrical systems during charging and welding

To avoid damage to the electronic and/or electrical systems, always observe the following practices:

1. Never make or break any of the charging circuit connections when the engine is running, including the battery connections.
2. Never short any of the charging components to ground.
3. Always disconnect the ground cable from the battery before arc welding on the machine or on any machine attachment.
  - Position the welder ground clamp as close to the welding area as possible.
  - If you weld in close proximity to a computer module, then you should remove the module from the machine.
  - Never allow welding cables to lie on, near, or across any electrical wiring or electronic component while you weld.
4. Always disconnect the negative cable from the battery when charging the battery in the machine with a battery charger.

**NOTICE:** *If you must weld on the unit, you must disconnect the battery ground cable from the machine battery. The electronic monitoring system and charging system will be damaged if this is not done.*

5. Remove the battery ground cable. Reconnect the cable when you complete welding.

### **⚠ WARNING**

**Battery acid causes burns. Batteries contain sulfuric acid.**

**Avoid contact with skin, eyes or clothing. Antidote (external): Flush with water. Antidote (eyes): flush with water for 15 minutes and seek medical attention immediately. Antidote (internal): Drink large quantities of water or milk. Do not induce vomiting. Seek medical attention immediately. Failure to comply could result in death or serious injury.**

W0111A

## Special tools


The special tools that CASE CONSTRUCTION suggests and illustrate in this manual have been specifically researched and designed for use with CASE CONSTRUCTION machines. The special tools are essential for reliable repair operations. The special tools are accurately built and rigorously tested to offer efficient and long-lasting operation.

By using these tools, repair personnel will benefit from:

- Operating in optimal technical conditions
- Obtaining the best results
- Saving time and effort
- Working in safe conditions

# Weight

## Divided weight (standard type)

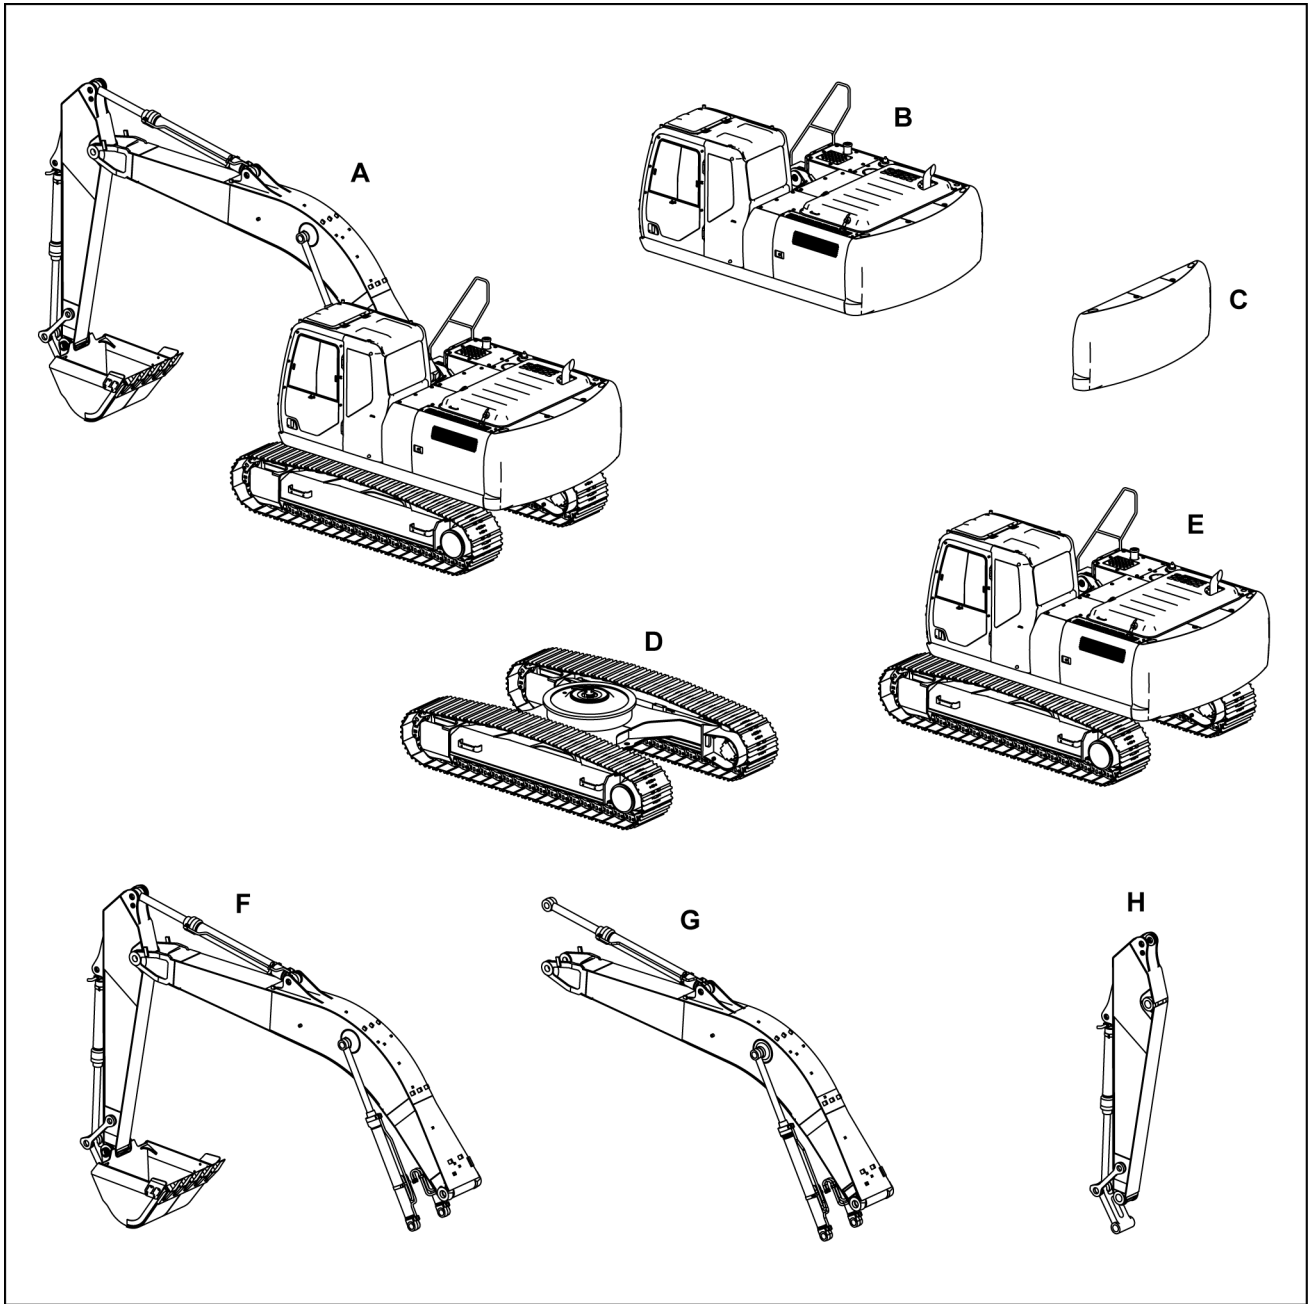

SMIL15CEX5556GA 1

| Code | Part name   | Weight                  |
|------|---|-------------------------|
| A    | Operating weight  | 29900 kg (65918.561 lb) |
| B    | Upper component (including counterweight and turntable bearing) | 13000 kg (28660.244 lb) |
| C    | Counterweight   | 5320 kg (11728.654 lb)  |
| D    | Lower component (with grouser shoe)                             | 11100 kg (24471.439 lb) |
| E    | Main unit weight  | 24200 kg (53352.146 lb) |
| F    | Attachments   | 5710 kg (12588.461 lb)  |
| G    | Boom (including cylinder)                                       | 4210 kg (9281.510 lb)   |
| H    | Arm (including cylinder and linkage)                            | 1540 kg (3395.137 lb)   |

**NOTE:** The weights shown here are approximate values.

**Stand alone part weight**

|    | <b>Part name</b>  | <b>Weight</b>                |
|----|-------------------|------------------------------|
| 1  | Travel unit       | <b>463 kg (1020.746 lb)</b>  |
| 2  | Take-up roller    | <b>165 kg (363.765 lb)</b>   |
| 3  | Upper roller      | <b>43 kg (94.799 lb)</b>     |
| 4  | Lower roller      | <b>55 kg (121.255 lb)</b>    |
| 5  | Swing unit        | <b>428 kg (943.583 lb)</b>   |
| 6  | Turntable bearing | <b>498 kg (1097.908 lb)</b>  |
| 7  | Engine            | <b>640 kg (1410.966 lb)</b>  |
| 8  | Radiator          | <b>150 kg (330.695 lb)</b>   |
| 9  | Hydraulic pump    | <b>156 kg (343.923 lb)</b>   |
| 10 | Fuel tank         | <b>169 kg (372.583 lb)</b>   |
| 11 | Hydraulic tank    | <b>156 kg (343.923 lb)</b>   |
| 12 | Control valve     | <b>211 kg (465.178 lb)</b>   |
| 13 | Center joint      | <b>58 kg (127.869 lb)</b>    |
| 14 | Boom              | <b>1952 kg (4303.446 lb)</b> |

**Shoe weight (per side)**

|   | <b>Part name</b>                       | <b>Weight</b>                |
|---|--|------------------------------|
| 1 | <b>600 mm (23.622 in)</b> grouser shoe | <b>1850 kg (4078.573 lb)</b> |
| 2 | <b>700 mm (27.56 in)</b> grouser shoe  | <b>2020 kg (4453.361 lb)</b> |
| 3 | <b>800 mm (31.50 in)</b> grouser shoe  | <b>2185 kg (4817.126 lb)</b> |


**Arm weight**

|   | <b>Part name</b> | <b>Weight</b>                 |
|---|------------------|-------------------------------|
| 1 | Standard arm     | <b>859.1 kg (1894.001 lb)</b> |
| 2 | Short arm        | <b>755.5 kg (1665.601 lb)</b> |
| 3 | Long arm         | <b>988.6 kg (2179.501 lb)</b> |

**Bucket weight**


|   | Bucket capacity    | Weight                 | L1                  | L2                  |
|---|--------------------|------------------------|---------------------|---------------------|
| 1 | 1.0 m <sup>3</sup> | 837.1 kg (1845.720 lb) | 1175 mm (46.260 in) | 1276 mm (50.236 in) |
| 2 | 1.1 m <sup>3</sup> | 868 kg (1913.622 lb)   | 1260 mm (49.606 in) | 1360 mm (53.543 in) |
| 3 | 1.3 m <sup>3</sup> | 940.8 kg (2074.120 lb) | 1460 mm (57.480 in) | 1560 mm (61.417 in) |

Bucket shape

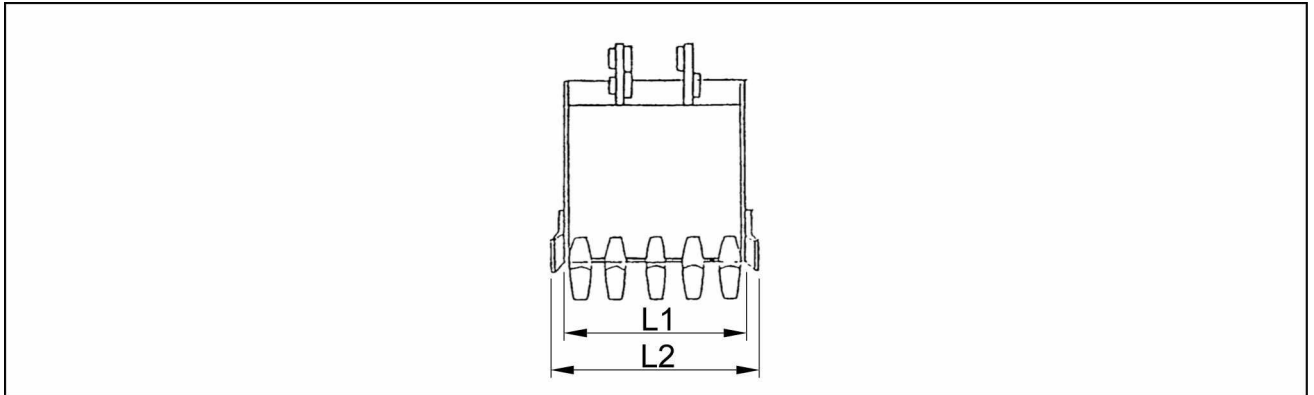

SMIL15CEX3386EA 2

Hoe bucket

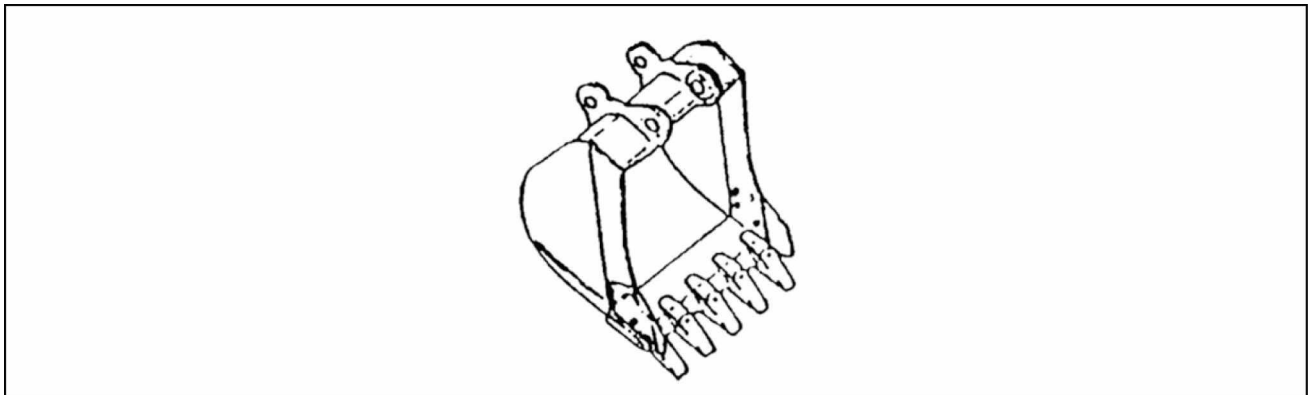


SMIL15CEX3387EA 3

## Dimension

### Standard arm [ 3.18 m (10.4331 ft)]


- NOTE:** 1. Numbers are subject to change without notice due to design change or other reason.  
 2. The diagrams give values that include the shoe lug height (a) [ 26 mm (1.024 in)].

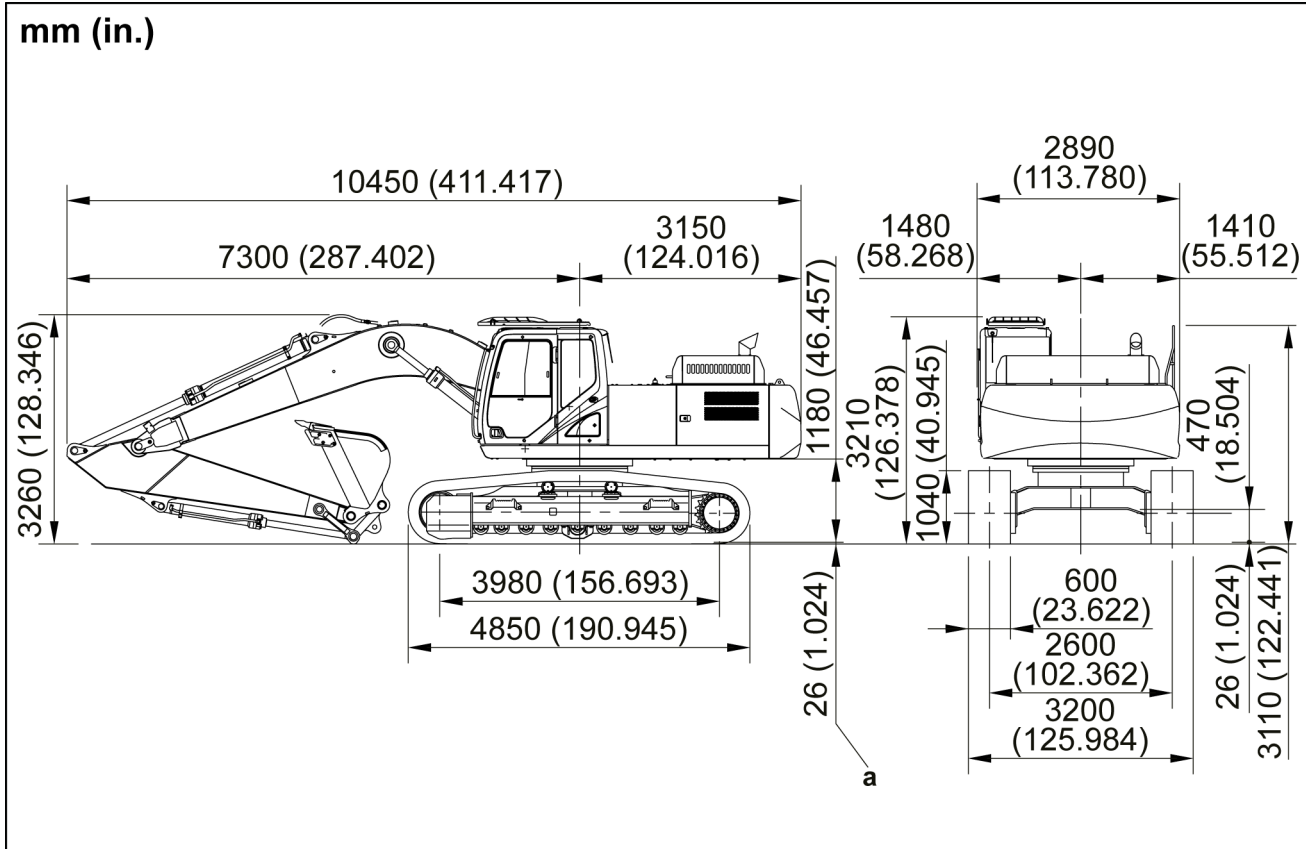

SML15CEX5470FA 1

**Short arm [ 2.65 m (8.6942 ft)]**


**NOTE:** 1. Numbers are subject to change without notice due to design change or other reason.  
 2. The diagrams give values that include the shoe lug height (a) [ 26 mm (1.024 in)].

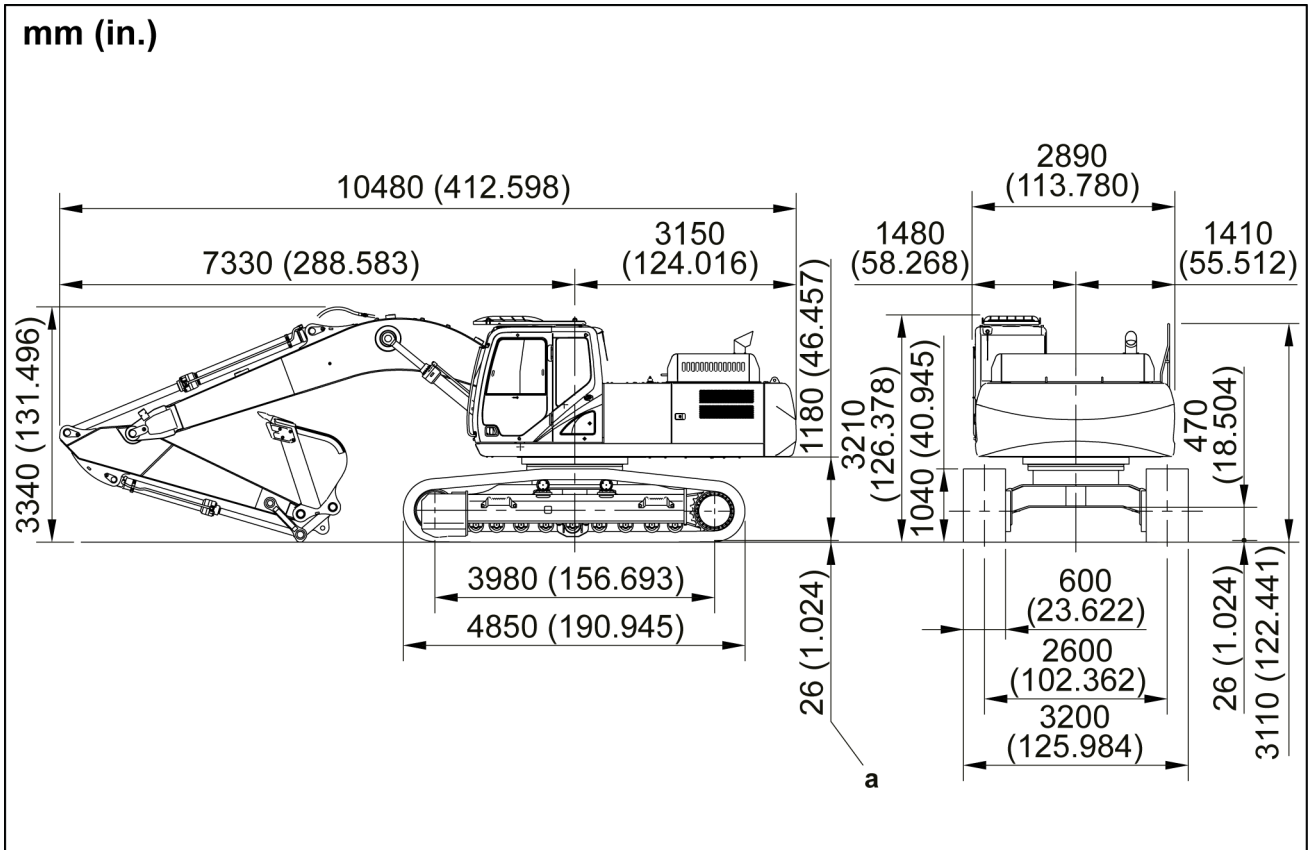

SMIL15CEX5471FA 2

**Long arm [ 3.66 m (12.0079 ft)]**

**NOTE:** 1. Numbers are subject to change without notice due to design change or other reason.  
 2. The diagrams give values that include the shoe lug height (a) [ 26 mm (1.024 in)].

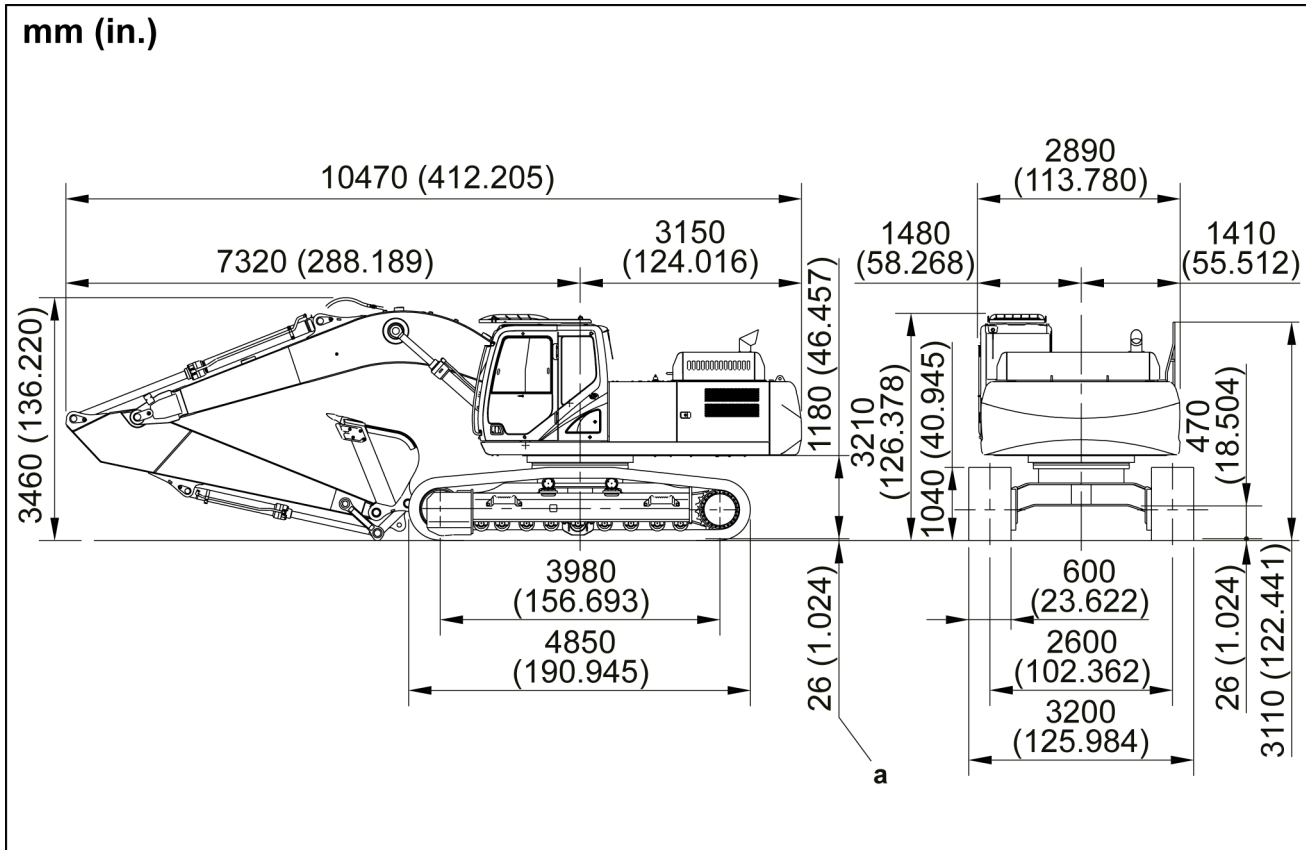

SMIL15CEX5472FA 3

## Conversion factors

### Unit conversion rate

| Gravitational unit    | - x →<br>← ÷ -       | SI unit           |
|-----------------------|----------------------|-------------------|
| kgf                   | 9.807                | N                 |
| lbf                   | 4.448                | N                 |
| kgf·cm                | 0.0981               | N·m               |
| lbf·ft                | 1.356                | N·m               |
| lbf·in                | 0.113                | N·m               |
| kgf/cm <sup>2</sup>   | 0.0981               | MPa               |
| atm                   | 0.1013               | MPa               |
| lbf/in <sup>2</sup>   | 0.0069               | MPa               |
| mm Hg                 | 133.3                | Pa                |
| in Hg                 | 3386                 | Pa                |
| kgf· m/s              | 0.00981              | kW                |
| lbf·ft/s              | 0.00136              | kW                |
| PS                    | 0.7355               | kW                |
| HP                    | 0.746                | kW                |
| kgf·m                 | 9.807                | J                 |
| kcal                  | 4186                 | J                 |
| kgf·s/cm <sup>2</sup> | 98067                | Pa·s              |
| cP                    | 0.001                | Pa·s              |
| P                     | 0.1                  | Pa·s              |
| cSt                   | 1 x 10 <sup>-6</sup> | m <sup>2</sup> /s |
| St                    | 0.0001               | m <sup>2</sup> /s |

### Length

#### Millimeters to inches

| mm | In.    | mm | In.    | mm | In.    | mm  | In.    |
|----|--------|----|--------|----|--------|-----|--------|
| 1  | 0.0394 | 26 | 1.0236 | 51 | 2.0079 | 76  | 2.9921 |
| 2  | 0.0787 | 27 | 1.0630 | 52 | 2.0472 | 77  | 3.0315 |
| 3  | 0.1181 | 28 | 1.1024 | 53 | 2.0866 | 78  | 3.0709 |
| 4  | 0.1575 | 29 | 1.1417 | 54 | 2.1260 | 79  | 3.1102 |
| 5  | 0.1969 | 30 | 1.1811 | 55 | 2.1654 | 80  | 3.1496 |
| 6  | 0.2362 | 31 | 1.2205 | 56 | 2.2047 | 81  | 3.1890 |
| 7  | 0.2756 | 32 | 1.2598 | 57 | 2.2441 | 82  | 3.2283 |
| 8  | 0.3150 | 33 | 1.2992 | 58 | 2.2835 | 83  | 3.2677 |
| 9  | 0.3543 | 34 | 1.3386 | 59 | 2.3228 | 84  | 3.3071 |
| 10 | 0.3937 | 35 | 1.3780 | 60 | 2.3622 | 85  | 3.3465 |
| 11 | 0.4331 | 36 | 1.4173 | 61 | 2.4016 | 86  | 3.3858 |
| 12 | 0.4724 | 37 | 1.4567 | 62 | 2.4409 | 87  | 3.4252 |
| 13 | 0.5118 | 38 | 1.4961 | 63 | 2.4803 | 88  | 3.4646 |
| 14 | 0.5512 | 39 | 1.5354 | 64 | 2.5197 | 89  | 3.5039 |
| 15 | 0.5906 | 40 | 1.5748 | 65 | 2.5591 | 90  | 3.5433 |
| 16 | 0.6299 | 41 | 1.6142 | 66 | 2.5984 | 91  | 3.5827 |
| 17 | 0.6693 | 42 | 1.6535 | 67 | 2.6378 | 92  | 3.6220 |
| 18 | 0.7087 | 43 | 1.6929 | 68 | 2.6772 | 93  | 3.6614 |
| 19 | 0.7480 | 44 | 1.7323 | 69 | 2.7165 | 94  | 3.7008 |
| 20 | 0.7874 | 45 | 1.7717 | 70 | 2.7559 | 95  | 3.7402 |
| 21 | 0.8268 | 46 | 1.8110 | 71 | 2.7953 | 96  | 3.7795 |
| 22 | 0.8661 | 47 | 1.8504 | 72 | 2.8346 | 97  | 3.8189 |
| 23 | 0.9055 | 48 | 1.8898 | 73 | 2.8740 | 98  | 3.8583 |
| 24 | 0.9449 | 49 | 1.9291 | 74 | 2.9134 | 99  | 3.8976 |
| 25 | 0.9843 | 50 | 1.9685 | 75 | 2.9528 | 100 | 3.9370 |



INTRODUCTION

**Inches to millimeters**

| in.   | mm     | in.   | mm      | in.   | mm      | in.   | mm      |
|-------|--------|-------|---------|-------|---------|-------|---------|
| 1/64  | 0.3969 | 17/64 | 6.7469  | 33/64 | 13.0969 | 49/64 | 19.4469 |
| 1/32  | 0.7938 | 9/32  | 7.1438  | 17/32 | 13.4938 | 25/32 | 19.8438 |
| 3/64  | 1.1906 | 19/64 | 7.5406  | 35/64 | 13.8906 | 51/64 | 20.2406 |
| 1/16  | 1.5875 | 5/16  | 7.9375  | 9/16  | 14.2875 | 13/16 | 20.6375 |
| 5/64  | 1.9844 | 21/64 | 8.3344  | 37/64 | 14.6844 | 53/64 | 21.0344 |
| 3/32  | 2.3813 | 11/32 | 8.7313  | 19/32 | 15.0813 | 27/32 | 21.4313 |
| 7/64  | 2.7781 | 23/64 | 9.1281  | 39/64 | 15.4781 | 55/64 | 21.8281 |
| 1/8   | 3.1750 | 3/8   | 9.5250  | 5/8   | 15.8750 | 7/8   | 22.2250 |
| 9/64  | 3.5719 | 25/64 | 9.9218  | 41/64 | 16.2719 | 57/64 | 22.6219 |
| 5/32  | 3.9688 | 13/32 | 10.3188 | 21/32 | 16.6688 | 29/32 | 23.0188 |
| 11/64 | 4.3656 | 27/64 | 10.7156 | 43/64 | 17.0656 | 59/64 | 23.4156 |
| 3/16  | 4.7625 | 7/16  | 11.1125 | 11/16 | 17.4625 | 15/16 | 23.8125 |
| 13/64 | 5.1594 | 29/64 | 11.5094 | 45/64 | 17.8594 | 61/64 | 24.2094 |
| 7/32  | 5.5563 | 15/32 | 11.9063 | 23/32 | 18.2563 | 31/32 | 24.6063 |
| 15/64 | 5.9531 | 31/64 | 12.3031 | 47/64 | 18.6531 | 63/64 | 25.0031 |
| 1/4   | 6.3500 | 1/2   | 12.7000 | 3/4   | 19.0500 | 1     | 25.4000 |

**Feet to meters**

| ft.  | 0      | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | ft.  |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|
|      | m      | m      | m      | m      | m      | m      | m      | m      | m      | m      |      |
| ---- |        | 0.305  | 0.610  | 0.914  | 1.219  | 1.524  | 1.829  | 2.134  | 2.438  | 2.743  | ---- |
| 10   | 3.048  | 3.353  | 3.658  | 3.962  | 4.267  | 4.572  | 4.877  | 5.182  | 5.486  | 5.791  | 10   |
| 20   | 6.096  | 6.401  | 6.706  | 7.010  | 7.315  | 7.620  | 7.925  | 8.230  | 8.534  | 8.839  | 20   |
| 30   | 9.144  | 9.449  | 9.754  | 10.058 | 10.363 | 10.668 | 10.973 | 11.278 | 11.582 | 11.887 | 30   |
| 40   | 12.192 | 12.497 | 12.802 | 13.106 | 13.411 | 13.716 | 14.021 | 14.326 | 14.630 | 14.935 | 40   |
| 50   | 15.24  | 15.545 | 15.850 | 16.154 | 16.459 | 16.764 | 17.069 | 17.374 | 17.678 | 17.983 | 50   |
| 60   | 18.288 | 18.593 | 18.898 | 19.202 | 19.507 | 19.812 | 20.117 | 20.422 | 20.726 | 21.031 | 60   |
| 70   | 21.336 | 21.641 | 21.946 | 22.250 | 22.555 | 22.860 | 23.165 | 23.470 | 23.774 | 24.079 | 70   |
| 80   | 24.384 | 24.689 | 24.994 | 25.298 | 25.603 | 25.908 | 26.213 | 26.518 | 26.822 | 27.127 | 80   |
| 90   | 27.432 | 27.737 | 28.042 | 28.346 | 28.651 | 28.956 | 29.261 | 29.566 | 29.870 | 30.175 | 90   |
| 100  | 30.480 | 30.785 | 31.090 | 31.394 | 31.699 | 32.004 | 32.309 | 32.614 | 32.918 | 33.223 | 100  |

**Meters to feet**

| m    | 0       | 1       | 2       | 3       | 4        | 5       | 6        | 7       | 8       | 9       | m    |
|------|---------|---------|---------|---------|----------|---------|----------|---------|---------|---------|------|
|      | ft.     | ft.     | ft.     | ft.     | ft.      | ft.     | ft.      | ft.     | ft.     | ft.     |      |
| ---- |         | 3.2808  | 6.5617  | 9.8425  | 13.1234  | 16.4042 | 19.685   | 22.9659 | 26.2467 | 29.5276 | ---- |
| 10   | 32.8084 | 36.0892 | 39.3701 | 42.6509 | 45.9318  | 49.2126 | 52.4934  | 55.7743 | 59.0551 | 62.3360 | 10   |
| 20   | 65.6168 | 68.8976 | 72.1785 | 75.4593 | 78.7402  | 82.0210 | 85.3018  | 88.5827 | 91.8635 | 95.1444 | 20   |
| 30   | 98.4252 | 101.706 | 104.986 | 108.267 | 111.5486 | 114.829 | 118.1102 | 121.391 | 124.671 | 127.952 | 30   |
| 40   | 131.233 | 134.514 | 137.795 | 141.076 | 144.357  | 147.637 | 150.918  | 154.199 | 157.480 | 160.761 | 40   |
| 50   | 164.042 | 167.322 | 170.603 | 173.884 | 177.165  | 180.446 | 183.727  | 187.007 | 190.288 | 193.569 | 50   |
| 60   | 196.850 | 200.131 | 203.412 | 206.692 | 209.973  | 213.254 | 216.535  | 219.816 | 223.097 | 226.378 | 60   |
| 70   | 229.658 | 232.939 | 236.220 | 239.501 | 242.782  | 246.063 | 249.343  | 252.624 | 255.905 | 259.186 | 70   |
| 80   | 262.467 | 265.748 | 269.028 | 272.309 | 275.590  | 278.871 | 282.152  | 285.433 | 288.713 | 291.994 | 80   |
| 90   | 295.275 | 298.556 | 301.837 | 305.118 | 308.399  | 311.679 | 314.960  | 318.241 | 321.522 | 324.803 | 90   |
| 100  | 328.084 | 331.364 | 334.645 | 337.926 | 341.207  | 344.488 | 347.769  | 351.049 | 354.330 | 357.611 | 100  |

INTRODUCTION

**Miles to kilometers**

| miles | 0       | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | miles |
|-------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
|       | km      | km      | km      | km      | km      | km      | km      | km      | km      | km      |       |
| ----  |         | 1.609   | 3.219   | 4.828   | 6.437   | 8.047   | 9.656   | 11.265  | 12.875  | 14.484  | ----  |
| 10    | 16.093  | 17.703  | 19.312  | 20.921  | 22.531  | 24.140  | 25.750  | 27.359  | 28.968  | 30.578  | 10    |
| 20    | 32.187  | 33.796  | 35.406  | 37.015  | 38.624  | 40.234  | 41.843  | 43.452  | 45.062  | 46.671  | 20    |
| 30    | 48.280  | 49.890  | 51.499  | 53.108  | 54.718  | 56.327  | 57.936  | 59.546  | 61.155  | 62.764  | 30    |
| 40    | 64.374  | 65.983  | 67.592  | 69.202  | 70.811  | 72.420  | 74.030  | 75.639  | 77.249  | 78.858  | 40    |
| 50    | 80.467  | 82.077  | 83.686  | 85.295  | 86.905  | 88.514  | 90.123  | 91.733  | 93.342  | 94.951  | 50    |
| 60    | 96.561  | 98.170  | 99.779  | 101.39  | 102.998 | 104.607 | 106.217 | 107.826 | 109.435 | 111.045 | 60    |
| 70    | 112.654 | 114.263 | 115.873 | 117.482 | 119.091 | 120.701 | 122.310 | 123.919 | 125.529 | 127.138 | 70    |
| 80    | 128.748 | 130.357 | 131.966 | 133.576 | 135.185 | 136.794 | 138.404 | 140.013 | 141.622 | 143.232 | 80    |
| 90    | 144.841 | 146.450 | 148.060 | 149.669 | 151.278 | 152.888 | 154.497 | 156.106 | 157.716 | 159.325 | 90    |
| 100   | 160.934 | 162.544 | 164.153 | 165.762 | 167.372 | 168.981 | 170.590 | 172.200 | 173.809 | 175.418 | 100   |

**Kilometers to miles**

| km   | 0      | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | km   |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|
|      | miles  | miles  | miles  | miles  | miles  | miles  | miles  | miles  | miles  | miles  |      |
| ---- |        | 0.621  | 1.243  | 1.864  | 2.485  | 3.107  | 3.728  | 4.350  | 4.971  | 5.592  | ---- |
| 10   | 6.214  | 6.835  | 7.456  | 8.078  | 8.699  | 9.321  | 9.942  | 10.563 | 11.185 | 11.806 | 10   |
| 20   | 12.427 | 13.049 | 13.670 | 14.292 | 14.913 | 15.534 | 16.156 | 16.777 | 17.398 | 18.020 | 20   |
| 30   | 18.641 | 19.263 | 19.884 | 20.505 | 21.127 | 21.748 | 22.369 | 22.991 | 23.612 | 24.233 | 30   |
| 40   | 24.855 | 25.476 | 26.098 | 26.719 | 27.340 | 27.962 | 28.583 | 29.204 | 29.826 | 30.447 | 40   |
| 50   | 31.069 | 31.690 | 32.311 | 32.933 | 33.554 | 34.175 | 34.797 | 35.418 | 36.040 | 36.661 | 50   |
| 60   | 37.282 | 37.904 | 38.525 | 39.146 | 39.768 | 40.389 | 41.010 | 41.632 | 42.253 | 42.875 | 60   |
| 70   | 43.496 | 44.117 | 44.739 | 45.360 | 45.981 | 46.603 | 47.224 | 47.846 | 48.467 | 49.088 | 70   |
| 80   | 49.710 | 50.331 | 50.952 | 51.574 | 52.195 | 52.817 | 53.438 | 54.059 | 54.681 | 55.302 | 80   |
| 90   | 55.923 | 56.545 | 57.166 | 57.788 | 58.409 | 59.03  | 59.652 | 60.273 | 60.894 | 61.516 | 90   |
| 100  | 62.137 | 62.758 | 63.380 | 64.001 | 64.623 | 65.244 | 65.865 | 66.487 | 67.108 | 67.729 | 100  |

**Area**

**Square inches to square centimeters**

| in <sup>2</sup> | 0               | 1               | 2               | 3               | 4               | 5               | 6               | 7               | 8               | 9               | in <sup>2</sup> |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                 | cm <sup>2</sup> | cm <sup>2</sup> | cm <sup>2</sup> | cm <sup>2</sup> | cm <sup>2</sup> | cm <sup>2</sup> | cm <sup>2</sup> | cm <sup>2</sup> | cm <sup>2</sup> | cm <sup>2</sup> |                 |
| ----            |                 | 6.452           | 12.903          | 19.355          | 25.806          | 32.258          | 38.710          | 45.161          | 51.613          | 58.065          | ----            |
| 10              | 64.516          | 70.968          | 77.419          | 83.871          | 90.323          | 96.774          | 103.226         | 109.677         | 116.129         | 122.581         | 10              |
| 20              | 129.032         | 135.484         | 141.935         | 148.387         | 154.839         | 161.290         | 167.742         | 174.194         | 180.645         | 187.097         | 20              |
| 30              | 193.548         | 200.000         | 206.452         | 212.903         | 219.355         | 225.806         | 232.258         | 238.710         | 245.161         | 251.613         | 30              |
| 40              | 258.065         | 264.516         | 270.968         | 277.419         | 283.871         | 290.323         | 296.774         | 303.226         | 309.677         | 316.129         | 40              |
| 50              | 322.581         | 329.032         | 335.484         | 341.935         | 348.387         | 354.839         | 361.290         | 367.742         | 374.194         | 380.645         | 50              |
| 60              | 387.097         | 393.548         | 400.000         | 406.452         | 412.903         | 419.355         | 425.806         | 432.258         | 438.710         | 445.161         | 60              |
| 70              | 451.613         | 458.065         | 464.516         | 470.968         | 477.419         | 483.871         | 490.323         | 496.774         | 503.226         | 509.677         | 70              |
| 80              | 516.129         | 522.581         | 529.032         | 535.484         | 541.935         | 548.387         | 554.839         | 561.290         | 567.742         | 574.194         | 80              |
| 90              | 580.645         | 587.097         | 593.548         | 600.000         | 606.452         | 612.903         | 619.355         | 625.806         | 632.258         | 638.710         | 90              |
| 100             | 645.161         | 651.613         | 658.065         | 664.516         | 670.968         | 677.419         | 683.871         | 690.323         | 696.774         | 703.226         | 100             |

INTRODUCTION

**Square centimeters to square inches**

| cm <sup>2</sup> | 0               | 1               | 2               | 3               | 4               | 5               | 6               | 7               | 8               | 9               | cm <sup>2</sup> |
|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                 | in <sup>2</sup> | in <sup>2</sup> | in <sup>2</sup> | in <sup>2</sup> | in <sup>2</sup> | in <sup>2</sup> | in <sup>2</sup> | in <sup>2</sup> | in <sup>2</sup> | in <sup>2</sup> |                 |
| ----            |                 | 0.155           | 0.310           | 0.465           | 0.620           | 0.775           | 0.930           | 1.085           | 1.240           | 1.395           | ----            |
| 10              | 1.550           | 1.705           | 1.860           | 2.015           | 2.170           | 2.325           | 2.480           | 2.635           | 2.790           | 2.945           | 10              |
| 20              | 3.100           | 3.255           | 3.410           | 3.565           | 3.720           | 3.875           | 4.030           | 4.185           | 4.340           | 4.495           | 20              |
| 30              | 4.650           | 4.805           | 4.960           | 5.115           | 5.270           | 5.425           | 5.580           | 5.735           | 5.890           | 6.045           | 30              |
| 40              | 6.200           | 6.355           | 6.510           | 6.665           | 6.820           | 6.975           | 7.130           | 7.285           | 7.440           | 7.595           | 40              |
| 50              | 7.750           | 7.905           | 8.060           | 8.215           | 8.370           | 8.525           | 8.680           | 8.835           | 8.990           | 9.145           | 50              |
| 60              | 9.300           | 9.455           | 9.610           | 9.765           | 9.920           | 10.075          | 10.230          | 10.385          | 10.540          | 10.695          | 60              |
| 70              | 10.850          | 11.005          | 11.160          | 11.315          | 11.470          | 11.625          | 11.780          | 11.935          | 12.090          | 12.245          | 70              |
| 80              | 12.400          | 12.555          | 12.710          | 12.865          | 13.020          | 13.175          | 13.330          | 13.485          | 13.640          | 13.795          | 80              |
| 90              | 13.950          | 14.105          | 14.260          | 14.415          | 14.570          | 14.725          | 14.880          | 15.035          | 15.190          | 15.345          | 90              |
| 100             | 15.500          | 15.655          | 15.810          | 15.965          | 16.120          | 16.275          | 16.430          | 16.585          | 16.740          | 16.895          | 100             |

**Volume**

**Cubic inches to cubic centimeters**

| in <sup>3</sup> | 0                       | 1                       | 2                       | 3                       | 4                       | 5                       | 6                       | 7                       | 8                       | 9                       | in <sup>3</sup> |
|-----------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-----------------|
|                 | cm <sup>3</sup><br>(cc) | cm <sup>3</sup><br>(cc) | cm <sup>3</sup><br>(cc) | cm <sup>3</sup><br>(cc) | cm <sup>3</sup><br>(cc) | cm <sup>3</sup><br>(cc) | cm <sup>3</sup><br>(cc) | cm <sup>3</sup><br>(cc) | cm <sup>3</sup><br>(cc) | cm <sup>3</sup><br>(cc) |                 |
| ----            |                         | 16.387                  | 32.774                  | 49.161                  | 65.548                  | 81.936                  | 98.323                  | 114.710                 | 131.097                 | 147.484                 | ----            |
| 10              | 163.871                 | 180.258                 | 196.645                 | 213.032                 | 229.419                 | 245.807                 | 262.194                 | 278.581                 | 294.968                 | 311.355                 | 10              |
| 20              | 327.742                 | 344.129                 | 360.516                 | 376.903                 | 393.290                 | 409.678                 | 426.065                 | 442.452                 | 458.839                 | 475.226                 | 20              |
| 30              | 491.613                 | 508.000                 | 524.387                 | 540.774                 | 557.161                 | 573.549                 | 589.936                 | 606.323                 | 622.710                 | 639.097                 | 30              |
| 40              | 655.484                 | 671.871                 | 688.258                 | 704.645                 | 721.033                 | 737.420                 | 753.807                 | 770.194                 | 786.581                 | 802.968                 | 40              |
| 50              | 819.355                 | 835.742                 | 852.129                 | 868.516                 | 884.904                 | 901.291                 | 917.678                 | 934.065                 | 950.452                 | 966.839                 | 50              |
| 60              | 983.226                 | 999.613                 | 0                       | 7                       | 5                       | 2                       | 9                       | 6                       | 1114.323                | 0                       | 60              |
| 70              | 1147.09                 | 1163.48                 | 1179.87                 | 1196.25                 | 1212.64                 | 1229.03                 | 1245.42                 | 1261.80                 | 1278.19                 | 1294.58                 | 70              |
|                 | 7                       | 4                       | 1                       | 8                       | 6                       | 3                       | 0                       | 7                       | 4                       | 1                       |                 |
| 80              | 1310.96                 | 1327.35                 | 1343.74                 | 1360.13                 | 1376.51                 | 1392.90                 | 1409.29                 | 1425.67                 | 1442.06                 | 1458.45                 | 80              |
|                 | 8                       | 5                       | 2                       | 0                       | 7                       | 4                       | 1                       | 8                       | 5                       | 2                       |                 |
| 90              | 1474.83                 | 1491.22                 | 1507.61                 | 1524.00                 | 1540.38                 | 1556.77                 | 1573.16                 | 1589.54                 | 1605.93                 | 1622.32                 | 90              |
|                 | 9                       | 6                       | 3                       | 1                       | 8                       | 5                       | 2                       | 9                       | 6                       | 3                       |                 |
| 100             | 1638.71                 | 1655.09                 | 1671.48                 | 1687.87                 | 1704.25                 | 1720.64                 | 1737.03                 | 1753.42                 | 1769.80                 | 1786.19                 | 100             |
|                 | 0                       | 7                       | 4                       | 2                       | 9                       | 6                       | 3                       | 0                       | 7                       | 4                       |                 |

**Cubic centimeters to cubic inches**

| cm <sup>3</sup><br>(cc) | 0               | 1               | 2               | 3               | 4               | 5               | 6               | 7               | 8               | 9               | cm <sup>3</sup><br>(cc) |
|-------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------------|
|                         | in <sup>3</sup> | in <sup>3</sup> | in <sup>3</sup> | in <sup>3</sup> | in <sup>3</sup> | in <sup>3</sup> | in <sup>3</sup> | in <sup>3</sup> | in <sup>3</sup> | in <sup>3</sup> |                         |
| ----                    |                 | 0.0610          | 0.1220          | 0.1831          | 0.2441          | 0.3051          | 0.3661          | 0.4272          | 0.4882          | 0.5492          | ----                    |
| 10                      | 0.6102          | 0.6713          | 0.7323          | 0.7933          | 0.8543          | 0.9154          | 0.9764          | 1.0374          | 1.0984          | 1.1594          | 10                      |
| 20                      | 1.2205          | 1.2815          | 1.3425          | 1.4035          | 1.4646          | 1.5256          | 1.5866          | 1.6476          | 1.7087          | 1.7697          | 20                      |
| 30                      | 1.8307          | 1.8917          | 1.9528          | 2.0138          | 2.0748          | 2.1358          | 2.1968          | 2.2579          | 2.3189          | 2.3799          | 30                      |
| 40                      | 2.4409          | 2.5020          | 2.5630          | 2.6240          | 2.6850          | 2.7461          | 2.8071          | 2.8681          | 2.9291          | 2.9902          | 40                      |
| 50                      | 3.0512          | 3.1122          | 3.1732          | 3.2343          | 3.2953          | 3.3563          | 3.4173          | 3.4784          | 3.5394          | 3.6004          | 50                      |
| 60                      | 3.6614          | 3.7224          | 3.7835          | 3.8445          | 3.9055          | 3.9665          | 4.0276          | 4.0886          | 4.1496          | 4.2106          | 60                      |
| 70                      | 4.2717          | 4.3327          | 4.3937          | 4.4547          | 4.5157          | 4.5768          | 4.6378          | 4.6988          | 4.7598          | 4.8209          | 70                      |
| 80                      | 4.8819          | 4.9429          | 5.0039          | 5.0650          | 5.1260          | 5.1870          | 5.2480          | 5.3091          | 5.3701          | 5.4311          | 80                      |
| 90                      | 5.4921          | 5.5531          | 5.6142          | 5.6752          | 5.7362          | 5.7972          | 5.8583          | 5.9193          | 5.9803          | 6.0413          | 90                      |
| 100                     | 6.1024          | 6.1634          | 6.2244          | 6.2854          | 6.3465          | 6.4075          | 6.4685          | 6.5295          | 6.5905          | 6.6516          | 100                     |

INTRODUCTION

**Gallons (U.S) to liters**

| U.S.-gal. | 0       | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | U.S.-gal. |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-----------|
|           | liters  | liters  | liters  | liters  | liters  | liters  | liters  | liters  | liters  | liters  |           |
| ----      |         | 3.7853  | 7.5707  | 11.3560 | 15.1413 | 18.9266 | 22.7120 | 26.4973 | 30.2826 | 34.0680 | ----      |
| 10        | 37.8533 | 41.6386 | 45.4239 | 49.2093 | 52.9946 | 56.7799 | 60.5653 | 64.3506 | 68.1359 | 71.9213 | 10        |
| 20        | 75.7066 | 79.4919 | 83.2772 | 87.0626 | 90.8479 | 94.6332 | 98.4186 | 102.203 | 105.989 | 109.774 | 20        |
| 30        | 113.559 | 117.345 | 121.130 | 124.915 | 128.701 | 132.486 | 136.271 | 140.057 | 143.842 | 147.627 | 30        |
|           | 9       | 2       | 5       | 9       | 2       | 5       | 8       | 2       | 5       | 8       |           |
| 40        | 151.413 | 155.198 | 158.983 | 162.769 | 166.554 | 170.339 | 174.125 | 177.910 | 181.695 | 185.481 | 40        |
|           | 2       | 5       | 8       | 1       | 5       | 8       | 1       | 5       | 8       | 1       |           |
| 50        | 189.266 | 193.051 | 196.837 | 200.622 | 204.407 | 208.193 | 211.978 | 215.763 | 219.549 | 223.334 | 50        |
|           | 5       | 8       | 1       | 4       | 8       | 1       | 4       | 8       | 1       | 4       |           |
| 60        | 227.119 | 230.905 | 234.690 | 238.475 | 242.261 | 246.046 | 249.831 | 253.617 | 257.402 | 261.187 | 60        |
|           | 7       | 1       | 4       | 7       | 1       | 4       | 7       | 0       | 4       | 7       |           |
| 70        | 264.973 | 268.758 | 272.543 | 276.329 | 280.114 | 283.899 | 287.685 | 291.470 | 295.255 | 299.041 | 70        |
|           | 0       | 4       | 7       | 0       | 3       | 7       | 0       | 3       | 7       | 0       |           |
| 80        | 302.826 | 306.611 | 310.397 | 314.182 | 317.967 | 321.753 | 325.538 | 329.323 | 333.109 | 336.894 | 80        |
|           | 3       | 6       | 0       | 3       | 6       | 0       | 3       | 6       | 0       | 3       |           |
| 90        | 340.679 | 344.464 | 348.250 | 352.035 | 355.820 | 359.606 | 363.391 | 367.176 | 370.962 | 374.747 | 90        |
|           | 6       | 9       | 3       | 6       | 9       | 3       | 6       | 9       | 2       | 6       |           |
| 100       | 378.532 | 382.318 | 386.103 | 389.888 | 393.674 | 397.459 | 401.244 | 405.030 | 408.815 | 412.600 | 100       |
|           | 9       | 2       | 6       | 9       | 2       | 5       | 9       | 2       | 5       | 9       |           |

**Liters to gallons (U.S)**

| liters | 0        | 1        | 2        | 3        | 4        | 5        | 6        | 7        | 8        | 9        | liters |
|--------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|--------|
|        | U.S.gal. | U.S.gal. | U.S.gal. | U.S.gal. | U.S.gal. | U.S.gal. | U.S.gal. | U.S.gal. | U.S.gal. | U.S.gal. |        |
| ----   |          | 0.2642   | 0.5284   | 0.7925   | 1.0567   | 1.3209   | 1.5851   | 1.8492   | 2.1134   | 2.3776   | ----   |
| 10     | 2.6418   | 2.9060   | 3.1701   | 3.4343   | 3.6985   | 3.9627   | 4.2268   | 4.4910   | 4.7552   | 5.0194   | 10     |
| 20     | 5.2836   | 5.5477   | 5.8119   | 6.0761   | 6.3403   | 6.6044   | 6.8686   | 7.1328   | 7.3970   | 7.6612   | 20     |
| 30     | 7.9253   | 8.1895   | 8.4537   | 8.7179   | 8.9820   | 9.2462   | 9.5104   | 9.7746   | 10.0388  | 10.3029  | 30     |
| 40     | 10.5671  | 10.8313  | 11.0955  | 11.3596  | 11.6238  | 11.8880  | 12.1522  | 12.4164  | 12.6805  | 12.9447  | 40     |
| 50     | 13.2089  | 13.4731  | 13.7372  | 14.0014  | 14.2656  | 14.5298  | 14.7940  | 15.0581  | 15.3223  | 15.5865  | 50     |
| 60     | 15.8507  | 16.1148  | 16.3790  | 16.6432  | 16.9074  | 17.1716  | 17.4357  | 17.6999  | 17.9641  | 18.2283  | 60     |
| 70     | 18.4924  | 18.7566  | 19.0208  | 19.2850  | 19.5492  | 19.8133  | 20.0775  | 20.3417  | 20.6059  | 20.8700  | 70     |
| 80     | 21.1342  | 21.3984  | 21.6626  | 21.9268  | 22.1909  | 22.4551  | 22.7193  | 22.9835  | 23.2476  | 23.5118  | 80     |
| 90     | 23.7760  | 24.0402  | 24.3044  | 24.5685  | 24.8327  | 25.0969  | 25.3611  | 25.6252  | 25.8894  | 26.1536  | 90     |
| 100    | 26.4178  | 26.6820  | 26.9461  | 27.2103  | 27.4745  | 27.7387  | 28.0028  | 28.2670  | 28.5312  | 28.7954  | 100    |

INTRODUCTION

**Gallons (Imp.) to liters**

| Imp-gal. | 0       | 1       | 2        | 3       | 4       | 5       | 6       | 7       | 8       | 9       | Imp-gal. |
|----------|---------|---------|----------|---------|---------|---------|---------|---------|---------|---------|----------|
|          | liters  | liters  | liters   | liters  | liters  | liters  | liters  | liters  | liters  | liters  |          |
| ----     |         | 4.5455  | 9.0909   | 13.6364 | 18.1818 | 22.7273 | 27.2727 | 31.8182 | 36.3636 | 40.9091 | ----     |
| 10       | 45.4545 | 50.0000 | 54.5455  | 59.0909 | 63.6364 | 68.1818 | 72.7273 | 77.2727 | 81.8182 | 86.3636 | 10       |
| 20       | 90.9091 | 95.4545 | 100.0000 | 104.545 | 109.090 | 113.636 | 118.181 | 122.727 | 127.272 | 131.818 | 20       |
| 30       | 136.363 | 140.909 | 145.454  | 150.000 | 154.545 | 159.090 | 163.636 | 168.181 | 172.727 | 177.272 | 30       |
| 40       | 181.818 | 186.363 | 190.909  | 195.454 | 200.000 | 204.545 | 209.090 | 213.636 | 218.181 | 222.727 | 40       |
| 50       | 227.272 | 231.818 | 236.363  | 240.909 | 245.454 | 250.000 | 254.545 | 259.090 | 263.636 | 268.181 | 50       |
| 60       | 272.727 | 277.272 | 281.818  | 286.363 | 290.909 | 295.454 | 300.000 | 304.545 | 309.090 | 313.636 | 60       |
| 70       | 318.181 | 322.727 | 327.272  | 331.818 | 336.363 | 340.909 | 345.454 | 350.000 | 354.545 | 359.090 | 70       |
| 80       | 363.636 | 368.181 | 372.727  | 377.272 | 381.818 | 386.363 | 390.909 | 395.454 | 400.000 | 404.545 | 80       |
| 90       | 409.090 | 413.636 | 418.181  | 422.727 | 427.272 | 431.818 | 436.363 | 440.909 | 445.454 | 450.000 | 90       |
| 100      | 454.545 | 459.090 | 463.636  | 468.181 | 472.727 | 477.272 | 481.818 | 486.363 | 490.909 | 495.454 | 100      |

**Liters to gallons (Imp.)**

| liters | 0        | 1        | 2        | 3        | 4        | 5        | 6        | 7        | 8       | 9        | liters |
|--------|----------|----------|----------|----------|----------|----------|----------|----------|---------|----------|--------|
|        | Imp-gal. | Imp-gal. | Imp-gal. | Imp-gal. | Imp-gal. | Imp-gal. | Imp-gal. | Imp-gal. | Imp.    | Imp-gal. |        |
| ----   |          | 0.2200   | 0.4400   | 0.6600   | 0.8800   | 1.1000   | 1.3200   | 1.5400   | 1.7600  | 1.9800   | ----   |
| 10     | 2.2000   | 2.4200   | 2.6400   | 2.8600   | 3.0800   | 3.3000   | 3.5200   | 3.7400   | 3.9600  | 4.1800   | 10     |
| 20     | 4.4000   | 4.6200   | 4.8400   | 5.0600   | 5.2800   | 5.5000   | 5.7200   | 5.9400   | 6.1600  | 6.3800   | 20     |
| 30     | 6.6000   | 6.8200   | 7.0400   | 7.2600   | 7.4800   | 7.7000   | 7.9200   | 8.1400   | 8.3600  | 8.5800   | 30     |
| 40     | 8.8000   | 9.0200   | 9.2400   | 9.4600   | 9.6800   | 9.9000   | 10.1200  | 10.3400  | 10.5600 | 10.7800  | 40     |
| 50     | 11.0000  | 11.2200  | 11.4400  | 11.6600  | 11.8800  | 12.1000  | 12.3200  | 12.5400  | 12.7600 | 12.9800  | 50     |
| 60     | 13.2000  | 13.4200  | 13.6400  | 13.8600  | 14.0800  | 14.3000  | 14.5200  | 14.7400  | 14.9600 | 15.1800  | 60     |
| 70     | 15.4000  | 15.6200  | 15.8400  | 16.0600  | 16.2800  | 16.5000  | 16.7200  | 16.9400  | 17.1600 | 17.3800  | 70     |
| 80     | 17.6000  | 17.8200  | 18.0400  | 18.2600  | 18.4800  | 18.7000  | 18.9200  | 19.1400  | 19.3600 | 19.5800  | 80     |
| 90     | 19.8000  | 20.0200  | 20.2400  | 20.4600  | 20.6800  | 20.9000  | 21.1200  | 21.3400  | 21.5600 | 21.7800  | 90     |
| 100    | 22.0000  | 22.2200  | 22.4400  | 22.6600  | 22.8800  | 23.1000  | 23.3200  | 23.5400  | 23.7600 | 23.9800  | 100    |

**Weight**

**Pounds to kilograms**

| lbs. | 0      | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | lbs. |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|
|      | kg     | kg     | kg     | kg     | kg     | kg     | kg     | kg     | kg     | kg     |      |
| ---- |        | 0.454  | 0.907  | 1.361  | 1.814  | 2.268  | 2.722  | 3.175  | 3.629  | 4.082  | ---- |
| 10   | 4.536  | 4.989  | 5.443  | 5.897  | 6.350  | 6.804  | 7.257  | 7.711  | 8.165  | 8.618  | 10   |
| 20   | 9.072  | 9.525  | 9.979  | 10.433 | 10.886 | 11.340 | 11.793 | 12.247 | 12.701 | 13.154 | 20   |
| 30   | 13.608 | 14.061 | 14.515 | 14.968 | 15.422 | 15.876 | 16.329 | 16.783 | 17.236 | 17.690 | 30   |
| 40   | 18.144 | 18.597 | 19.051 | 19.504 | 19.958 | 20.412 | 20.865 | 21.319 | 21.772 | 22.226 | 40   |
| 50   | 22.680 | 23.133 | 23.587 | 24.040 | 24.494 | 24.947 | 25.401 | 25.855 | 26.308 | 26.762 | 50   |
| 60   | 27.215 | 27.669 | 28.123 | 28.576 | 29.030 | 29.483 | 29.937 | 30.391 | 30.844 | 31.298 | 60   |
| 70   | 31.751 | 32.205 | 32.658 | 33.112 | 33.566 | 34.019 | 34.473 | 34.926 | 35.380 | 35.834 | 70   |
| 80   | 36.287 | 36.741 | 37.194 | 37.648 | 38.102 | 38.555 | 39.009 | 39.462 | 39.916 | 40.370 | 80   |
| 90   | 40.823 | 41.277 | 41.730 | 42.184 | 42.637 | 43.091 | 43.545 | 43.998 | 44.452 | 44.905 | 90   |
| 100  | 45.359 | 45.813 | 46.266 | 46.720 | 47.173 | 47.627 | 48.081 | 48.534 | 48.988 | 49.441 | 100  |

INTRODUCTION

**Kilograms to pounds**

| kg   | 0       | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | kg   |
|------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------|
|      | lbs.    | lbs.    | lbs.    | lbs.    | lbs.    | lbs.    | lbs.    | lbs.    | lbs.    | lbs.    |      |
| ---- |         | 2.205   | 4.409   | 6.614   | 8.819   | 11.023  | 13.228  | 15.432  | 17.637  | 19.842  | ---- |
| 10   | 22.046  | 24.251  | 26.456  | 28.660  | 30.865  | 33.069  | 35.274  | 37.479  | 39.683  | 41.888  | 10   |
| 20   | 44.093  | 46.297  | 48.502  | 50.707  | 52.911  | 55.116  | 57.320  | 59.525  | 61.730  | 63.934  | 20   |
| 30   | 66.139  | 68.344  | 70.548  | 72.753  | 74.958  | 77.162  | 79.367  | 81.571  | 83.776  | 85.981  | 30   |
| 40   | 88.185  | 90.39   | 92.595  | 94.799  | 97.004  | 99.209  | 101.413 | 103.618 | 105.822 | 108.027 | 40   |
| 50   | 110.232 | 112.436 | 114.641 | 116.846 | 119.050 | 121.255 | 123.460 | 125.664 | 127.869 | 130.073 | 50   |
| 60   | 132.278 | 134.483 | 136.687 | 138.892 | 141.097 | 143.301 | 145.506 | 147.710 | 149.915 | 152.120 | 60   |
| 70   | 154.324 | 156.529 | 158.734 | 160.938 | 163.143 | 165.348 | 167.552 | 169.757 | 171.961 | 174.166 | 70   |
| 80   | 176.371 | 178.575 | 180.780 | 182.985 | 185.189 | 187.394 | 189.599 | 191.803 | 194.008 | 196.212 | 80   |
| 90   | 198.417 | 200.622 | 202.826 | 205.031 | 207.236 | 209.440 | 211.645 | 213.850 | 216.054 | 218.259 | 90   |
| 100  | 220.463 | 222.668 | 224.873 | 227.077 | 229.282 | 231.487 | 233.691 | 235.896 | 238.100 | 240.305 | 100  |

**Weight kilograms to newtons**

| kgf  | 0      | 1      | 2       | 3       | 4       | 5       | 6      | 7       | 8       | 9       | kg   |
|------|--------|--------|---------|---------|---------|---------|--------|---------|---------|---------|------|
|      | N      | N      | N       | N       | N       | N       | N      | N       | N       | N       |      |
| ---- |        | 9.81   | 19.61   | 29.42   | 39.23   | 49.03   | 58.84  | 68.65   | 78.45   | 88.26   | ---- |
| 10   | 98.07  | 107.87 | 117.68  | 127.49  | 137.29  | 147.10  | 156.91 | 166.71  | 176.52  | 186.33  | 10   |
| 20   | 196.13 | 205.94 | 215.75  | 225.55  | 235.36  | 245.17  | 254.97 | 264.78  | 274.59  | 284.39  | 20   |
| 30   | 294.20 | 304.01 | 313.81  | 323.62  | 333.43  | 343.23  | 353.04 | 362.85  | 372.65  | 382.46  | 30   |
| 40   | 392.27 | 402.07 | 411.88  | 421.69  | 431.49  | 441.30  | 451.11 | 460.91  | 470.72  | 480.53  | 40   |
| 50   | 490.33 | 500.14 | 509.95  | 519.75  | 529.56  | 539.37  | 549.17 | 558.98  | 568.79  | 578.59  | 50   |
| 60   | 588.40 | 598.21 | 608.01  | 617.82  | 627.63  | 637.43  | 647.24 | 657.05  | 666.85  | 676.66  | 60   |
| 70   | 686.47 | 696.27 | 706.08  | 715.89  | 725.69  | 735.50  | 745.31 | 755.11  | 764.92  | 774.73  | 70   |
| 80   | 784.53 | 794.34 | 804.15  | 813.95  | 823.76  | 833.57  | 843.37 | 853.18  | 862.99  | 872.79  | 80   |
| 90   | 882.60 | 892.41 | 902.21  | 912.02  | 921.83  | 931.63  | 941.44 | 951.25  | 961.05  | 970.86  | 90   |
| 100  | 980.67 | 990.47 | 1000.28 | 1010.08 | 1019.89 | 1029.70 | 1039.5 | 1049.31 | 1059.12 | 1068.92 | 100  |

**Newtons to weight kilograms**

| N    | 0       | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | N    |
|------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------|
|      | kgf     | kgf     | kgf     | kgf     | kgf     | kgf     | kgf     | kgf     | kgf     | kgf     |      |
| ---- |         | 0.1020  | 0.2039  | 0.3059  | 0.4079  | 0.5099  | 0.6118  | 0.7138  | 0.8158  | 0.9177  | ---- |
| 10   | 1.0197  | 1.1217  | 1.2237  | 1.3256  | 1.4276  | 1.5296  | 1.6315  | 1.7335  | 1.8355  | 1.9375  | 10   |
| 20   | 2.0394  | 2.1414  | 2.2434  | 2.3453  | 2.4473  | 2.5493  | 2.6513  | 2.7532  | 2.8552  | 2.9572  | 20   |
| 30   | 3.0591  | 3.1611  | 3.2631  | 3.3651  | 3.4670  | 3.5690  | 3.6710  | 3.7729  | 3.8749  | 3.9769  | 30   |
| 40   | 4.0789  | 4.1808  | 4.2828  | 4.3848  | 4.4868  | 4.5887  | 4.6907  | 4.7927  | 4.8946  | 4.9966  | 40   |
| 50   | 5.0986  | 5.2006  | 5.3025  | 5.4045  | 5.5065  | 5.6084  | 5.7104  | 5.8124  | 5.9144  | 6.0163  | 50   |
| 60   | 6.1183  | 6.2203  | 6.3222  | 6.4242  | 6.5262  | 6.6282  | 6.7301  | 6.8321  | 6.9341  | 7.0360  | 60   |
| 70   | 7.1380  | 7.2400  | 7.3420  | 7.4439  | 7.5459  | 7.6479  | 7.7498  | 7.8518  | 7.9538  | 8.0558  | 70   |
| 80   | 8.1577  | 8.2597  | 8.3617  | 8.4636  | 8.5656  | 8.6676  | 8.7696  | 8.8715  | 8.9735  | 9.0755  | 80   |
| 90   | 9.1774  | 9.2794  | 9.3814  | 9.4834  | 9.5853  | 9.6873  | 9.7893  | 9.8912  | 9.9932  | 10.0952 | 90   |
| 100  | 10.1972 | 10.2991 | 10.4011 | 10.5031 | 10.6050 | 10.7070 | 10.8090 | 10.9110 | 11.0129 | 11.1149 | 100  |

INTRODUCTION

**Pressure**

**Weight pounds/square inch to weight kilograms/square centimeter**

| lbf/in <sup>2</sup> | 0                   | 1                   | 2                   | 3                   | 4                   | 5                   | 6                   | 7                   | 8                   | 9                   | lbf/in <sup>2</sup> |
|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| (psi)               | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | (psi)               |
| ----                |                     | 0.0703              | 0.1406              | 0.2109              | 0.2812              | 0.3515              | 0.4218              | 0.4921              | 0.5624              | 0.6327              | ----                |
| 10                  | 0.7030              | 0.7733              | 0.8436              | 0.9139              | 0.9842              | 1.0545              | 1.1248              | 1.1951              | 1.2654              | 1.3357              | 10                  |
| 20                  | 1.4060              | 1.4763              | 1.5466              | 1.6169              | 1.6872              | 1.7575              | 1.8278              | 1.8981              | 1.9684              | 2.0387              | 20                  |
| 30                  | 2.1090              | 2.1793              | 2.2496              | 2.3199              | 2.3902              | 2.4605              | 2.5308              | 2.6011              | 2.6714              | 2.7417              | 30                  |
| 40                  | 2.8120              | 2.8823              | 2.9526              | 3.0229              | 3.0932              | 3.1635              | 3.2338              | 3.3041              | 3.3744              | 3.4447              | 40                  |
| 50                  | 3.5150              | 3.5853              | 3.6556              | 3.7259              | 3.7962              | 3.8665              | 3.9368              | 4.0071              | 4.0774              | 4.1477              | 50                  |
| 60                  | 4.2180              | 4.2883              | 4.3586              | 4.4289              | 4.4992              | 4.5695              | 4.6397              | 4.7100              | 4.7803              | 4.8506              | 60                  |
| 70                  | 4.9209              | 4.9912              | 5.0615              | 5.1318              | 5.2021              | 5.2724              | 5.3427              | 5.4130              | 5.4833              | 5.5536              | 70                  |
| 80                  | 5.6239              | 5.6942              | 5.7645              | 5.8348              | 5.9051              | 5.9754              | 6.0457              | 6.1160              | 6.1863              | 6.2566              | 80                  |
| 90                  | 6.3269              | 6.3972              | 6.4675              | 6.5378              | 6.6081              | 6.6784              | 6.7487              | 6.8190              | 6.8893              | 6.9596              | 90                  |
| 100                 | 7.0299              | 7.1002              | 7.1705              | 7.2408              | 7.3111              | 7.3814              | 7.4517              | 7.5220              | 7.5923              | 7.6626              | 100                 |

**Weight kilograms/square centimeter to weight pounds/square inch**

| kgf/cm <sup>2</sup> | 0                         | 1                         | 2                         | 3                         | 4                         | 5                         | 6                         | 7                         | 8                         | 9                         | kgf/cm <sup>2</sup> |
|---------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------|
|                     | lbf/in <sup>2</sup> (psi) | lbf/in <sup>2</sup> (psi) | lbf/in <sup>2</sup> (psi) | lbf/in <sup>2</sup> (psi) | lbf/in <sup>2</sup> (psi) | lbf/in <sup>2</sup> (psi) | lbf/in <sup>2</sup> (psi) | lbf/in <sup>2</sup> (psi) | lbf/in <sup>2</sup> (psi) | lbf/in <sup>2</sup> (psi) |                     |
| ----                |                           | 14.22                     | 28.45                     | 42.67                     | 56.90                     | 71.12                     | 85.35                     | 99.57                     | 113.80                    | 128.02                    | ----                |
| 10                  | 142.25                    | 156.47                    | 170.70                    | 184.92                    | 199.15                    | 213.37                    | 227.60                    | 241.82                    | 256.05                    | 270.27                    | 10                  |
| 20                  | 284.50                    | 298.72                    | 312.95                    | 327.17                    | 341.40                    | 355.62                    | 369.85                    | 384.07                    | 398.30                    | 412.52                    | 20                  |
| 30                  | 426.75                    | 440.97                    | 455.20                    | 469.42                    | 483.65                    | 497.87                    | 512.10                    | 526.32                    | 540.55                    | 554.77                    | 30                  |
| 40                  | 569.00                    | 583.22                    | 597.45                    | 611.67                    | 625.90                    | 640.12                    | 654.35                    | 668.57                    | 682.80                    | 697.02                    | 40                  |
| 50                  | 711.25                    | 725.47                    | 739.70                    | 753.92                    | 768.14                    | 782.37                    | 796.59                    | 810.82                    | 825.04                    | 839.27                    | 50                  |
| 60                  | 853.49                    | 867.72                    | 881.94                    | 896.17                    | 910.39                    | 924.62                    | 938.84                    | 953.07                    | 967.29                    | 981.52                    | 60                  |
| 70                  | 995.74                    | 1009.97                   | 1024.19                   | 1038.42                   | 1052.64                   | 1066.87                   | 1081.09                   | 1095.32                   | 1109.54                   | 1123.77                   | 70                  |
| 80                  | 1137.99                   | 1152.22                   | 1166.44                   | 1180.67                   | 1194.89                   | 1209.12                   | 1223.34                   | 1237.57                   | 1251.79                   | 1266.02                   | 80                  |
| 90                  | 1280.24                   | 1294.47                   | 1308.69                   | 1322.92                   | 1337.14                   | 1351.37                   | 1365.59                   | 1379.82                   | 1394.04                   | 1408.27                   | 90                  |
| 100                 | 1422.49                   | 1436.72                   | 1450.94                   | 1465.17                   | 1479.39                   | 1493.62                   | 1507.84                   | 1522.06                   | 1536.29                   | 1550.51                   | 100                 |

**Weight kilograms/square centimeter to kilopascals**

| kgf/cm <sup>2</sup> | 0      | 1      | 2       | 3       | 4       | 5      | 6       | 7       | 8       | 9       | kgf/cm <sup>2</sup> |
|---------------------|--------|--------|---------|---------|---------|--------|---------|---------|---------|---------|---------------------|
|                     | kpa    | kpa    | kpa     | kpa     | kpa     | kpa    | kpa     | kpa     | kpa     | kpa     |                     |
| ----                |        | 98.1   | 196.1   | 294.2   | 392.3   | 490.3  | 588.4   | 686.5   | 784.5   | 882.6   | ----                |
| 10                  | 980.7  | 1078.7 | 1176.8  | 1274.9  | 1372.9  | 1471.0 | 1569.1  | 1667.1  | 1765.2  | 1863.3  | 10                  |
| 20                  | 1961.3 | 2059.4 | 2157.5  | 2255.5  | 2353.6  | 2451.7 | 2549.7  | 2647.8  | 2745.9  | 2843.9  | 20                  |
| 30                  | 2942.0 | 3040.1 | 3138.1  | 3236.2  | 3334.3  | 3432.3 | 3530.4  | 3628.5  | 3726.5  | 3824.6  | 30                  |
| 40                  | 3922.7 | 4020.7 | 4118.8  | 4216.9  | 4314.9  | 4413.0 | 4511.1  | 4609.1  | 4707.2  | 4805.3  | 40                  |
| 50                  | 4903.3 | 5001.4 | 5099.5  | 5197.5  | 5295.6  | 5393.7 | 5491.7  | 5589.8  | 5687.9  | 5785.9  | 50                  |
| 60                  | 5884.0 | 5982.1 | 6080.1  | 6178.2  | 6276.3  | 6374.3 | 6472.4  | 6570.5  | 6668.5  | 6766.6  | 60                  |
| 70                  | 6864.7 | 6962.7 | 7060.8  | 7158.9  | 7256.9  | 7355.0 | 7453.1  | 7551.1  | 7649.2  | 7747.3  | 70                  |
| 80                  | 7845.3 | 7943.4 | 8041.5  | 8139.5  | 8237.6  | 8335.7 | 8433.7  | 8531.8  | 8629.9  | 8727.9  | 80                  |
| 90                  | 8826.0 | 8924.1 | 9022.1  | 9120.2  | 9218.3  | 9316.3 | 9414.4  | 9512.5  | 9610.5  | 9708.6  | 90                  |
| 100                 | 9806.7 | 9904.7 | 10002.8 | 10100.8 | 10198.9 | 10297  | 10395.0 | 10493.1 | 10591.2 | 10689.2 | 100                 |

INTRODUCTION

**Kilopascals to weight kilograms/square centimeter**

| kpa   | 0                   | 100                 | 200                 | 300                 | 400                 | 500                 | 600                 | 700                 | 800                 | 900                 | kpa   |
|-------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|-------|
|       | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> | kgf/cm <sup>2</sup> |       |
| ----  |                     | 1.020               | 2.039               | 3.059               | 4.079               | 5.099               | 6.118               | 7.138               | 8.158               | 9.177               | ----  |
| 1000  | 10.197              | 11.217              | 12.237              | 13.256              | 14.276              | 15.296              | 16.315              | 17.335              | 18.355              | 19.375              | 1000  |
| 2000  | 20.394              | 21.414              | 22.434              | 23.453              | 24.473              | 25.493              | 26.513              | 27.532              | 28.552              | 29.572              | 2000  |
| 3000  | 30.591              | 31.611              | 32.631              | 33.651              | 34.670              | 35.690              | 36.710              | 37.729              | 38.749              | 39.769              | 3000  |
| 4000  | 40.789              | 41.808              | 42.828              | 43.848              | 44.868              | 45.887              | 46.907              | 47.927              | 48.946              | 49.966              | 4000  |
| 5000  | 50.986              | 52.006              | 53.025              | 54.045              | 55.065              | 56.084              | 57.104              | 58.124              | 59.144              | 60.163              | 5000  |
| 6000  | 61.183              | 62.203              | 63.222              | 64.242              | 65.262              | 66.282              | 67.301              | 68.321              | 69.341              | 70.360              | 6000  |
| 7000  | 71.380              | 72.400              | 73.420              | 74.439              | 75.459              | 76.479              | 77.498              | 78.518              | 79.538              | 80.558              | 7000  |
| 8000  | 81.577              | 82.597              | 83.617              | 84.636              | 85.656              | 86.676              | 87.696              | 88.715              | 89.735              | 90.755              | 8000  |
| 9000  | 91.774              | 92.794              | 93.814              | 94.834              | 95.853              | 96.873              | 97.893              | 98.912              | 99.932              | 100.952             | 9000  |
| 10000 | 101.972             | 102.991             | 104.011             | 105.031             | 106.050             | 107.070             | 108.090             | 109.110             | 110.129             | 111.149             | 10000 |

**Torque**

**Feet weight pounds to weight kilogram meters**

| lbf.ft | 0      | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | lbf.ft |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|        | kgf-m  | kgf-m  | kgf-m  | kgf-m  | kgf-m  | kgf-m  | kgf-m  | kgf-m  | kgf-m  | kgf-m  |        |
| ----   |        | 0.138  | 0.277  | 0.415  | 0.553  | 0.692  | 0.830  | 0.969  | 1.107  | 1.245  | ----   |
| 10     | 1.384  | 1.522  | 1.660  | 1.799  | 1.937  | 2.075  | 2.214  | 2.352  | 2.490  | 2.629  | 10     |
| 20     | 2.767  | 2.906  | 3.044  | 3.182  | 3.321  | 3.459  | 3.597  | 3.736  | 3.874  | 4.012  | 20     |
| 30     | 4.151  | 4.289  | 4.428  | 4.566  | 4.704  | 4.843  | 4.981  | 5.119  | 5.258  | 5.396  | 30     |
| 40     | 5.534  | 5.673  | 5.811  | 5.949  | 6.088  | 6.226  | 6.365  | 6.503  | 6.641  | 6.780  | 40     |
| 50     | 6.918  | 7.056  | 7.195  | 7.333  | 7.471  | 7.610  | 7.748  | 7.887  | 8.025  | 8.163  | 50     |
| 60     | 8.302  | 8.440  | 8.578  | 8.717  | 8.855  | 8.993  | 9.132  | 9.270  | 9.409  | 9.547  | 60     |
| 70     | 9.685  | 9.824  | 9.962  | 10.100 | 10.239 | 10.377 | 10.515 | 10.654 | 10.792 | 10.930 | 70     |
| 80     | 11.069 | 11.207 | 11.346 | 11.484 | 11.622 | 11.761 | 11.899 | 12.037 | 12.176 | 12.314 | 80     |
| 90     | 12.452 | 12.591 | 12.729 | 12.868 | 13.006 | 13.144 | 13.283 | 13.421 | 13.559 | 13.698 | 90     |
| 100    | 13.836 | 13.974 | 14.113 | 14.251 | 14.389 | 14.528 | 14.666 | 14.805 | 14.943 | 15.081 | 100    |

**Weight kilogram meters to feet weight pounds**

| kgf-m | 0       | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | kgf-m |
|-------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
|       | lbf.ft  | lbf.ft  | lbf.ft  | lbf.ft  | lbf.ft  | lbf.ft  | lbf.ft  | lbf.ft  | lbf.ft  | lbf.ft  |       |
| ----  |         | 7.228   | 14.455  | 21.683  | 28.910  | 36.138  | 43.365  | 50.593  | 57.820  | 65.048  | ----  |
| 10    | 72.275  | 79.503  | 86.730  | 93.958  | 101.185 | 108.413 | 115.640 | 122.868 | 130.095 | 137.323 | 10    |
| 20    | 144.550 | 151.778 | 159.005 | 166.233 | 173.460 | 180.688 | 187.915 | 195.143 | 202.370 | 209.598 | 20    |
| 30    | 216.825 | 224.053 | 231.280 | 238.508 | 245.735 | 252.963 | 260.190 | 267.418 | 274.645 | 281.873 | 30    |
| 40    | 289.100 | 296.328 | 303.555 | 310.783 | 318.010 | 325.238 | 332.465 | 339.693 | 346.920 | 354.148 | 40    |
| 50    | 361.375 | 368.603 | 375.830 | 383.058 | 390.285 | 397.513 | 404.740 | 411.968 | 419.195 | 426.423 | 50    |
| 60    | 433.650 | 440.878 | 448.105 | 455.333 | 462.560 | 469.788 | 477.015 | 484.243 | 491.470 | 498.698 | 60    |
| 70    | 505.925 | 513.153 | 520.380 | 527.608 | 534.835 | 542.063 | 549.290 | 556.518 | 563.745 | 570.973 | 70    |
| 80    | 578.200 | 585.428 | 592.655 | 599.883 | 607.110 | 614.338 | 621.565 | 628.793 | 636.020 | 643.248 | 80    |
| 90    | 650.475 | 657.703 | 664.930 | 672.158 | 679.385 | 686.613 | 693.840 | 701.068 | 708.295 | 715.523 | 90    |
| 100   | 722.750 | 729.978 | 737.205 | 744.433 | 751.660 | 758.888 | 766.115 | 773.343 | 780.570 | 787.798 | 100   |



INTRODUCTION

**Weight kilogram meters to Newton meters**

| kgf·m | 0      | 1      | 2       | 3       | 4       | 5       | 6      | 7       | 8       | 9       | kgf·m |
|-------|--------|--------|---------|---------|---------|---------|--------|---------|---------|---------|-------|
|       | N·m    | N·m    | N·m     | N·m     | N·m     | N·m     | N·m    | N·m     | N·m     | N·m     |       |
| ----  |        | 9.81   | 19.61   | 29.42   | 39.23   | 49.03   | 58.84  | 68.65   | 78.45   | 88.26   | ----  |
| 10    | 98.07  | 107.87 | 117.68  | 127.49  | 137.29  | 147.10  | 156.91 | 166.71  | 176.52  | 186.33  | 10    |
| 20    | 196.13 | 205.94 | 215.75  | 225.55  | 235.36  | 245.17  | 254.97 | 264.78  | 274.59  | 284.39  | 20    |
| 30    | 294.20 | 304.01 | 313.81  | 323.62  | 333.43  | 343.23  | 353.04 | 362.85  | 372.65  | 382.46  | 30    |
| 40    | 392.27 | 402.07 | 411.88  | 421.69  | 431.49  | 441.30  | 451.11 | 460.91  | 470.72  | 480.53  | 40    |
| 50    | 490.33 | 500.14 | 509.95  | 519.75  | 529.56  | 539.37  | 549.17 | 558.98  | 568.79  | 578.59  | 50    |
| 60    | 588.40 | 598.21 | 608.01  | 617.82  | 627.63  | 637.43  | 647.24 | 657.05  | 666.85  | 676.66  | 60    |
| 70    | 686.47 | 696.27 | 706.08  | 715.89  | 725.69  | 735.50  | 745.31 | 755.11  | 764.92  | 774.73  | 70    |
| 80    | 784.53 | 794.34 | 804.15  | 813.95  | 823.76  | 833.57  | 843.37 | 853.18  | 862.99  | 872.79  | 80    |
| 90    | 882.60 | 892.41 | 902.21  | 912.02  | 921.83  | 931.63  | 941.44 | 951.25  | 961.05  | 970.86  | 90    |
| 100   | 980.67 | 990.47 | 1000.28 | 1010.08 | 1019.89 | 1029.70 | 1039.5 | 1049.31 | 1059.12 | 1068.92 | 100   |

**Newton meters to weight kilogram meters**

| N·m  | 0       | 10      | 20      | 30      | 40      | 50      | 60      | 70      | 80      | 90      | N·m  |
|------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------|
|      | kgf·m   | kgf·m   | kgf·m   | kgf·m   | kgf·m   | kgf·m   | kgf·m   | kgf·m   | kgf·m   | kgf·m   |      |
| ---- |         | 1.020   | 2.039   | 3.059   | 4.079   | 5.099   | 6.118   | 7.138   | 8.158   | 9.177   | ---- |
| 100  | 10.197  | 11.217  | 12.237  | 13.256  | 14.276  | 15.296  | 16.315  | 17.335  | 18.355  | 19.375  | 10   |
| 200  | 20.394  | 21.414  | 22.434  | 23.453  | 24.473  | 25.493  | 26.513  | 27.532  | 28.552  | 29.572  | 20   |
| 300  | 30.591  | 31.611  | 32.631  | 33.651  | 34.670  | 35.690  | 36.710  | 37.729  | 38.749  | 39.769  | 30   |
| 400  | 40.789  | 41.808  | 42.828  | 43.848  | 44.868  | 45.887  | 46.907  | 47.927  | 48.946  | 49.966  | 40   |
| 500  | 50.986  | 52.006  | 53.025  | 54.045  | 55.065  | 56.084  | 57.104  | 58.124  | 59.144  | 60.163  | 50   |
| 600  | 61.183  | 62.203  | 63.222  | 64.242  | 65.262  | 66.282  | 67.301  | 68.321  | 69.341  | 70.360  | 60   |
| 700  | 71.380  | 72.400  | 73.420  | 74.439  | 75.459  | 76.479  | 77.498  | 78.518  | 79.538  | 80.558  | 70   |
| 800  | 81.577  | 82.597  | 83.617  | 84.636  | 85.656  | 86.676  | 87.696  | 88.715  | 89.735  | 90.755  | 80   |
| 900  | 91.774  | 92.794  | 93.814  | 94.834  | 95.853  | 96.873  | 97.893  | 98.912  | 99.932  | 100.952 | 90   |
| 1000 | 101.972 | 102.991 | 104.011 | 105.031 | 106.050 | 107.070 | 108.090 | 109.110 | 110.129 | 111.149 | 100  |

---

**Temperature**
**Fahrenheit to centigrade**

| °F  | °C    | °F | °C    | °F  | °C   | °F  | °C   | °F  | °C    | °F  | °C    | °F  | °C    | °F  | °C    |
|-----|-------|----|-------|-----|------|-----|------|-----|-------|-----|-------|-----|-------|-----|-------|
| -60 | -51.1 | 2  | -18.9 | 56  | 13.3 | 114 | 45.6 | 172 | 77.8  | 230 | 110   | 288 | 142.2 | 346 | 174.4 |
| -58 | -50   | 0  | -17.8 | 58  | 14.4 | 116 | 46.7 | 174 | 78.9  | 232 | 111.1 | 290 | 143.3 | 348 | 175.6 |
| -56 | -48.9 | 2  | -16.7 | 60  | 15.6 | 118 | 47.8 | 176 | 80.0  | 234 | 112.2 | 292 | 144.4 | 350 | 176.7 |
| -54 | -47.8 | 4  | -15.6 | 62  | 16.7 | 120 | 48.9 | 178 | 81.1  | 236 | 113.3 | 294 | 145.6 | 352 | 177.8 |
| -52 | -46.7 | 6  | -14.4 | 64  | 17.8 | 122 | 50.0 | 180 | 82.2  | 238 | 114.4 | 296 | 146.7 | 354 | 178.9 |
| -50 | -45.6 | 8  | -13.3 | 66  | 18.9 | 124 | 51.1 | 182 | 83.3  | 240 | 115.6 | 298 | 147.8 | 356 | 180   |
| -48 | -44.4 | 10 | -12.2 | 68  | 20   | 126 | 52.2 | 184 | 84.4  | 242 | 116.7 | 300 | 148.9 | 358 | 181.1 |
| -46 | -43.3 | 12 | -11.1 | 70  | 21.1 | 128 | 53.3 | 186 | 85.6  | 244 | 117.8 | 302 | 150   | 360 | 182.2 |
| -44 | -42.2 | 14 | -10   | 72  | 22.2 | 130 | 54.4 | 188 | 86.7  | 246 | 118.9 | 304 | 151.1 | 362 | 183.3 |
| -42 | -41.1 | 16 | -8.9  | 74  | 23.3 | 132 | 55.6 | 190 | 87.8  | 248 | 120   | 306 | 152.2 | 364 | 184.4 |
| -40 | -40.0 | 18 | -7.8  | 76  | 24.4 | 134 | 56.7 | 192 | 88.9  | 250 | 121.1 | 308 | 153.3 | 366 | 185.6 |
| -38 | -38.9 | 20 | -6.7  | 78  | 25.6 | 136 | 57.8 | 194 | 90.0  | 252 | 122.2 | 310 | 154.4 | 368 | 186.7 |
| -36 | -37.8 | 22 | -5.6  | 80  | 26.7 | 138 | 58.9 | 196 | 91.1  | 254 | 123.3 | 312 | 155.6 | 370 | 187.8 |
| -34 | -36.7 | 24 | -4.4  | 82  | 27.8 | 140 | 60   | 198 | 92.2  | 256 | 124.4 | 314 | 156.7 | 372 | 188.9 |
| -32 | -35.6 | 26 | -3.3  | 84  | 28.9 | 142 | 61.1 | 200 | 93.3  | 258 | 125.6 | 316 | 157.8 | 374 | 190.0 |
| -30 | -34.4 | 28 | -2.2  | 86  | 30.0 | 144 | 62.2 | 202 | 94.4  | 260 | 126.7 | 318 | 158.9 | 376 | 191.1 |
| -28 | -33.3 | 30 | -1.1  | 88  | 31.1 | 146 | 63.3 | 204 | 95.6  | 262 | 127.8 | 320 | 160   | 378 | 192.2 |
| -26 | -32.2 | 32 | 0.0   | 90  | 32.2 | 148 | 64.4 | 206 | 96.7  | 264 | 128.9 | 322 | 161.1 | 380 | 193.3 |
| -24 | -31.1 | 34 | 1.1   | 92  | 33.3 | 150 | 65.6 | 208 | 97.8  | 266 | 130.0 | 324 | 162.2 | 382 | 194.4 |
| -22 | -30.0 | 36 | 2.2   | 94  | 34.4 | 152 | 66.7 | 210 | 98.9  | 268 | 131.1 | 326 | 163.3 | 384 | 195.6 |
| -20 | -28.9 | 38 | 3.3   | 96  | 35.6 | 154 | 67.8 | 212 | 100.0 | 270 | 132.2 | 328 | 164.4 | 386 | 196.7 |
| -18 | -27.8 | 40 | 4.4   | 98  | 36.7 | 156 | 68.9 | 214 | 101.1 | 272 | 133.3 | 330 | 165.6 | 388 | 197.8 |
| -16 | -26.7 | 42 | 5.6   | 100 | 37.8 | 158 | 70.0 | 216 | 102.2 | 274 | 134.4 | 332 | 166.7 | 390 | 198.9 |
| -14 | -25.6 | 44 | 6.7   | 102 | 38.9 | 160 | 71.1 | 218 | 103.3 | 276 | 135.6 | 334 | 167.8 | 392 | 200   |
| -12 | -24.4 | 46 | 7.8   | 104 | 40.0 | 162 | 72.2 | 220 | 104.4 | 278 | 136.7 | 336 | 168.9 | 400 | 204.4 |
| -10 | -23.3 | 48 | 8.9   | 106 | 41.1 | 164 | 73.3 | 222 | 105.6 | 280 | 137.8 | 338 | 170.0 | 410 | 210.0 |
| -8  | -22.2 | 50 | 10.0  | 108 | 42.2 | 166 | 74.4 | 224 | 106.7 | 282 | 138.9 | 340 | 171.1 | 420 | 215.6 |
| -6  | -21.1 | 52 | 11.1  | 110 | 43.3 | 168 | 75.6 | 226 | 107.8 | 284 | 140.0 | 342 | 172.2 | 430 | 221.1 |
| -4  | -20.0 | 54 | 12.2  | 112 | 44.4 | 170 | 76.7 | 228 | 108.9 | 286 | 141.1 | 344 | 173.3 | 440 | 226.7 |

INTRODUCTION

Centigrade to fahrenheit

| °C  | °F    | °C  | °F   | °C | °F    | °C | °F    | °C  | °F    | °C  | °F    | °C  | °F    | °C  | °F    |
|-----|-------|-----|------|----|-------|----|-------|-----|-------|-----|-------|-----|-------|-----|-------|
| -50 | -58.0 | -18 | -0.4 | 14 | 57.2  | 46 | 114.8 | 78  | 172.4 | 110 | 230.0 | 142 | 287.6 | 174 | 345.2 |
| -49 | -56.2 | -17 | 1.4  | 15 | 59.0  | 47 | 116.6 | 79  | 174.2 | 111 | 231.8 | 143 | 289.4 | 175 | 347.0 |
| -48 | -54.4 | -16 | 3.2  | 16 | 60.8  | 48 | 118.4 | 80  | 176.0 | 112 | 233.6 | 144 | 291.2 | 176 | 348.8 |
| -47 | -52.6 | -15 | 5.0  | 17 | 62.6  | 49 | 120.2 | 81  | 177.8 | 113 | 235.4 | 145 | 293.0 | 177 | 350.6 |
| -46 | -50.8 | -14 | 6.8  | 18 | 64.4  | 50 | 122.0 | 82  | 179.6 | 114 | 237.2 | 146 | 294.8 | 178 | 352.4 |
| -45 | -49.0 | -13 | 8.6  | 19 | 66.2  | 51 | 123.8 | 83  | 181.4 | 115 | 239.0 | 147 | 296.6 | 179 | 354.2 |
| -44 | -47.2 | -12 | 10.4 | 20 | 68.0  | 52 | 125.6 | 84  | 183.2 | 116 | 240.8 | 148 | 298.4 | 180 | 356.0 |
| -43 | -45.4 | -11 | 12.2 | 21 | 69.8  | 53 | 127.4 | 85  | 185.0 | 117 | 242.6 | 149 | 300.2 | 181 | 357.8 |
| -42 | -43.6 | -10 | 14.0 | 22 | 71.6  | 54 | 129.2 | 86  | 186.8 | 118 | 244.4 | 150 | 302.0 | 182 | 359.6 |
| -41 | -41.8 | -9  | 15.8 | 23 | 73.4  | 55 | 131.0 | 87  | 188.6 | 119 | 246.2 | 151 | 303.8 | 183 | 361.4 |
| -40 | -40.0 | -8  | 17.6 | 24 | 75.2  | 56 | 132.8 | 88  | 190.4 | 120 | 248.0 | 152 | 305.6 | 184 | 363.2 |
| -39 | -38.2 | -7  | 19.4 | 25 | 77.0  | 57 | 134.6 | 89  | 192.2 | 121 | 249.8 | 153 | 307.4 | 185 | 365.0 |
| -38 | -36.4 | -6  | 21.2 | 26 | 78.8  | 58 | 136.4 | 90  | 194.0 | 122 | 251.6 | 154 | 309.2 | 186 | 366.8 |
| -37 | -34.6 | -5  | 23.0 | 27 | 80.6  | 59 | 138.2 | 91  | 195.8 | 123 | 253.4 | 155 | 311.0 | 187 | 368.6 |
| -36 | -32.8 | -4  | 24.8 | 28 | 82.4  | 60 | 140.0 | 92  | 197.6 | 124 | 255.2 | 156 | 312.8 | 188 | 370.4 |
| -35 | -31.0 | -3  | 26.6 | 29 | 84.2  | 61 | 141.8 | 93  | 199.4 | 125 | 257.0 | 157 | 314.6 | 189 | 372.2 |
| -34 | -29.2 | -2  | 28.4 | 30 | 86.0  | 62 | 143.6 | 94  | 201.2 | 126 | 258.8 | 158 | 316.4 | 190 | 374.0 |
| -33 | -27.4 | -1  | 30.2 | 31 | 87.8  | 63 | 145.4 | 95  | 203.0 | 127 | 260.6 | 159 | 318.2 | 191 | 375.8 |
| -32 | -25.6 | 0   | 32.0 | 32 | 89.6  | 64 | 147.2 | 96  | 204.8 | 128 | 262.4 | 160 | 320.0 | 192 | 377.6 |
| -31 | -23.8 | 1   | 33.8 | 33 | 91.4  | 65 | 149.0 | 97  | 206.6 | 129 | 264.2 | 161 | 321.8 | 193 | 379.4 |
| -30 | -22.0 | 2   | 35.6 | 34 | 93.2  | 66 | 150.8 | 98  | 208.4 | 130 | 266.0 | 162 | 323.6 | 194 | 381.2 |
| -29 | -20.2 | 3   | 37.4 | 35 | 95.0  | 67 | 152.6 | 99  | 210.2 | 131 | 267.8 | 163 | 325.4 | 195 | 383.0 |
| -28 | -18.4 | 4   | 39.2 | 36 | 96.8  | 68 | 154.4 | 100 | 212.0 | 132 | 269.6 | 164 | 327.2 | 196 | 384.8 |
| -27 | -16.6 | 5   | 41.0 | 37 | 98.6  | 69 | 156.2 | 101 | 213.8 | 133 | 271.4 | 165 | 329.0 | 197 | 386.6 |
| -26 | -14.8 | 6   | 42.8 | 38 | 100.4 | 70 | 158.0 | 102 | 215.6 | 134 | 273.2 | 166 | 330.8 | 198 | 388.4 |
| -25 | -13.0 | 7   | 44.6 | 39 | 102.2 | 71 | 159.8 | 103 | 217.4 | 135 | 275.0 | 167 | 332.6 | 199 | 390.2 |
| -24 | -11.2 | 8   | 46.4 | 40 | 104.0 | 72 | 161.6 | 104 | 219.2 | 136 | 276.8 | 168 | 334.4 | 200 | 392.0 |
| -23 | -9.4  | 9   | 48.2 | 41 | 105.8 | 73 | 163.4 | 105 | 221.0 | 137 | 278.6 | 169 | 336.2 | 210 | 410.0 |
| -22 | -8    | 10  | 50.0 | 42 | 107.6 | 74 | 165.2 | 106 | 222.8 | 138 | 280.4 | 170 | 338.0 | 220 | 428.0 |
| -21 | -6    | 11  | 51.8 | 43 | 109.4 | 75 | 167.0 | 107 | 224.6 | 139 | 282.2 | 171 | 339.8 | 230 | 446.0 |
| -20 | -4    | 12  | 53.6 | 44 | 111.2 | 76 | 168.8 | 108 | 226.4 | 140 | 284.0 | 172 | 341.6 | 240 | 464.0 |
| -19 | -2    | 13  | 55.4 | 45 | 113.0 | 77 | 170.6 | 109 | 228.2 | 141 | 285.8 | 173 | 343.4 | 250 | 482.0 |

---

## Consumables

Lubricants must have the correct properties for each application.

**NOTICE:** *The conditions of use for individual fluids and lubricants must be respected.*

### Hydraulic fluid

**CASE AKCELA HYDRAULIC EXCAVATOR FLUID** is specially designed for high pressure applications and for the CASE CONSTRUCTION hydraulic system. The type of fluid to be used depends on the ambient temperature.

Temperate climates:

**-20 °C (-4.0 °F) to 40 °C (104.0 °F).**

**CASE AKCELA HYDRAULIC EXCAVATOR FLUID**  
(MS1230. ISO VG 46. DIN 51524 PART 2 HV)

Hot climates:

**0 °C (32.0 °F) to 50 °C (122.0 °F).**

**CASE AKCELA HYDRAULIC EXCAVATOR FLUID "HOT CLIMATE"**  
(MS 1216. ISO VG 68. DIN 51524 PART 3 CATEGORY HVLP)

Consult your CASE CONSTRUCTION dealer when using the machine in a hot region.

Perform servicing on the hydraulic oil, engine oil, radiator, and coolant solution.

Cold climates:

**-25 °C (-13.0 °F) to 20 °C (68.0 °F).**

**CASE AKCELA HYDRAULIC EXCAVATOR FLUID "COLD CLIMATE"**  
(MS 1216. ISO VG 32. DIN 51524 PART 2)

When using the machine in a cold region, contact your CASE CONSTRUCTION dealer.

Use the appropriate engine oil, hydraulic oil and coolant solution.

Biodegradable fluid:

**-30 °C (-22.0 °F) to 40 °C (104.0 °F).**

This yellow-coloured fluid is miscible with standard fluid. If used to change standard fluid, it is advisable to drain the circuit completely before refilling with this fluid.

**CASE AKCELA HYDRAULIC EXCAVATOR FLUID BIO**  
(MS 1230. ISO VG 46. DIN 51524 PART 2 HV)

### Transmission component oil

Extreme pressure oil used for enclosed transmission components.

**CASE AKCELA GEAR 135 H EP 80W-90**  
(SAE 80W-90. API GL 5. MIL-L-2105 D. MS 1316. ZF TE-ML 05A)

### Grease


**CASE AKCELA 251H EP MULTI-PURPOSE GREASE** (NLGI 2)  
"Extreme Pressure" multipurpose grease with lithium soap and calcium.

### Engine oil

The **CASE AKCELA UNITEK NO. 1™ SBL CJ-4 SAE 10W-40** is recommended for your engine. This oil ensures correct lubrication of your engine in all working conditions.

If the **CASE AKCELA UNITEK NO. 1™ SBL CJ-4 SAE 10W-40** cannot be obtained, use the oil corresponding to **API CJ-4**.

**Oil Grade**

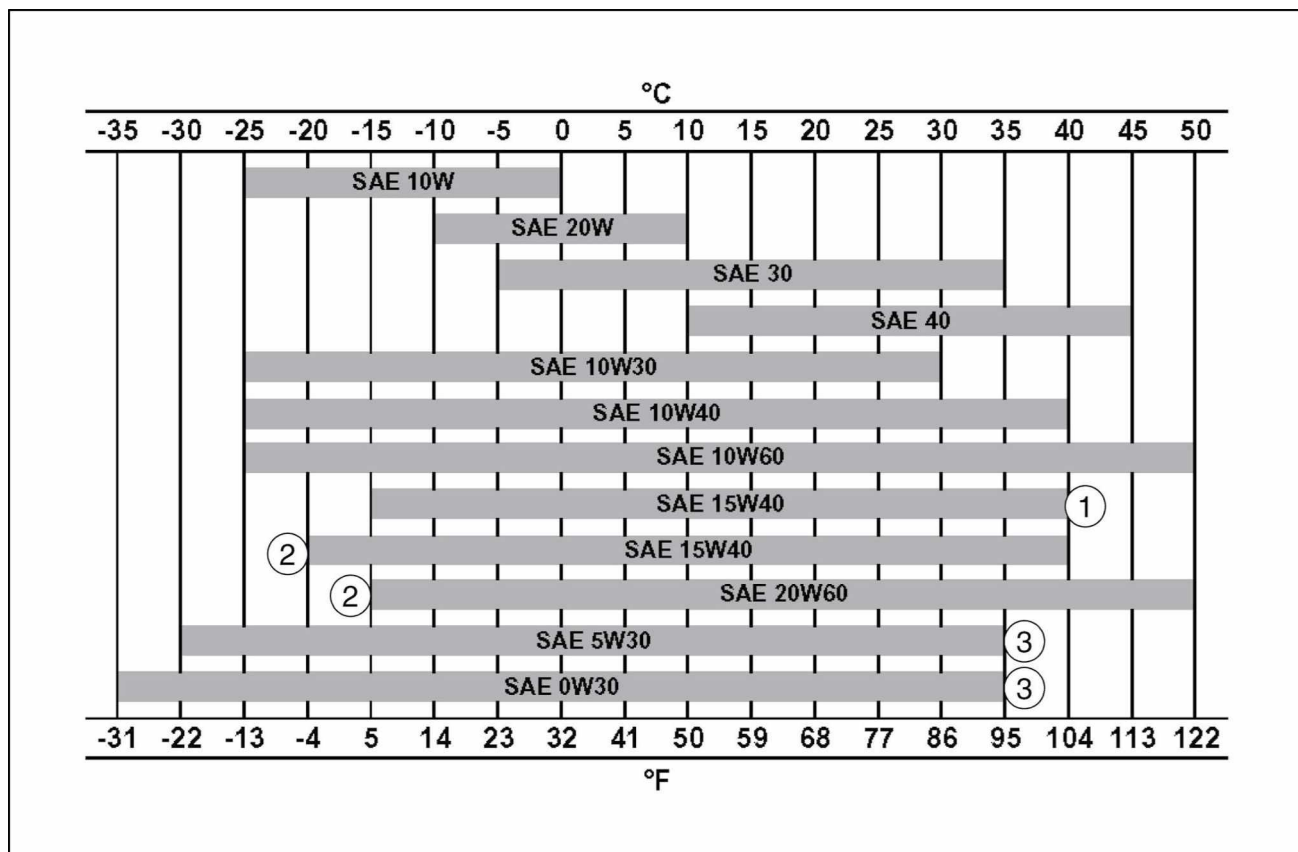

SMIL13CEX5633FA 1

- 1. Mineral oil
- 2. Semi-synthetic oil
- 3. Synthetic oil

**Fuel**

The fuel must conform to Interim Tier 4/Stage 3B Exhaust Gas Control Regulations.

Use grade number 2-D (S15) fuel.

Using other types of fuel may lead to stalled engine output or deterioration in fuel economy.

During cold weather [lower than **-7 °C (19.4 °F)**], it is temporarily acceptable to use a mixture of No. 1-D (S15) and No. 2-D (S15).

Consult the fuel supplier or the CASE CONSTRUCTION Dealer.

If the temperature drops below the fuel cloud point, output deficiency or engine start problems may occur due to wax crystals.

**Conditions applicable to diesel fuel**

The diesel fuel used must:

- Be free from dust particles, even minute ones.
- Have the proper viscosity.
- Have a high cetane number.
- Present great fluidity at low temperatures.
- Have low sulphur content.
- Have very little residual carbon.

---

## Recommended conditions that can be applied to diesel fuel

- JIS (Japanese Industrial Standards): No. 2
- DIN (German Institute for Standardization): **DIN 51601**
- **SAE** (Society of Automotive Engineers), corresponds to **SAE-J-313C**: No. 2-D (S15)
- BS (British Standards): Class A-1, corresponds to **BS 2869-1970**.
- EN 590 (max. sulfur 10 ppm)
- or fuels specified by the country in which these standards and this vehicle are used.

**NOTICE:** EPA regulation ultra low sulfur fuel only.

**NOTICE:** Using other fuels may cause serious problems, which will void the warranty.

Using non-recommended fuels may cause damage to the fuel injector pump and injector, as well as other fuel supply systems and the engine itself.

CASE CONSTRUCTION is not liable for any such damages.

Also, take note that the warranty does not cover such damages.

We recommend that you observe the following safety information in order to avoid damaging the engine fuel supply system.

- Some fuel suppliers mix old engine oil and diesel fuel.

Larger engine manufacturers allow for this kind of fuel to be used.

However, do not use diesel fuel that has been tainted with engine oil in your engine.

This kind of fuel will not only damage your engine, it may have a negative effect on the exhaust gas purification functions of the vehicle.

Confirm that the fuel conforms to the above specs with your fuel supplier before using diesel fuel in your vehicle.

**NOTICE:** Ask your fuel supplier or CASE CONSTRUCTION dealer regarding the proper use of fuel additives. Do not use fuel oil or gasoline, as it may damage your engine.

**NOTICE:** To avoid condensation in cold weather, make sure to fill up the fuel tank after the end of the workday.

## Anti-freeze/anti-corrosion

Use anti-freeze in all seasons to protect the cooling system from corrosion and all risk of freezing with a temperature until **-10 °C (14.0 °F)**.

### **CASE AKCELA PREMIUM ANTI-FREEZE**

**NOTICE:** Always mix the concentrate with **50 %** of water. Do not use the product concentrated.

**NOTICE:** Do not mix products of a different origin or brand. The same product must be used when topping up the system.

## Capacities

| Component             | Fluid/Lubricant type                            | Capacity                                     |
|-----------------------|---|--|
| Engine                | <b>CASE AKCELA NO. 1™ ENGINE OIL</b>            | <b>39 l (10.3 US gal)</b>                    |
| Cooling system        | <b>CASE AKCELA PREMIUM ANTI-FREEZE</b>          | <b>30.8 l (8.1 US gal)</b>                   |
| Fuel system           |   | Reservoir <b>450 l (118.9 US gal)</b>        |
| Hydraulic system      | <b>CASE AKCELA HYDRAULIC EXCAVATOR FLUID</b>    | Total system <b>300 l (79.3 US gal)</b>      |
|                       |   | Reservoir <b>147 l (38.8 US gal)</b>         |
| Travel reduction gear | <b>CASE AKCELA GEAR 135 EP</b>                  | Per reduction gear <b>9.1 l (2.4 US gal)</b> |
| Swing reduction gear  | <b>CASE AKCELA GEAR 135 EP</b>                  | <b>7.9 L (2.09 US gal)</b>                   |
|                       | <b>CASE AKCELA 251H EP MULTI-PURPOSE GREASE</b> | <b>0.8 kg (1.8 lb)</b>                       |
| Turntable teeth       | <b>CASE AKCELA 251H EP MULTI-PURPOSE GREASE</b> | <b>17 L (4.49 US gal)</b>                    |

## Abbreviation

| Abbreviation          | Explanation  |
|-----------------------|--|
| A/C                   | Air-conditioner  |
| A/D                   | Analog/digital   |
| ABDC                  | After bottom dead center   |
| AC                    | Alternating current  |
| ACC                   | Accessories  |
| ACG                   | Alternating current generator  |
| ACT                   | Actuator   |
| API                   | American Petroleum Institute   |
| ASM                   | Assembly   |
| ATDC                  | After top dead center  |
| ATF                   | Automatic transmission fluid   |
| Drilled hole B        | Notch hole bolt  |
| Eye B                 | Eyebolt  |
| Full threaded B       | Full threaded bolt   |
| Hexagon socket head B | Hexagon socket head bolt   |
| High-strength B       | High-strength bolt   |
| Reamer B              | Reamer bolt  |
| B+                    | Battery + terminal   |
| BAT                   | Battery  |
| BBDC                  | Before bottom dead center  |
| BKT                   | Bracket  |
| BRG                   | Bearing  |
| BTDC                  | Before top dead center   |
| C/B                   | Circuit breaker  |
| C/U                   | Control unit   |
| CAL                   | Calibration  |
| CAN                   | A type of control unit communication technique (controller area network) |
| CFG                   | Config   |
| CHK                   | Check  |
| CKP                   | Crankshaft position  |
| CMP                   | Camshaft position  |
| CO                    | Carbon monoxide  |
| CPU                   | Central processing device  |
| DC                    | Direct current   |
| DI                    | Direct injection   |
| DIAG                  | Diagnostic   |
| DLC                   | Data link connector  |
| DMM                   | Digital multi-meter  |
| DOC                   | Diesel oxidation catalyst  |
| DPD                   | Diesel particulate diffuser  |
| DTC                   | Diagnostic trouble code  |
| ECM / ECU             | Engine controller module / Engine control unit                           |
| ECT                   | Engine coolant temperature   |
| EEPROM                | Electrically erasable programmable read-only memory                      |
| EGR                   | Exhaust gas recirculation  |
| EMI                   | Electromagnetic interference   |
| EMPS                  | Engine module programming system   |
| ENG                   | Engine   |
| EPF                   | Engine protection feature  |
| EVRV                  | Electric vacuum regulating valve   |
| EXH                   | Exhaust gas  |
| F/B                   | Feedback   |
| F/C                   | Fuel cut   |
| F/L                   | Fusible link   |




## INTRODUCTION

| Abbreviation    | Explanation                                       |
|-----------------|---|
| FLW             | Fusible link wire                                 |
| FRT             | Front   |
| FT              | Fuel temperature                                  |
| FWD             | Forward   |
| GEN             | Generator   |
| GND             | Ground  |
| HBCV            | Hose burst check valve                            |
| HC              | Hydrocarbons                                      |
| HO2S            | Heated O2 sensor                                  |
| HR              | Time  |
| HRD             | High reach demolition machine                     |
| IAC             | Idle air control                                  |
| IAT             | Suction air temperature                           |
| IC              | Integrated circuit                                |
| ID Plate        | Nameplate, ID plate                               |
| IMT             | Intake manifold temperature                       |
| INL             | Suction air                                       |
| INJ             | Injection   |
| ISO             | International Organization for Standardization    |
| ISP             | Intake shutter position                           |
| ITP             | Intake throttle position                          |
| J/C             | Joint connector                                   |
| JIS             | Japanese Industrial Standards                     |
| KW              | A type of communication technique (keyword)       |
| LED             | Light-emitting diode                              |
| LH              | Left  |
| LLC             | Long-life coolant                                 |
| LM              | Lifting magnet                                    |
| M/V             | Magnet valve                                      |
| MAF             | Mass air flow                                     |
| MAP             | Manifold air pressure                             |
| Max             | Maximum   |
| MCM             | Machine control module                            |
| MIL             | Malfunction indicator lamp (diagnostic)           |
| milli-amp       | Current   |
| Min             | Minimum   |
| MPU             | Micro-processing unit                             |
| High-strength N | High-strength nut                                 |
| NC              | Normal closed                                     |
| NO              | Normal open                                       |
| NOx             | Nitrogen oxides                                   |
| N-TDC           | Number of top dead center                         |
| O2S             | O2 sensor   |
| OBD             | On-board diagnostics                              |
| OEM             | Original equipment manufacturer                   |
| OPT             | Options   |
| OT              | Oil temperature                                   |
| P/L             | Indicator lamp                                    |
| PCV             | Pump control valve/positive crankcase ventilation |
| P-I             | Proportional - integral                           |
| PM              | Particulate matter                                |
| PTO             | Power take-off                                    |
| PWM             | Pulse width modulation wave                       |
| QOS             | Quick on start system                             |
| QWS             | Quick warm up system                              |

## INTRODUCTION

| Abbreviation          | Explanation                                 |
|-----------------------|---|
| R/L                   | Relay                                       |
| RAM                   | Random access memory                        |
| REF                   | Reference                                   |
| RH                    | Right hand                                  |
| ROM                   | Read-only memory                            |
| RP                    | Rail pressure                               |
| Rr                    | Rear  |
| RWD                   | Rearward                                    |
| + Flush head S        | + Flush head Screw                          |
| + Phillips pan head S | + Phillips pan head Screw                   |
| + Screw tapping S     | + Screw tapping Screw                       |
| S/A                   | Subassembly                                 |
| SAE                   | Society of Automotive Engineers             |
| SBF                   | Slow blow fuse                              |
| SCV                   | Suction control valve                       |
| SIG                   | Signal                                      |
| SLD                   | Shield                                      |
| SP pin                | Special pin                                 |
| ST                    | Starter/start                               |
| STD                   | Standard                                    |
| SW                    | Switch                                      |
| TDC                   | Top dead center                             |
| TEMP                  | Temperature                                 |
| TP                    | Throttle position                           |
| UART                  | Universal asynchronous receiver-transmitter |
| VB                    | Battery voltage                             |
| VGS Turbo             | Variable geometry system turbo              |
| High-strength W       | High-strength washer                        |
| Outer-tooth W         | Outer-tooth washer                          |
| W/H                   | Wire, harness                               |
| W/L                   | Warning lamp                                |
| W/S                   | Welded splice                               |
| WOT                   | Wide open throttle                          |

## Product identification

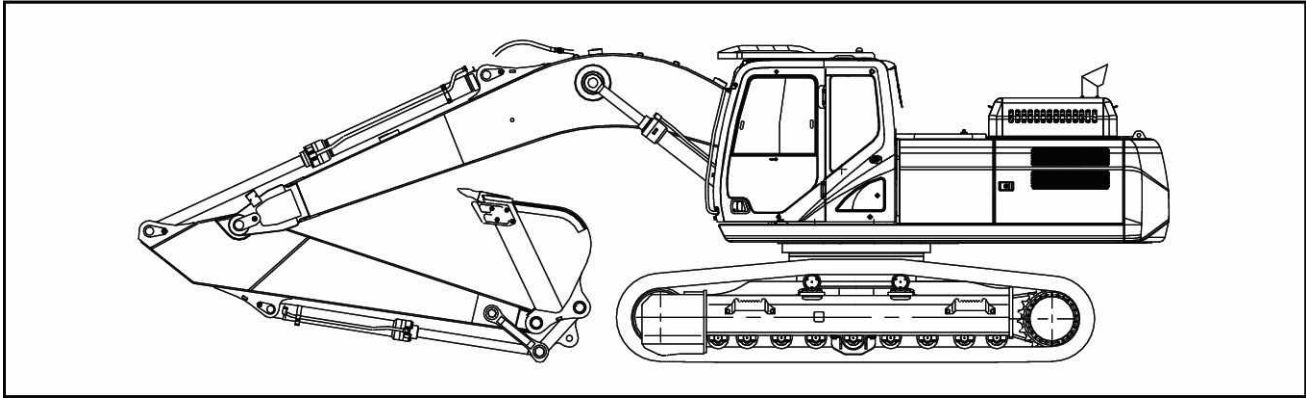


5F5209BB 1

When ordering parts, obtaining information or assistance, always supply your CASE CONSTRUCTION Dealer with the type and serial number of your machine or accessories. Write the following in the spaces below: the type, serial number and year of manufacture of your machine, accessories and the serial numbers of the various hydraulic and mechanical components.

### Machine

(1) Designation / Model:  
Hydraulic Excavator CX300C

(2) Product identification number ( PIN ):

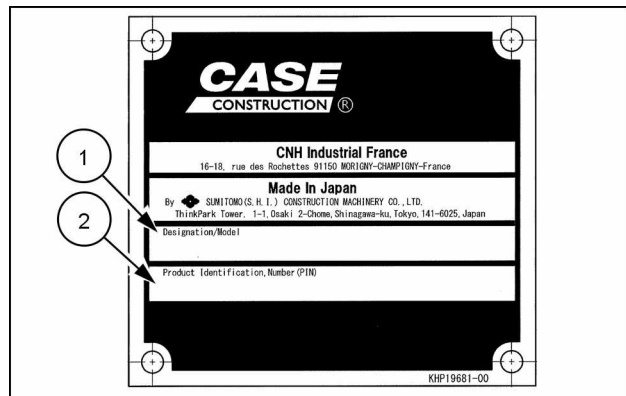


KHP19681-B 2

### Engine

Make and type: ISUZU AL - 6HK1X

Serial number:

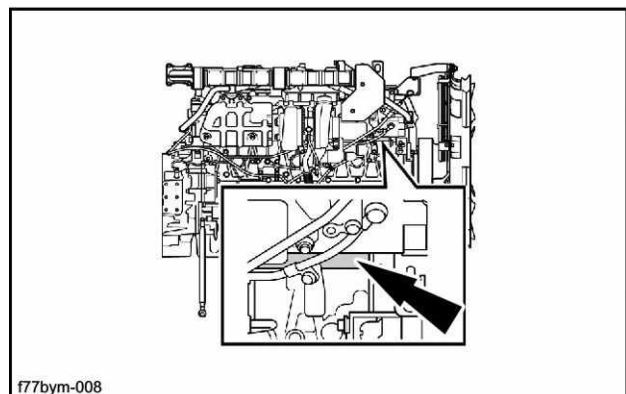

F77BYM-008 3

**ID Label**

It is attached to the cylinder head cover.




F77BYM-006 4

**Diesel Particulate Diffuser (DPD)**

(1) Catalyzed soot filter serial number:  
Filter which has the function to purify exhaust gas with an oxidation catalyst.

(2) Diesel oxidation catalyst serial number:  
Oxidation catalyst for diesel machine.

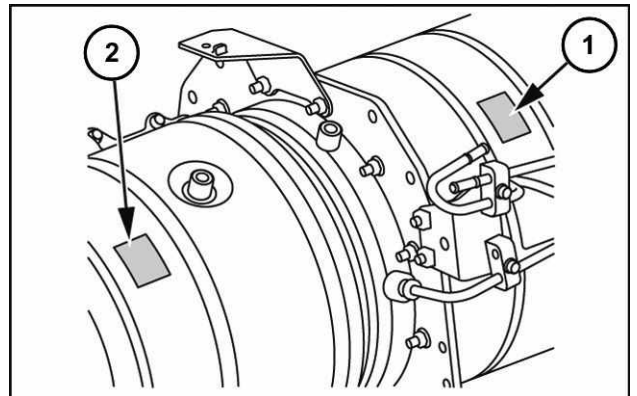


DPD00001A 5

**Cab protection (FOPS) (Falling Objects Protective Structure)**

Complies with ISO 10262 level 2 standard.

Product identification number:

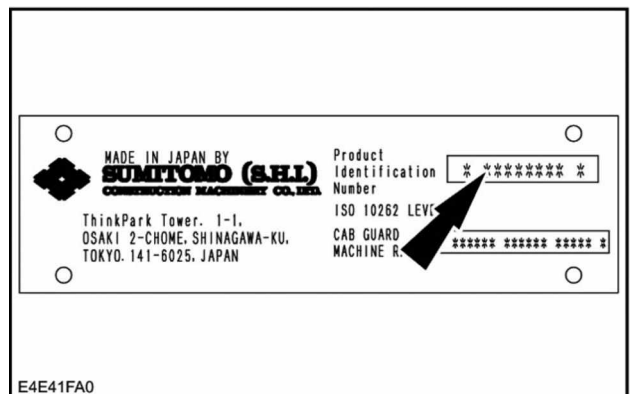


E4E41FA0 6

**Structure protection (ROPS) (Roll Over Protective Structure)**

Complies with ISO 12117-2


Identification number:

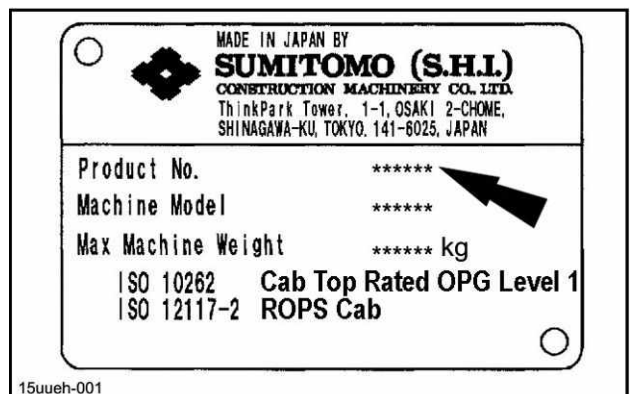

15UUEH-001 7

**Quick coupler (optional)**

- (1) Serial number:
- (2) Weight:
- (3) Working pressure:
- (4) Type:
- (5) Part number:
- (6) Date of manufacture:
- (7) SWL (Safe Working Load):

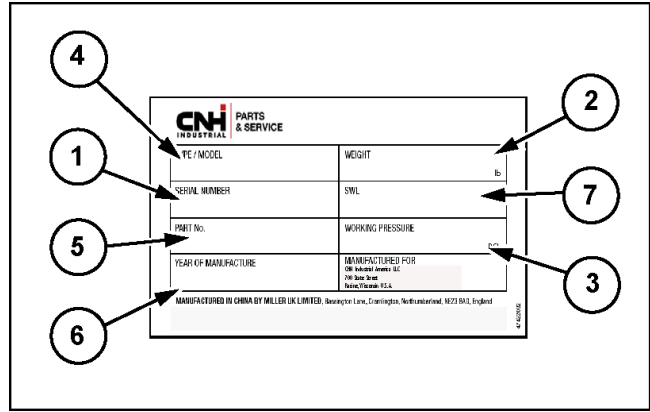

SMIL14CEX0110AB 8

**Component serial numbers**


- Hydraulic pump:
- Swing reduction gear:
- Travel reduction gears:
- Travel control valve:
- Attachment control valve:
- Swing control valve:

## Product identification - Machine orientation

The terms "Right-hand", "Left-hand", "Front" and "Rear" are used in this manual to indicate the sides as they are seen from the operator's seat when the cab is over the idler wheels.

**NOTICE:** the illustration opposite shows the machine in normal travel position. In normal travel position, the cab is over the idler wheels. The travel reduction gears are at the rear of the upperstructure.

- (A) Front
- (B) Rear
- (C) Right-hand side
- (D) Left-hand side
- (E) Travel motors
- (F) Idler wheels

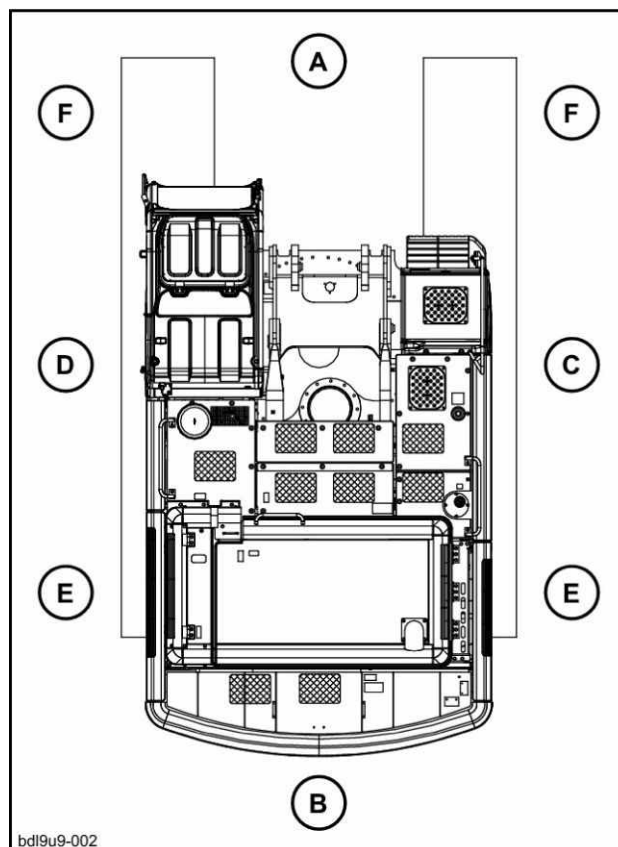

BDL9U9-002 1





# **SERVICE MANUAL**

## **Engine**

**CX300C Crawler excavators LC version (TIER 4) - APAC Region - ANZ Market**



# Contents

---

## Engine - 10

|   |       |
|---|-------|
| [10.001] Engine and crankcase .....                                 | 10.1  |
| [10.102] Pan and covers .....                                       | 10.2  |
| [10.106] Valve drive and gears .....                                | 10.3  |
| [10.101] Cylinder heads .....                                       | 10.4  |
| [10.105] Connecting rods and pistons .....                          | 10.5  |
| [10.103] Crankshaft and flywheel.....                               | 10.6  |
| [10.216] Fuel tanks .....   | 10.7  |
| [10.206] Fuel filters .....   | 10.8  |
| [10.218] Fuel injection system.....                                 | 10.9  |
| [10.250] Turbocharger and lines.....                                | 10.10 |
| [10.254] Intake and exhaust manifolds and muffler .....             | 10.11 |
| [10.500] Selective Catalytic Reduction (SCR) exhaust treatment..... | 10.12 |
| [10.501] Exhaust Gas Recirculation (EGR) exhaust treatment.....     | 10.13 |
| [10.400] Engine cooling system .....                                | 10.14 |
| [10.414] Fan and drive .....  | 10.15 |
| [10.310] Aftercooler.....   | 10.16 |
| [10.304] Engine lubrication system.....                             | 10.17 |
| [10.408] Oil cooler and lines.....                                  | 10.18 |



## **Engine - 10**

### **Engine and crankcase - 001**

**CX300C Crawler excavators LC version (TIER 4) - APAC Region - ANZ Market**

# Contents

---

## Engine - 10

### Engine and crankcase - 001

#### TECHNICAL DATA

|                             |   |
|-----------------------------|---|
| Engine                      |   |
| General specification ..... | 3 |

#### FUNCTIONAL DATA

|                          |   |
|--------------------------|---|
| Engine                   |   |
| Identification .....     | 5 |
| External view .....      | 6 |
| Static description ..... | 8 |

#### SERVICE

|                        |    |
|------------------------|----|
| Engine                 |    |
| Prepare .....          | 10 |
| Remove .....           | 11 |
| Install .....          | 20 |
| Compression test ..... | 21 |
| Crankcase              |    |
| Remove .....           | 23 |
| Inspect .....          | 46 |
| Install .....          | 48 |

## Engine - General specification

### Engine main data

| Item                                 | Engine model 6HK1X  |
|--------------------------------------|---|
| Type                                 | Diesel/4-cycle/water-cooled, inline 6 cylinder OHC                            |
| Shape of combustion chamber          | Direct injection type   |
| Cylinder liner type                  | Dry type  |
| Cylinder bore x stroke               | <b>115 mm (4.53 in) x 125 mm (4.92 in)</b>                                    |
| Displacement                         | <b>7.790 L (2.05790 US gal)</b>   |
| Compression ratio                    | 17.5  |
| Compression pressure                 | <b>3.04 MPa (441 psi) 200 RPM</b>   |
| Idling engine speed                  | <b>900 RPM</b>  |
| Valve clearance                      | In <b>0.4 mm (0.016 in)</b> (while engine is cool)                            |
|                                      | Out <b>0.4 mm (0.016 in)</b> (while engine is cool)                           |
| Ignition type                        | Compression ignition  |
| Injection order                      | 1, 5, 3, 6, 2, 4  |
| Lubrication system                   |   |
| Lubrication type                     | Pressure type   |
| Oil pump type                        | Gear type   |
| Lubrication oil amount               | <b>28 - 38 L (9.5 - 12.2 US gal)</b>  |
| Oil filter type                      | Full-flow filter (cartridge type)   |
| Oil cooled type                      | Built-in, water cooled  |
| Cooling system                       |   |
| Cooling type                         | Water cooled  |
| Radiator type                        | Corrugated fin (pressure type)  |
| Water pump type                      | Centrifugal, belt type  |
| Thermostat type                      | 2-wax type unit   |
| Thermostat valve opening temperature | <b>82 °C (180 °F)</b> without jiggle valve                                    |
|                                      | <b>85 °C (185 °F)</b> with jiggle valve                                       |
| Coolant capacity                     | <b>14.5 L (4.2 US gal)</b>  |
| Fuel system                          |   |
| Injection pump type                  | Electronic control common rail type   |
| Governor type                        | Electronic type   |
| Timer type                           | Electronic type   |
| Injection nozzle type                | Porous type, 7 holes, inner diameter $\varnothing$ <b>0.16 mm (0.0063 in)</b> |
| Battery system                       |   |
| Generator type                       | AC type   |
| Output                               | <b>24 V / 50 A</b>  |
| Regulator type                       | IC  |
| Starter system                       |   |
| Starter type                         | Reduction type  |
| Output                               | <b>24 V / 5.0 kW</b>  |
| Preheat system type                  | Glow plug   |
| Glow plug standard voltage/current   | <b>23 V / 3.5 A</b>   |

This as a preview PDF file from [best-manuals.com](http://best-manuals.com)



Download full PDF manual at [best-manuals.com](http://best-manuals.com)