

JOHN DEERE
WORLDWIDE COMMERCIAL & CONSUMER
EQUIPMENT DIVISION

Compact Utility Tractor
990

TM1848 MARCH 2004

TECHNICAL MANUAL



JOHN DEERE

North American Version
Litho in U.S.A.

INTRODUCTION

Manual Description

This technical manual is written for an experienced technician and contains sections that are specifically for this product. It is a part of a total product support program.

The manual is organized so that all the information on a particular system is kept together. The order of grouping is as follows:

- Table of Contents
- Specifications and Information
- Identification Numbers
- Tools and Materials
- Component Location
- Schematics and Harnesses
- Theory of Operation
- Operation and Diagnostics
- Diagnostics
- Tests and Adjustments
- Repair
- Other

NOTE: Depending on the particular section or system being covered, not all of the above groups may be used.

The bleed tabs for the pages of each section will align with the sections listed on this page. Page numbering is consecutive from the beginning of the Safety section through the last section.

We appreciate your input on this manual. If you find any errors or want to comment on the layout of the manual please contact us.

Safety

Specifications and Information

Engine

Electrical

Power Train

Steering

Hydraulics

Brakes

Miscellaneous

All information, illustrations and specifications in this manual are based on the latest information at the time of publication. The right is reserved to make changes at any time without notice.

COPYRIGHT© 2004

Deere & Co.

John Deere Worldwide Commercial and
Consumer Equipment Division

All rights reserved

Previous Editions

COPYRIGHT© 1998, 2000, 2002, 2003

INTRODUCTION

SAFETY

Recognize Safety Information



MIF

This is the safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.


Follow recommended precautions and safe servicing practices.

Understand Signal Words

A signal word - DANGER, WARNING, or CAUTION - is used with the safety-alert symbol. DANGER identifies the most serious hazards.

DANGER or WARNING safety signs are located near specific hazards. General precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.

Replace Safety Signs

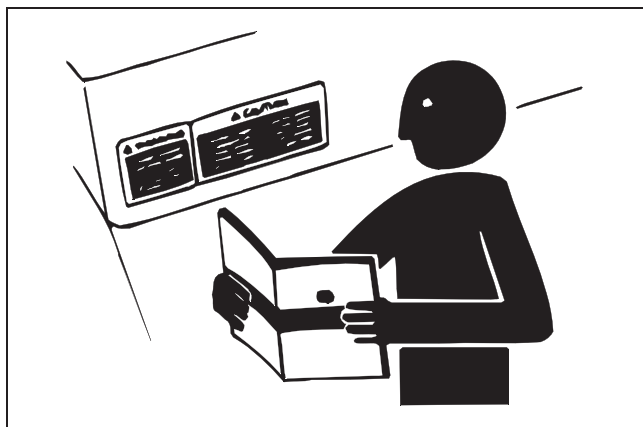


MIF

Replace missing or damaged safety signs. See the machine operator's manual for correct safety sign placement.

Handle Fluids Safely - Avoid Fires

Be Prepared For Emergencies

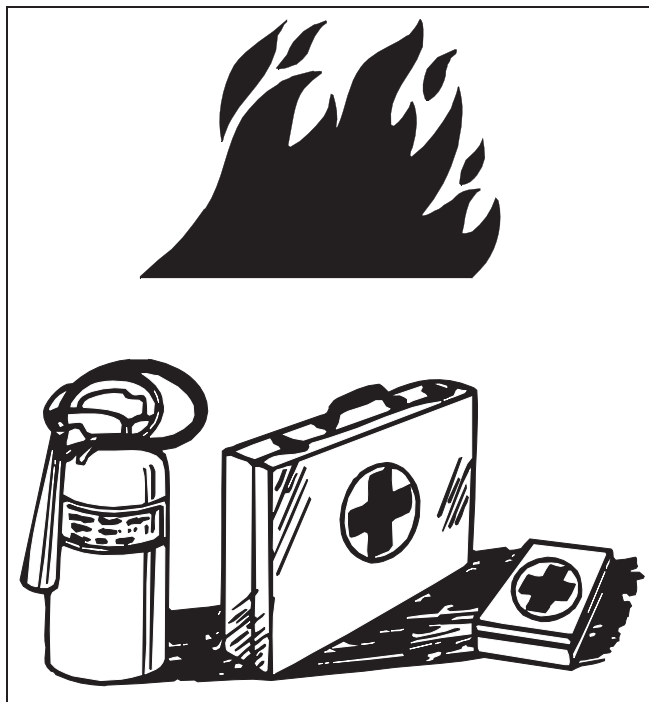


MIF

- When you work around fuel, do not smoke or work near heaters or other fire hazards.
- Store flammable fluids away from fire hazards. Do not incinerate or puncture pressurized containers.
- Make sure machine is clean of trash, grease, and debris.
- Do not store oily rags; they can ignite and burn spontaneously.
- Be prepared if a fire starts.
- Keep a first aid kit and fire extinguisher handy.
- Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

SAFETY

Use Care In Handling and Servicing Batteries

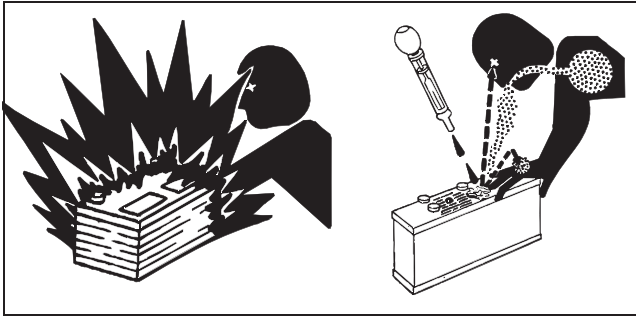

MIF

Prevent Battery Explosions

- Keep sparks, lighted matches, and open flame away from the top of battery. Battery gas can explode.
- Never check battery charge by placing a metal object across the posts. Use a volt-meter or hydrometer.
- Do not charge a frozen battery; it may explode. Warm battery to 16°C (60°F).

Prevent Acid Burns

- Sulfuric acid in battery electrolyte is poisonous. It is strong enough to burn skin, eat holes in clothing, and cause blindness if splashed into eyes.

Avoid acid burns by:

1. Filling batteries in a well-ventilated area.
2. Wearing eye protection and rubber gloves.
3. Avoiding breathing fumes when electrolyte is added.
4. Avoiding spilling or dripping electrolyte.
5. Use proper jump start procedure.

If you spill acid on yourself:

1. Flush your skin with water.
2. Apply baking soda or lime to help neutralize the acid.
3. Flush your eyes with water for 10 - 15 minutes.
4. Get medical attention immediately.

If acid is swallowed:

1. Drink large amounts of water or milk.
2. Then drink milk of magnesia, beaten eggs, or vegetable oil.
3. Get medical attention immediately.

Wear Protective Clothing



MIF

Wear close fitting clothing and safety equipment appropriate to the job.

Prolonged exposure to loud noise can cause impairment or loss of hearing. Wear a suitable hearing protective device such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.

Operating equipment safely requires the full attention of the operator. Do not wear radio or music headphones while operating machine.

Use Care Around High-pressure Fluid Lines

Avoid High-Pressure Fluids



MIF

Escaping fluid under pressure can penetrate the skin causing serious injury.

Avoid injury from escaping fluid under pressure by stopping the engine and relieving pressure in the system before disconnecting or connecting hydraulic or other lines. Tighten all connections before applying pressure.

Search for leaks with a piece of cardboard. Protect hands and body from high pressure fluids.

If an accident occurs, see a doctor immediately. Any fluid injected into the skin must be surgically removed within a few hours or gangrene may result. Doctors unfamiliar with this type of injury should reference a knowledgeable medical source. Such information is available from Deere & Company Medical Department in Moline, Illinois, U.S.A.

SAFETY


Avoid Heating Near Pressurized Fluid Lines



MIF

Flammable spray can be generated by heating near pressurized fluid lines, resulting in severe burns to yourself and bystanders. Do not heat by welding, soldering, or using a torch near pressurized fluid lines or other flammable materials. Pressurized lines can be accidentally cut when heat goes beyond the immediate flame area.

Service Machines Safely

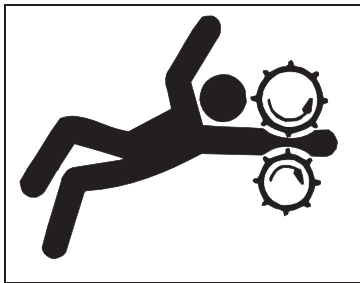

MIF


Tie long hair behind your head. Do not wear a necktie, scarf, loose clothing, or necklace when you work near machine tools or moving parts. If these items were to get caught, severe injury could result.

Remove rings and other jewelry to prevent electrical shorts and entanglement in moving parts.

Use Proper Tools

Use tools appropriate to the work. Makeshift tools and procedures can create safety hazards. Use power tools only to loosen threaded parts and fasteners. For loosening and tightening hardware, use the correct size tools. **DO NOT** use U.S. measurement tools on metric fasteners. Avoid bodily injury caused by slipping wrenches. Use only service parts meeting John Deere specifications.

Park Machine Safely

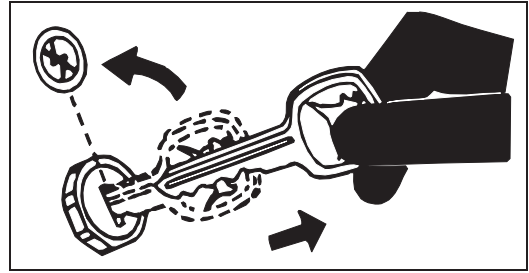


MIF

Before working on the machine:

1. Lower all equipment to the ground.
2. Stop the engine and remove the key.
3. Disconnect the battery ground strap.
4. Hang a "DO NOT OPERATE" tag in operator station.

Support Machine Properly and Use Proper Lifting Equipment

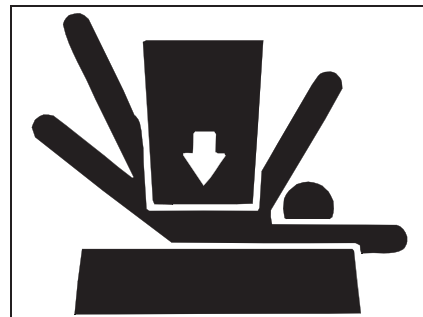

MIF

If you must work on a lifted machine or attachment, securely support the machine or attachment.

Do not support the machine on cinder blocks, hollow tiles, or props that may crumble under continuous load. Do not work under a machine that is supported solely by a jack. Follow recommended procedures in this manual.

Lifting heavy components incorrectly can cause severe injury or machine damage. Follow recommended procedure for removal and installation of components in the manual.

Work In Clean Area

Before starting a job:

1. Clean work area and machine.
2. Make sure you have all necessary tools to do your job.
3. Have the right parts on hand.
4. Read all instructions thoroughly; do not attempt shortcuts.

SAFETY


Using High Pressure Washers

Directing pressurized water at electronic/electrical components or connectors, bearings, hydraulic seals, fuel injection pumps or other sensitive parts and components may cause product malfunctions. Reduce pressure and spray at a 45 to 90 degree angle.

Illuminate Work Area Safely

Illuminate your work area adequately but safely. Use a portable safety light for working inside or under the machine. Make sure the bulb is enclosed by a wire cage. The hot filament of an accidentally broken bulb can ignite spilled fuel or oil.

Work In Ventilated Area

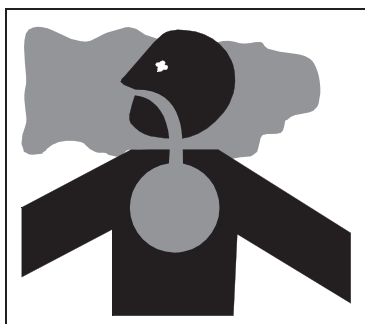

MIF

Engine exhaust fumes can cause sickness or death. If it is necessary to run an engine in an enclosed area, remove the exhaust fumes from the area with an exhaust pipe extension.

If you do not have an exhaust pipe extension, open the doors and get outside air into the area.

Warning: California Proposition 65 Warning

Gasoline engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects, and other reproductive harm.

Remove Paint Before Welding or Heating

Avoid potentially toxic fumes and dust. Hazardous fumes can be generated when paint is heated by welding, soldering, or using a torch. Do all work outside or in a well ventilated area. Dispose of paint and solvent properly. Remove paint before welding or heating: If you sand or grind paint, avoid breathing the dust. Wear an approved respirator. If you use solvent or paint stripper, remove stripper with soap and water before welding. Remove

solvent or paint stripper containers and other flammable material from area. Allow fumes to disperse at least 15 minutes before welding or heating.

Avoid Harmful Asbestos Dust

Avoid breathing dust that may be generated when handling components containing asbestos fibers. Inhaled asbestos fibers may cause lung cancer.

Components in products that may contain asbestos fibers are brake pads, brake band and lining assemblies, clutch plates, and some gaskets. The asbestos used in these components is usually found in a resin or sealed in some way. Normal handling is not hazardous as long as airborne dust containing asbestos is not generated.

Avoid creating dust. Never use compressed air for cleaning. Avoid brushing or grinding material containing asbestos. When servicing, wear an approved respirator. A special vacuum cleaner is recommended to clean asbestos. If not available, apply a mist of oil or water on the material containing asbestos. Keep bystanders away from the area.

Service Tires Safely



MIF

Explosive separation of a tire and rim parts can cause serious injury or death.

Do not attempt to mount a tire unless you have the proper equipment and experience to perform the job.


Always maintain the correct tire pressure. Do not inflate the tires above the recommended pressure. Never weld or heat a wheel and tire assembly. The heat can cause an increase in air pressure resulting in a tire explosion. Welding can structurally weaken or deform the wheel.

When inflating tires, use a clip-on chuck and extension hose long enough to allow you to stand to one side and NOT in front of or over the tire assembly. Use a safety cage if available.

Check wheels for low pressure, cuts, bubbles, damaged rims or missing lug bolts and nuts.

SAFETY


Avoid Injury From Rotating Blades, Augers and PTO Shafts

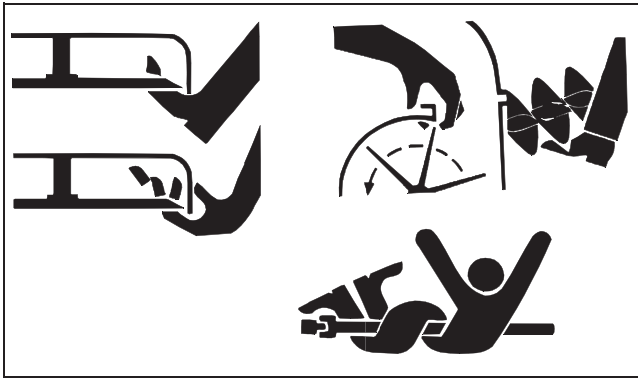

MIF

Keep hands and feet away while machine is running. Shut off power to service, lubricate or remove mower blades, augers or PTO shafts.

Service Cooling System Safely

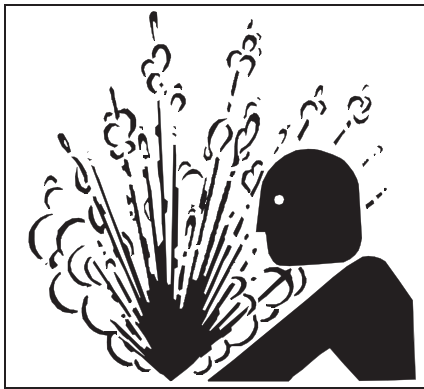

MIF

Explosive release of fluids from pressurized cooling system can cause serious burns.

Shut off machine. Only remove filler cap when cool enough to touch with bare hands. Slowly loosen cap to first stop to relieve pressure before removing completely.

Dispose Of Waste Properly

Improperly disposing of waste can threaten the environment and ecology. Potentially harmful waste used with John Deere equipment include such items as oil, fuel, coolant, brake fluid, filters, and batteries. Use leakproof containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them. Do not pour waste onto the ground, down a drain, or into any water source. Inquire on the proper way to recycle or dispose of waste from your local environmental or recycling center, or from your John Deere dealer.

Handle Chemical Products Safely



MIF

Direct exposure to hazardous chemicals can cause serious injury. Potentially hazardous chemicals used with John Deere equipment include such items as lubricants, coolants, paints, and adhesives.

A Material Safety Data Sheet (MSDS) provides specific details on chemical products: physical and health hazards, safety procedures, and emergency response techniques. Check the MSDS before you start any job using a hazardous chemical. That way you will know exactly what the risks are and how to do the job safely. Then follow procedures and recommended equipment.

Live With Safety



MIF

Before returning machine to customer, make sure machine is functioning properly, especially the safety systems. Install all guards and shields.

SAFETY



SPECIFICATIONS & INFORMATION TABLE OF CONTENTS

Table of Contents

General Specifications	9
Metric Fastener Torque Values	9
Metric Fastener Torque Values—Grade 7 ...	10
Inch Fastener Torque Values	11
Gasket Sealant Application	12
O-Ring Seal Service Recommendations	12
Face Seal Fittings with Inch Stud Ends Torque	12
Face Seal Fittings with Metric Stud Ends Torque	13
O-Ring Face Seal Fittings	14
O-Ring Boss Fittings	14
Fuels and Lubricants.....	15
Diesel Fuel Specifications	15
Diesel Fuel Lubricity	15
Diesel Fuel Storage	16
Engine Oil.....	16
Engine Break-in Oil.....	16
Alternative Lubricants	17
Synthetic Lubricants	17
Lubricant Storage	17
Mixing Of Lubricants.....	17
Chassis Grease	17
Transaxle Oil	18
Coolant Specifications	19
Engine Coolant.....	19
Engine Coolant Drain Interval	19
Serial Number Locations	20
Machine Product Identification Number	20
Engine Serial Number	20



SPECIFICATIONS & INFORMATION GENERAL SPECIFICATIONS

General Specifications

Metric Fastener Torque Values

Property Class and Head Markings	4.8	8.8	9.8	10.9	12.9
					
Property Class and Nut Markings	5	10	10	10	12
					

TS1163

	Class 4.8				Class 8.8 or 9.8				Class 10.9				Class 12.9			
	Lubricated ^a		Dry ^a		Lubricated ^a		Dry ^a		Lubricated ^a		Dry ^a		Lubricated ^a		Dry ^a	
SIZE	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft
M6	4.8	3.5	6	4.5	9	6.5	11	8.5	13	9.5	17	12	15	11.5	19	14.5
M8	12	8.5	15	11	22	16	28	20	32	24	40	30	37	28	47	35
M10	23	17	29	21	43	32	55	40	63	47	80	60	75	55	95	70
M12	40	29	50	37	75	55	95	70	110	80	140	105	130	95	165	120
M14	63	47	80	60	120	88	150	110	175	130	225	165	205	150	260	190
M16	100	73	125	92	190	140	240	175	275	200	350	225	320	240	400	300
M18	135	100	175	125	260	195	330	250	375	275	475	350	440	325	560	410
M20	190	140	240	180	375	275	475	350	530	400	675	500	625	460	800	580
M22	260	190	330	250	510	375	650	475	725	540	925	675	850	625	1075	800
M24	330	250	425	310	650	475	825	600	925	675	1150	850	1075	800	1350	1000
M27	490	360	625	450	950	700	1200	875	1350	1000	1700	1250	1600	1150	2000	1500
M30	675	490	850	625	1300	950	1650	1200	1850	1350	2300	1700	2150	1600	2700	2000
M33	900	675	1150	850	1750	1300	2200	1650	2500	1850	3150	2350	2900	2150	3700	2750
M36	1150	850	1450	1075	2250	1650	2850	2100	3200	2350	4050	3000	3750	2750	4750	3500

- DO NOT use these hand torque values if a different torque value or tightening procedure is given for a specific application. Torque values listed are for general use only and include a $\pm 10\%$ variance factor. Check tightness of fasteners periodically. DO NOT use air powered wrenches.

- Shear bolts are designed to fail under predetermined loads. Always replace shear bolts with identical grade.
- Fasteners should be replaced with the same class. Make sure fastener threads are clean and that you properly start thread engagement. This will prevent them from failing

when tightening.

- When bolt and nut combination fasteners are used, torque values should be applied to the **NUT** instead of the bolt head.
- Tighten toothed or serrated-type lock nuts to the full torque value.

^a “Lubricated” means coated with a lubricant such as engine oil, or fasteners with phosphate and oil coatings. “Dry” means plain or zinc plated (yellow dichromate—Specification JDS117) without any lubrication.

Reference: JDS-200

Metric Fastener Torque Values—Grade 7

Size	Steel or Gray Iron Torque	Aluminum Torque
	N•m (lb-ft)	N•m (lb-ft)
M6	11 (8)	8 (6)
M8	24 (18)	19 (14)
M10	52 (38)	41 (30)
M12	88 (65)	70 (52)
M14	138 (102)	111 (82)
M16	224 (165)	179 (132)

SPECIFICATIONS & INFORMATION GENERAL SPECIFICATIONS

Inch Fastener Torque Values

SAE Grade and Head Markings	1 or 2 ^b No Marks 	5  5.1  5.2 	8  8.2 
SAE Grade and Nut Markings	2 No Marks 	5  	8  

TS1162

TS1162

	Grade 1				Grade 2 ^b				Grade 5, 5.1 or 5.2				Grade 8 or 8.2			
	Lubricated ^a		Dry ^a		Lubricated ^a		Dry ^a		Lubricated ^a		Dry ^a		Lubricated ^a		Dry ^a	
SIZE	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft	N•m	lb-ft
1/4	3.7	2.8	4.7	3.5	6	4.5	7.5	5.5	9.5	7	12	9	13.5	10	17	12.5
5/16	7.7	5.5	10	7	12	9	15	11	20	15	25	18	28	21	35	26
3/8	14	10	17	13	22	16	27	20	35	26	44	33	50	36	63	46
7/16	22	16	28	20	35	26	44	32	55	41	70	52	80	58	100	75
1/2	33	25	42	31	53	39	67	50	85	63	110	80	120	90	150	115
9/16	48	36	60	45	75	56	95	70	125	90	155	115	175	130	225	160
5/8	67	50	85	62	105	78	135	100	170	125	215	160	215	160	300	225
3/4	120	87	150	110	190	140	240	175	300	225	375	280	425	310	550	400
7/8	190	140	240	175	190	140	240	175	490	360	625	450	700	500	875	650
1	290	210	360	270	290	210	360	270	725	540	925	675	1050	750	1300	975
1-1/8	470	300	510	375	470	300	510	375	900	675	1150	850	1450	1075	1850	1350
1-1/4	570	425	725	530	570	425	725	530	1300	950	1650	1200	2050	1500	2600	1950
1-3/8	750	550	950	700	750	550	950	700	1700	1250	2150	1550	2700	2000	3400	2550
1-1/2	1000	725	1250	925	990	725	1250	930	2250	1650	2850	2100	3600	2650	4550	3350

- DO NOT use these hand torque values if a different torque value or tightening procedure is given for a specific application. Torque values listed are for general use only and include a $\pm 10\%$ variance factor. Check tightness of fasteners periodically. DO NOT use air powered wrenches.

- Shear bolts are designed to fail under predetermined loads. Always replace shear bolts with identical grade.

- Fasteners should be replaced with the same class. Make sure fastener threads are clean and that you properly start thread engagement. This will prevent them from failing when tightening.

- When bolt and nut combination fasteners are used, torque values should be applied to the **NUT** instead of the bolt head.

- Tighten toothed or serrated-type lock nuts to the full torque value.

a “**Lubricated**” means coated with a lubricant such as engine oil, or fasteners with phosphate and oil coatings. “**Dry**” means plain or zinc plated (yellow dichromate—Specification JDS117) without any lubrication.

b “**Grade 2**” applies for hex cap screws (not hex bolts) up to 152 mm (6 in.) long “**Grade 1**” applies for hex cap screws over 152 mm (6 in.) long, and for all other types of bolts and screws of any length.

Reference: JDS-G200

SPECIFICATIONS & INFORMATION O-RING SEAL SERVICE

Gasket Sealant Application

Cleaning:

Clean both surfaces that will be joined using 100% isopropyl alcohol. Wipe excess off with a clean cloth. Cleaner/degreaser can be substituted for isopropyl alcohol.

How to Dispense/Apply/Assemble Gasket Sealants:

Dispense approximately 1 to 2 ounces of flexible form-in-place gasket on a clean sheet or table top. Avoid using excess amounts that may be exposed for long periods of time. This will help prevent contamination from surrounding atmosphere such as dust with metal content.

Using an ink roller or similar device, apply to one surface of the joint by loading the roller from a plastic sheet and transferring the material in a thin film to the joint. The application should be the thinnest film possible, but

providing complete coverage. This can be judged by the appearance of the joint once it is put together. Excessive amounts of will cause incorrect bearing end play, extend cure time, and will cause runoff of the material. A small bead or buildup at the joint is permissible and indicates good dispersion through the joint. Excess can be wiped from the joint. Joining should take place within three minutes after sealant application.


Apply proper cap screw torque and sequence as applicable. Allow a minimum of 30 minutes before air test or adding oil for test stand usage.

Disassembly:

Cured material can be removed with a wire brush or scraper. Chemical cleaners are available for customer use, should they be deemed necessary.

O-Ring Seal Service Recommendations

Face Seal Fittings with Inch Stud Ends Torque

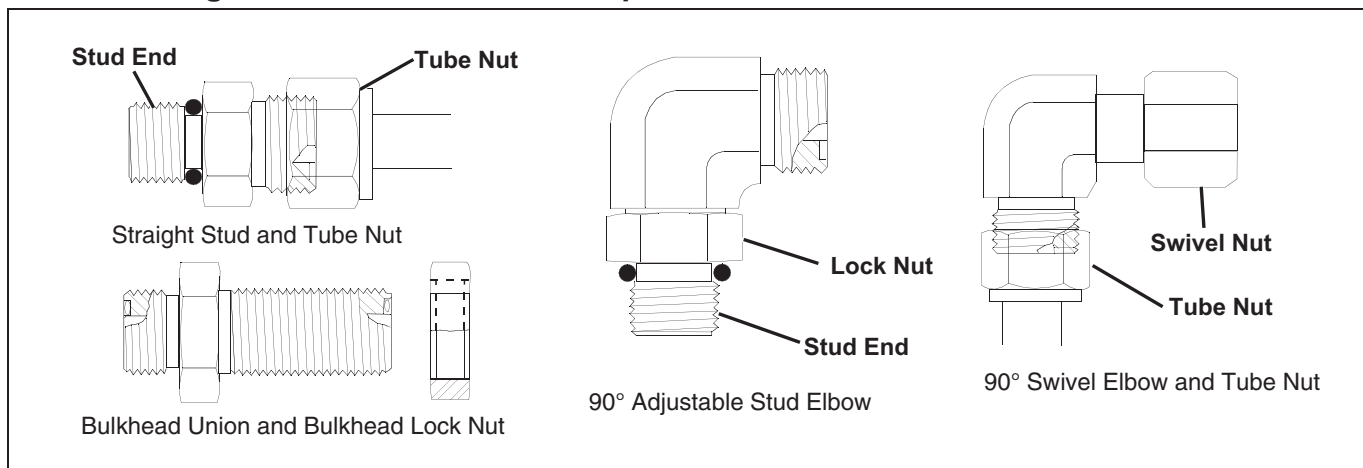

MIF


Nominal Tube OD/Hose ID				Face Seal Tube/Hose End					O-Ring Stud Ends		
Metric Tube OD	Inch Tube OD			Thread Size	Tube Nut/ Swivel Nut Torque		Bulkhead Lock Nut Torque		Thread Size	Straight Fitting or Lock Nut Torque	
mm	Dash Size	in.	mm	in.	N•m	lb-ft	N•m	lb-ft	in.	N•m	lb-ft
	-3	0.188	4.76						3/8-24	8	6
6	-4	0.250	6.35	9/16-18	16	12	12	9	7/16-20	12	9
8	-5	0.312	7.94						1/2-20	16	12
10	-6	0.375	9.52	11/16-16	24	18	24	18	9/16-18	24	18
12	-8	0.500	12.70	13/16-16	50	37	46	34	3/4-16	46	34

SPECIFICATIONS & INFORMATION O-RING SEAL SERVICE

Nominal Tube OD/Hose ID				Face Seal Tube/Hose End					O-Ring Stud Ends		
Metric Tube OD	Inch Tube OD			Thread Size	Tube Nut/ Swivel Nut Torque		Bulkhead Lock Nut Torque		Thread Size	Straight Fitting or Lock Nut Torque	
mm	Dash Size	in.	mm	in.	N•m	lb-ft	N•m	lb-ft	in.	N•m	lb-ft
16	-10	0.625	15.88	1-14	69	51	62	46	7/8-14	62	46
	-12	0.750	19.05	1-3/16-12	102	75	102	75	1-1/16-12	102	75
22	-14	0.875	22.22	1-3/16-12	102	75	102	75	1-3/16-12	122	90
25	-16	1.000	25.40	1-7/16-12	142	105	142	105	1-5/16-12	142	105
32	-20	1.25	31.75	1-11/16-12	190	140	190	140	1-5/8-12	190	140
38	-24	1.50	38.10	2-12	217	160	217	160	1-7/8-12	217	160

NOTE: Torque tolerance is +15%, -20%

Face Seal Fittings with Metric Stud Ends Torque

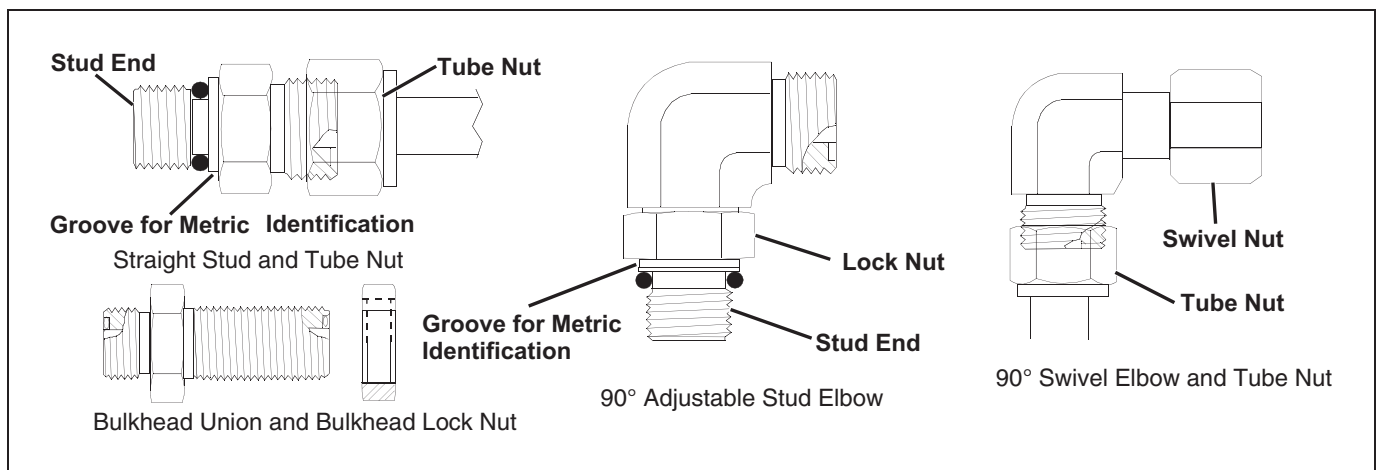

MIF


Nominal Tube OD/Hose ID				Face Seal Tube/Hose End						O-Ring Stud Ends, Straight Fitting or Lock Nut					
Metric Tube OD	Inch Tube OD			Thread Size	Hex Size	Tube Nut/ Swivel Nut Torque		Bulkhead Lock Nut Torque		Thread Size	Hex Size	Steel or Gray Iron Torque		Aluminum Torque	
mm	Dash Size	in.	mm	in.	mm	N•m	lb-ft	N•m	lb-ft	mm	mm	N•m	lb-ft	N•m	lb-ft
6	-4	0.250	6.35	9/16-18	17	16	12	12	9	M12X1.5	17	21	15.5	9	6.6
8	-5	0.312	7.94												
										M14X1.5	19	33	24	15	11

SPECIFICATIONS & INFORMATION O-RING SEAL SERVICE

Nominal Tube OD/Hose ID				Face Seal Tube/Hose End						O-Ring Stud Ends, Straight Fitting or Lock Nut					
Metri c Tube OD	Inch Tube OD			Thread Size	Hex Siz e	Tube Nut/ Swivel Nut Torque		Bulkhead Lock Nut Torque		Thread Size	Hex Siz e	Steel or Gray Iron Torque		Aluminu m Torque	
mm	Dash Size	in.	mm	in.	mm	N• m	lb-ft	N• m	lb-ft	mm	mm	N• m	lb-ft	N• m	lb-ft
10	-6	0.375	9.52	11/16-16	22	24	18	24	18	M16X1.5	22	41	30	18	13
12	-8	0.500	12.70	13/16-16	24	50	37	46	34	M18X1.5	24	50	37	21	15
16	-10	0.625	15.88	1-14	30	69	51	62	46	M22X1.5	27	69	51	28	21
	-12	0.750	19.05	1-3/16-12	36	102	75	102	75	M27X2	32	102	75	46	34
22	-14	0.875	22.22	1-3/16-12	36	102	75	102	75	M30X2	36				
25	-16	1.000	25.40	1-7/16-12	41	142	105	142	105	M33X2	41	158	116	71	52
28										M38X2	46	176	130	79	58
32	-20	1.25	31.75	1-11/16-12	50	190	140	190	140	M42X2	50	190	140	85	63
38	-24	1.50	38.10	2-12	60	217	160	217	160	M48X2	55	217	160	98	72

NOTE: Torque tolerance is +15%, -20%

O-Ring Face Seal Fittings

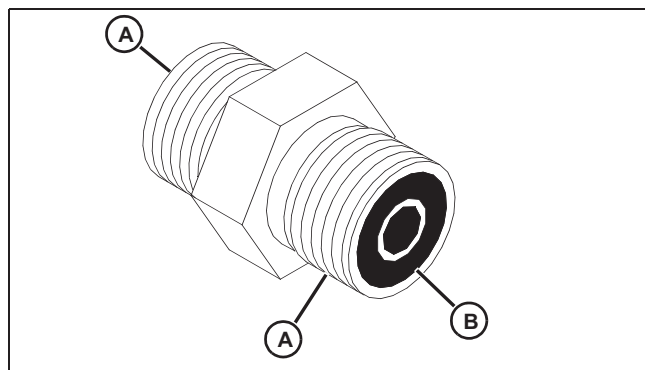

MIF


1. Inspect the fitting sealing surfaces (A). They must be free of dirt or defects.
2. Inspect the O-ring (B). It must be free of damage or defects.
3. Lubricate O-rings and install into groove using petroleum jelly to hold in place.
4. Push O-ring into the groove with plenty of petroleum jelly so O-ring is not displaced during assembly.
5. Index angle fittings and tighten by hand-pressing joint together to ensure O-ring remains in place.

IMPORTANT: Avoid damage! DO NOT allow hoses to twist when tightening fittings. Use two wrenches to tighten hose connections; one to hold the hose, and the other to tighten the swivel fitting.

6. Tighten fitting or nut to torque value shown on the chart per dash size stamped on the fitting.

O-Ring Boss Fittings

1. Inspect boss O-ring boss seat. It must be free of dirt and defects. If repeated leaks occur, inspect for defects with a magnifying glass. Some raised defects can be removed with a slip stone.

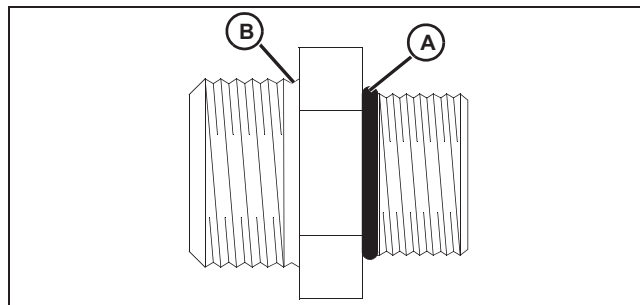


MIF

2. Put hydraulic oil or petroleum jelly on the O-ring (A). Place electrical tape over the threads to protect

SPECIFICATIONS & INFORMATION FUELS AND LUBRICANTS

O-ring from nicks. Slide O-ring over the tape and into the groove (B) of fitting. Remove tape.

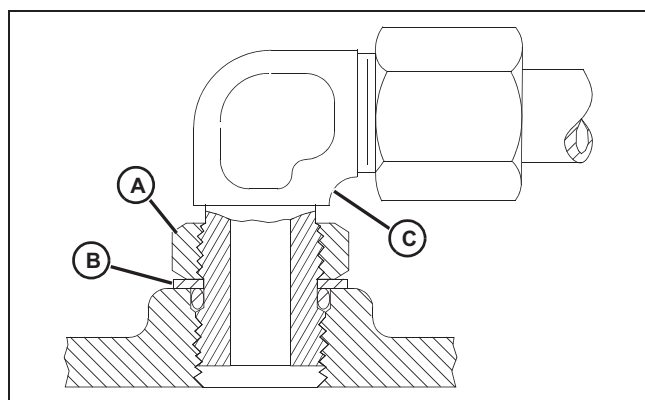

3. For angle fittings, loosen special nut (A) and push special washer (B) against threads so O-ring can be installed into the groove of fitting.
4. Turn fitting into the boss by hand until special washer or washer face (straight fitting) contacts boss face and O-ring is squeezed into its seat.
5. To position angle fittings (C), turn the fitting counter-clockwise a maximum of one turn.
6. Tighten straight fittings to torque value shown on chart. For angle fittings, tighten the special nut to value shown in the chart while holding body of fitting with a wrench.

Thread Size	Torque ^a		Number of Flats ^b
	N•m	lb-ft	
3/8-24 UNF	8	6	2
7/16-20 UNF	12	9	2
1/2-20 UNF	16	12	2
9/16-18 UNF	24	18	2
3/4-16 UNF	46	34	2
7/8-14 UNF	62	46	1-1/2
1-1/16-12 UN	102	75	1
1-3/16-12 UN	122	90	1
1-5/16-12 UN	142	105	3/4
1-5/8-12 UN	190	140	3/4
1-7/8-12 UN	217	160	1/2

^aTorque tolerance is ± 10 percent.

^bTo be used if a torque wrench cannot be used. After tightening fitting by hand, put a mark on nut or boss; then

tighten special nut or straight fitting the number of flats shown.

Fuels and Lubricants

Diesel Fuel Specifications



CAUTION: Avoid injury! California Proposition 65 Warning: Diesel engine exhaust and some of its elements from this product are known to the State of California to cause cancer, birth defects, or other reproductive harm.

In general, diesel fuels are blended to satisfy the low air temperature requirements of the geographical area in which they are sold.

In North America, diesel fuel is usually specified to **ASTM D975** and sold as either **Grade 1** for cold air temperatures or **Grade 2** for warm air temperatures.

If diesel fuels being supplied in your area DO NOT meet any of the above specifications, use diesel fuels with the following equivalent properties:

- **Cetane Number 40 (minimum)**

A cetane number **greater than 50 is preferred**, especially for air temperatures below -20°C (-4°F) or elevations above 1500 m (5000 ft).

- **Cold Filter Plugging Point (CFPP)**

The air temperature at which diesel fuel **begins to cloud or jell** — at least 5°C (9°F) below the expected low air temperature range.

- **Sulfur Content of 0.05% (maximum)**

Diesel fuels for highway use in the United States now require sulfur content to be **less than 0.05%**.

If diesel fuel being used has a sulfur content **greater than 0.05%**, **reduce the service interval for engine oil and filter by 50%**.

Consult your local diesel fuel distributor for properties of the diesel fuel available in your area.

Diesel Fuel Lubricity

Diesel fuel must have adequate lubricity to ensure proper operation and durability of fuel injection system components. Fuel lubricity should pass a **minimum of 3300 gram load level** as measured by the **BOCLE** scuffing test.

Diesel Fuel Storage

IMPORTANT: Avoid damage! DO NOT USE GALVANIZED CONTAINERS—diesel fuel stored in galvanized containers reacts with zinc coating in the container to form zinc flakes. If fuel contains water, a zinc gel will also form. The gel and flakes will quickly plug fuel filters and damage fuel injectors and fuel pumps.

It is recommended that diesel fuel be stored **ONLY** in a clean, approved **POLYETHYLENE PLASTIC** container **WITHOUT** any metal screen or filter. This will help prevent any accidental sparks from occurring. Store fuel in an area that is well ventilated to prevent possible igniting of fumes by an open flame or spark, this includes any appliance with a pilot light.

IMPORTANT: Avoid damage! Keep all dirt, scale, water or other foreign material out of fuel.

Keep fuel in a safe, protected area and in a clean, properly marked (“**DIESEL FUEL**”) container. **DO NOT** use de-icers to attempt to remove water from fuel. **DO NOT** depend on fuel filters to remove water from fuel. It is recommended that a water separator be installed in the storage tank outlet. **BE SURE** to properly discard unstable or contaminated diesel fuel and/or their containers when necessary.

Engine Oil

Use the appropriate oil viscosity based on the expected air temperature range during the period between recommended oil changes. Operating outside of these recommended oil air temperature ranges may cause premature engine failure.

The following John Deere oil is **PREFERRED**:

- TORQ-GARD SUPREME®—SAE 5W-30;
- PLUS-50®—SAE 15W-40;

Other oils may be used if above John Deere oils are not available, provided they meet one of the following specifications:

- SAE 15W-40—API Service Classification CH-4 or higher;
- SAE 10W-30—API Service Classification CG-4 (4-cycle) or higher;

John Deere Dealers: You may want to cross-reference the following publications to recommend the proper oil for your customers:

- Module DX, ENOIL2 in JDS-G135;
- Section 530, Lubricants & Hydraulics, of the John Deere

Merchandise Sales Guide;

- Lubrication Sales Manual PI7032.

Engine Break-in Oil

IMPORTANT: Avoid damage! ONLY use a quality break-in oil in rebuilt or remanufactured engines for the first 5 hours (maximum) of operation. DO NOT use oils with heavier viscosity weights than SAE 5W-30 or oils meeting specifications API SG or SH, these oils will not allow rebuilt or remanufactured engines to break-in properly.

The following John Deere oil is **PREFERRED**:

- **BREAK-IN ENGINE OIL.**

John Deere BREAK-IN ENGINE OIL is formulated with special additives for aluminum and cast iron type engines to allow the power cylinder components (pistons, rings, and liners as well) to “wear-in” while protecting other engine components, valve train and gears, from abnormal wear. Engine rebuild instructions should be followed closely to determine if special requirements are necessary.

John Deere BREAK-IN ENGINE OIL is also recommended for non-John Deere engines, both aluminum and cast iron types.


The following John Deere oil is **also recommended as a break-in engine oil**:

- **TORQ-GARD SUPREME®—SAE 5W-30.**

If the above recommended John Deere oils are not available, use a break-in engine oil meeting the following specification during the first 5 hours (maximum) of operation:

- SAE 5W-30—API Service Classification SE or higher.

IMPORTANT: Avoid damage! After the break-in period, use the John Deere oil that is recommended for this engine.

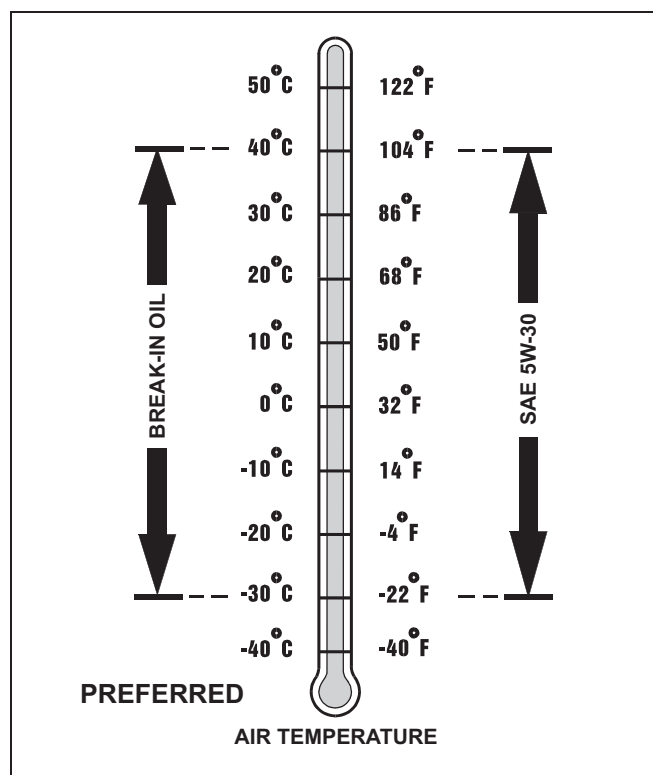

M58275

John Deere Dealers: You may want to cross-reference the following publications to recommend the proper oil for your customers:

- Module DX, ENOIL4 in JDS-G135;
- Section 530, Lubricants & Hydraulics, of the John Deere Merchandise Sales Guide;
- Lubrication Sales Manual PI7032.

Alternative Lubricants

Conditions in certain geographical areas outside the United States and Canada may require different lubricant recommendations than the ones printed in this technical manual or the operator's manual. Consult with your John Deere Dealer, or Sales Branch, to obtain the alternative lubricant recommendations.

IMPORTANT: Avoid damage! Use of alternative lubricants could cause reduced life of the component.

If alternative lubricants are to be used, it is recommended that the factory fill be thoroughly removed before switching to any alternative lubricant.

Synthetic Lubricants

Synthetic lubricants may be used in John Deere equipment if they meet the applicable performance requirements (industry classification and/or military specification) as shown in this manual.

The recommended air temperature limits and service or lubricant change intervals should be maintained as shown in the operator's manual.

Avoid mixing different brands, grades, or types of oil. Oil manufacturers blend additives in their oils to meet certain specifications and performance requirements. Mixing different oils can interfere with the proper functioning of these additives and degrade lubricant performance.

Lubricant Storage

All machines operate at top efficiency only when clean lubricants are used. Use clean storage containers to handle all lubricants. Store them in an area protected from dust, moisture, and other contamination. Store drums on their sides. Make sure all containers are properly marked as to their contents. Dispose of all old, used containers and their contents properly.

Mixing Of Lubricants

In general, avoid mixing different brands or types of lubricants. Manufacturers blend additives in their lubricants to meet certain specifications and performance requirements. Mixing different lubricants can interfere with the proper functioning of these additives and lubricant properties which will downgrade their intended specified performance.

Chassis Grease

Use the following grease based on the air temperature range. Operating outside of the recommended grease air temperature range may cause premature failures.


The following John Deere grease is **PREFERRED**:

- **NON-CLAY HIGH-TEMPERATURE EP GREASE®—JDM J13E4, NLGI Grade 2.**

- Multi-Purpose SD Polyurea Grease
- Multi-Purpose HD Lithium Complex Grease

Other greases may be used if above preferred John Deere grease is not available, provided they meet the following specification:

- John Deere Standard JDM J13E4, NLGI Grade 2.

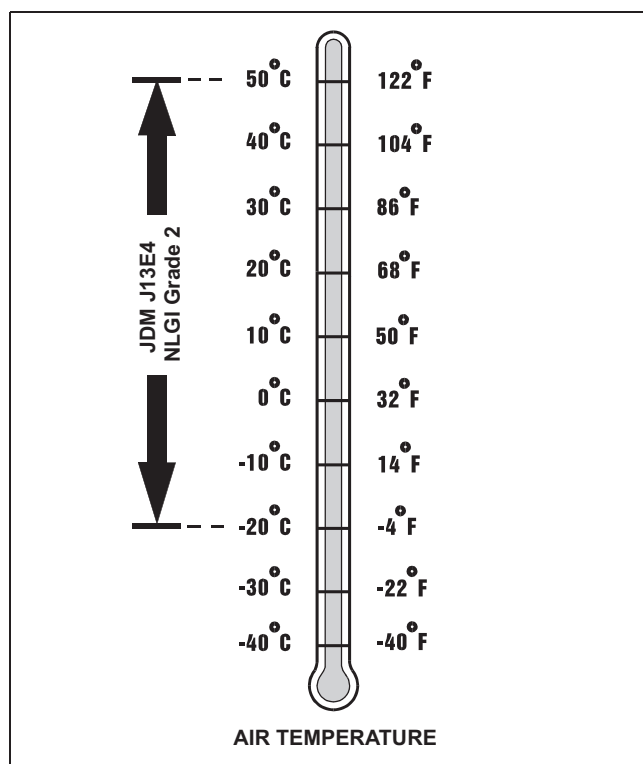


M58275

John Deere Dealers: You may want to cross-reference the following publications to recommend the proper grease for your customers:

- Module DX,GREA1 in JDS-G135;
- Section 530, Lubricants & Hydraulics, of the John Deere Merchandise Sales Guide;
- Lubrication Sales Manual P17032.

Transaxle Oil

These machines are equipped with a internal wet disc brake transmission.

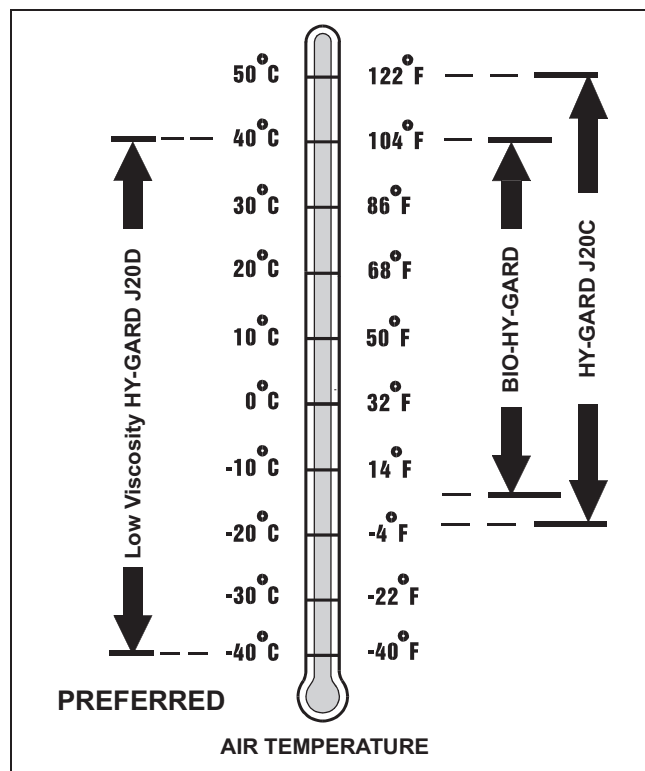

MIF

IMPORTANT: Avoid damage! Transaxle is filled with John Deere HY-Gard® (J20C) transmission oil at the factory. DO NOT mix oils.

Do not use type "F" automatic transmission fluid.

Use only Hy-Gard® (J20C) or Low Viscosity Hy-Gard (J20D) transmission oil.

John Deere Low Viscosity Hy-Gard transmission oil is specially formulated for operation below -18°C (0°F) to provide maximum protection for the hydraulic system.

The following John Deere oil is **PREFERRED**:

- **Hy-Gard J20C Oil**

The following oil is also recommended if above preferred oil is not available:

- **Low Viscosity Hy-Gard J20D Oil**
- **BIO-Hy-Gard when a biodegradable transmission/hydraulic oil is required**

IMPORTANT: Avoid damage! If operating temperatures are below -18°C (0°F), you must use Low Viscosity HY-GARD® or transmission damage will occur.

SPECIFICATIONS & INFORMATION COOLANT SPECIFICATIONS

Use the appropriate oil viscosity based on the air temperature ranges. Operating outside of these recommended oil air temperature ranges may cause premature gear case failure.

John Deere Dealers: You may want to cross-reference the following publications to recommend the proper oil for your customers:

- Module DX, ENOIL2 in JDS-G135;
- Section 530, Lubricants & Hydraulics, of the John Deere Merchandise Sales Guide;
- Lubrication Sales Manual PI7032.

Coolant Specifications

Engine Coolant

The engine cooling system, when filled with a proper dilution mixture of anti-freeze and deionized or distilled water, provides year-round protection against corrosion, cylinder or liner pitting, and winter freeze protection down to -37°C (-34°F).

The following John Deere coolant is **PREFERRED**:

- **PRE-DILUTED DIESEL ENGINE ANTI-FREEZE/SUMMER COOLANT™** (TY16036).

This coolant satisfies specifications for “Automobile and Light Duty Engine Service” and is safe for use in John Deere Lawn and Grounds Care/Golf and Turf Division equipment, including aluminum block gasoline engines and cooling systems.

The above preferred pre-diluted anti-freeze provides:

- adequate heat transfer
- corrosion-resistant chemicals for the cooling system
- compatibility with cooling system hose and seal material
- protection during extreme cold and extreme hot weather operations
- chemically pure water for better service life
- compliance with ASTM D4656 (JDM H24C2) specifications

If above preferred pre-diluted coolant is not available, the following John Deere concentrate is **recommended**:

- **DIESEL ENGINE ANTI-FREEZE/SUMMER COOLANT CONCENTRATE™** (TY16034).

If either of above recommended engine coolants are not available use any Automobile and Light Duty Engine Service **ethylene glycol base coolant**, meeting the following specification:

- ASTM D3306 (JDM H24C1).

Read container label completely before using and follow

instructions as stated.

IMPORTANT: Avoid damage! To prevent engine damage, DO NOT use pure anti-freeze or less than a 50% anti-freeze mixture in the cooling system. DO NOT mix or add any additives/conditioners to the cooling system in Lawn and Grounds Care/Golf and Turf Division equipment. Water used to dilute engine coolant concentrate must be of high quality—clean, clear, potable water (low in chloride and hardness—Table 1) is generally acceptable. DO NOT use salt water. Deionized or distilled water is ideal to use. Coolant that is not mixed to these specified levels and water purity can cause excessive scale, sludge deposits, and increased corrosion potential.

Property	Requirements
Total Solids, Maximum	340 ppm (20 grns/gal)
Total Hardness, Max.	170 ppm (10 grns/gal)
Chloride (as Cl), Max.	40 ppm (2.5 grns/gal)
Sulfate (as SO_4), Max.	100 ppm (5.8 grns/gal)

Mix 50 percent anti-freeze concentrate with 50 percent distilled or deionized water. This mixture and the prediluted mixture (TY16036) will protect the cooling system down to -37°C (-34°F) and up to 108°C (226°F).

Certain geographical areas may require lower air temperature protection. See the label on your anti-freeze container or consult your John Deere dealer to obtain the latest information and recommendations.

Engine Coolant Drain Interval

When using **John Deere Pre-Diluted (TY16036)** Automobile and Light Duty Engine Service coolants, drain and flush the cooling system and refill with fresh coolant mixture every **36 months or 3,000 hours** of operation, whichever comes first.


When using **John Deere Concentrate (TY16034)** Automobile and Light Duty Engine Service coolants, drain and flush the cooling system and refill with fresh coolant mixture every **24 months or 2,000 hours** of operation, whichever comes first.

If above John Deere Automobile and Light Duty Engine Service coolants **are not** being used, drain, flush, and refill the cooling system according to instructions found on product container or in equipment operator's manual or technical manual.

Serial Number Locations

Machine Product Identification Number


When ordering parts or submitting a warranty claim, it is **IMPORTANT** that the machine product identification number (PIN) and component serial numbers are included. The location of the PIN and component serial numbers are shown.

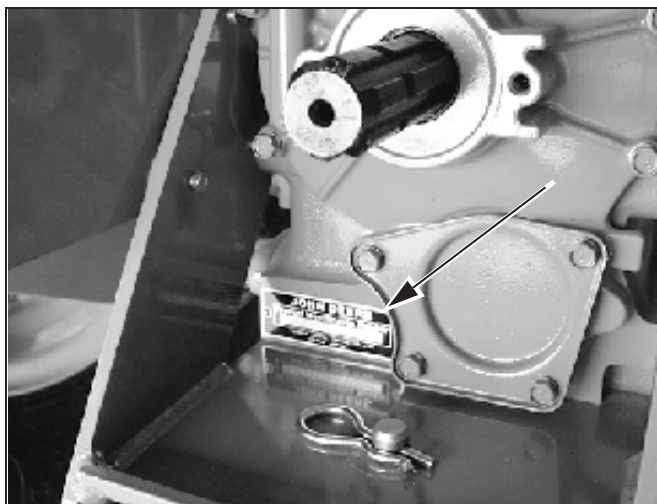

MX1032

Located on rear of machine.

Engine Serial Number

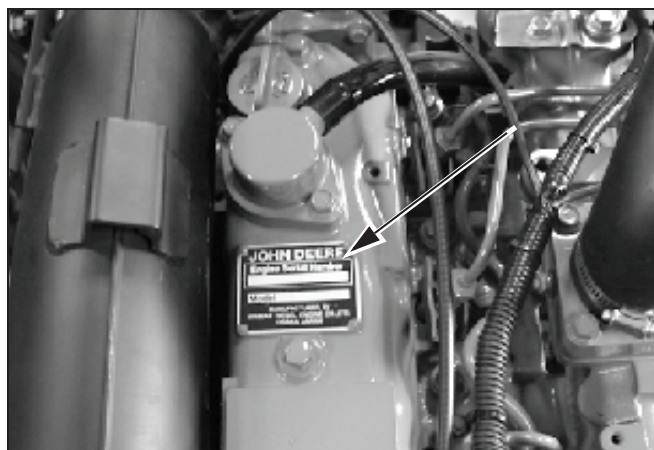

MX1033

Located on top of engine.

ENGINE - DIESEL TABLE OF CONTENTS

Table of Contents

Specifications	23
General Specifications	23
Repair Specifications.....	23
Tests and Adjustment Specifications	27
Operational Tests	27
Torque Values, Non-Standard Fasteners.....	27
Special Tools.....	28
Other Materials.....	29
Theory of Operation	30
Cooling System Operation	30
Lubrication System Operation	31
Fuel and Air System Operation - 4TNE.....	32
Fuel and Air System Operation - 4TNV.....	33
Diagnostics	34
Engine Troubleshooting	34
Diagnostic Table.....	40
Tests and Adjustments	42
Throttle Rod Adjustment.....	42
Cylinder Compression Test	42
Slow Idle Adjustment.....	43
Valve Clearance Check and Adjustment.....	44
Connecting Rod Side Play Check	44
Connecting Rod Bearing Clearance Check..	45
Crankshaft End Play Check	46
Crankshaft Main Bearing Clearance Check ..	46
Valve Lift Check	47
Camshaft End Play Check	47
Timing Gear Backlash Check.....	48
Fuel Injection Nozzle Test.....	48
Injection Pump Static Timing Adjustment - 4TNE	50
Injection Pump Static Timing Adjustment - 4TNV	52
Fan/Alternator Drive Belt Adjustment	52
Thermostat Opening Test.....	53
Radiator Bubble Test.....	53
Cooling System Pressure Test.....	54
Radiator Cap Pressure Test.....	54
Engine Oil Pressure Test	54
Fuel Supply Pump Pressure Test - 4TNE ...	55
Fuel Supply Pump Pressure Test - 4TNV ...	56
Fuel System Leakage Test.....	56
Bleed Fuel System	56

Repair	57
Engine Removal - 4TNE	57
Rocker Cover - 4TNE	58
Rocker Cover - 4TNV	59
Exhaust Manifold - 4TNE.....	59
Exhaust Manifold - 4TNV	60
Intake Manifold	60
Rocker Arm Assembly	60
Cylinder Head and Valves	62
Piston and Connecting Rod.....	67
Cylinder Bore	72
Crankcase Extension Housing.....	74
Balancer Assembly	74
Crankshaft Rear Oil Seal	75
Crankshaft Front Oil Seal	76
Crankshaft and Main Bearings	77
Flywheel.....	79
Camshaft	79
Cam Followers.....	82
Timing Gear Cover	84
Idle Gear.....	85
Timing Gear Cover Mounting Plate	85
Oil Pan and Strainer	86
Oil Pump - 4TNE.....	86
Oil Pump 4TNV	87
Thermostat and Water Pump Disassembly ..	90
Fuel Supply Component Location - 4TNE84	91
Fuel Injection Pump - 4TNE84.....	92
Fuel Supply Component Location - 4TNV84	94
Fuel Injection Pump 4TNV.....	95
Fuel Injection Nozzles.....	97
Fuel Filter Assembly	100
Secondary Fuel Filter 4TNV	100
Starting Motor Removal and Installation....	100
Alternator Removal and Installation.....	101

ENGINE - DIESEL TABLE OF CONTENTS



ENGINE - DIESEL SPECIFICATIONS

Specifications

General Specifications

Engines for 2004 model year are 4TNV84. Previous models are 4TNE84. Most specifications are common to both models. Specifications that are not the same between models are noted.

Make	Yanmar
Model	4TNE84-EJKM or 4TNV84-LJNT
Type	4-Cycle Diesel
Gross Power 4TNE84 (for reference only)	30.1 kW (40.4 hp)
Gross Power 4TNV84 (for reference only)	30.7 kW (41.2 hp)
PTO Horsepower $\pm$ 5%	26.1 kW (35 hp)
Number of Cylinders	4
Bore	84 mm (3.31 in.)
Stroke	90 mm (3.54 in.)
Displacement	1.995 L (121.7 cu in.)
Firing Order	1 - 3 - 4 - 2
Direction of Rotation	Counterclockwise (viewed from flywheel)
Combustion System	Direct Injection Type
Compression Ratio	18.0 to 1
Cooling	Liquid
Cooling Capacity	5.8 L (6.1 qt)
Oil Capacity	Approximately 5.3 L (5.6 qt)
Governor	Centrifugal
Slow Idle	1000 rpm
Rated Speed	2700 rpm

Repair Specifications

Valve Train:

Rocker Arm Shaft OD	15.97 - 15.98 mm (0.628 - 0.629 in.)
Rocker Arm Shaft Wear Limit	15.94 mm (0.6276 in.)
Rocker Arm ID	16.00 - 16.02 mm (0.630 - 0.631 in.)
Wear Limit	16.07 mm (0.633 in.)
Oil Clearance	0.02 - 0.05 mm (0.001 - 0.002 in.)
Wear Limit	0.14 mm (0.006 in.)
Push Rod Bend	0.0 - 0.03 mm (0.0 - 0.001 in.)

Cylinder Head and Valves:

Cylinder Head Distortion	0.0 - 0.05 mm (0.0 - 0.002 in.)
Wear Limit	0.15 mm (0.006 in.)
Intake Valve Seat Width	1.07 - 1.24 mm (0.042 - 0.049 in.)
Wear Limit	1.74 mm (0.069 in.)
Exhaust Valve Seat Width	1.24 - 1.45 mm (0.049 - 0.057 in.)

ENGINE - DIESEL SPECIFICATIONS

Wear Limit	1.94 mm (0.076 in.)
Intake and Exhaust Valve Stem OD 4TNE	7.96 - 8.025 mm (0.313 - 0.316 in.)
Intake Valve Stem OD 4TNV	7.955 - 7.975 mm (0.312 - 0.314 in.)
Exhaust Valve Stem OD 4TNV	7.955 - 7.97 mm (0.312 - 0.313 in.)
Wear Limit	7.9 mm (0.311 in.)
Valve Head Thickness: Intake	1.24 - 1.44 mm (0.049 - 0.057 in.)
Valve Head Thickness: Exhaust	1.35 - 1.55 mm (0.053 - 0.061 in.)
Wear Limit	0.50 mm (0.020 in.)
Valve Recession	0.31 - 0.51 mm (0.012 - 0.020 in.)
Wear Limit	1.00 mm (0.039 in.)
Valve Guide Stem-To-Guide Oil Clearance: Intake	0.04 - 0.07 mm (0.001 - 0.003 in.)
Exhaust	0.05 - 0.08 mm (0.002 - 0.003 in.)
Wear Limit	0.20 mm (0.008 in.)
Valve Guide ID.	8.01 - 8.03 mm (0.315 - 0.316 in.)
Wear Limit	8.10 mm (0.319 in.)
Valve Guide Projection.	14.7 - 15 mm (0.579 - 0.591 in.)
Valve Spring Free Length	42.0 mm (1.654 in.)
Maximum Spring Inclination 4TNE	1.10 mm (0.044 in.)
Maximum Spring Inclination 4TNV	1.4 mm (0.055 in.)
Valve Spring Tension (Measured With Spring Compressed 1.0 mm (0.039 in.):	2.36 - 3.10 kg (5.20 - 6.83 lb)
Valve Seat Surface Angle: Exhaust Valve	45°
Valve Seat Surface Angle: Intake Valve	30°
Valve Timing: Intake Valve Opens.	10° - 20° BTDC
Intake Valve Closes	40° - 50° ABDC
Exhaust Valve Opens	51° - 61° BBDC
Exhaust Valve Closes.	13° - 23° ATDC
Piston-to-Cylinder Head Clearance	0.66 - 0.78 mm (0.026 - 0.031 in.)
Connecting Rod	
Connecting Rod Side Play.	0.2 - 0.4 mm (0.008 - 0.016 in.)
Large End Bearing ID.	47.952 - 47.962 mm (1.887 - 1.888 in.)
Piston Pin Bushing ID	26.025 - 26.038 mm (1.024 - 1.025 in.)
Oil Clearance.	0.04 - 0.07 mm (0.002 - 0.003 in.)
Piston Rings	
First Compression Piston Ring Groove Width	2.07 - 2.08 mm (0.081 - 0.082 in.)
First Compression Piston Ring Width	1.97 - 1.99 mm (0.078 - 0.078 in.)
First Compression Ring Minimum Side Clearance	0.08 - 0.11 mm (0.003 - 0.004 in.)
Second Compression Piston Ring Groove Width	2.04 - 2.05 mm (0.080 - 0.081 in.)
Second Compression Piston Ring Width.	1.97 - 1.99 mm (0.078 - 0.078 in.)
Second Compression Piston Ring Minimum Side Clearance	0.05 - 0.08 mm (0.002 - 0.003 in.)
Oil Control Piston Ring Groove Width	4.02 - 4.03 mm (0.158 - 0.159 in.)
Oil Control Piston Ring Width	3.97 - 3.99 mm (0.156 - 0.157 in.)

ENGINE - DIESEL SPECIFICATIONS

Oil Control Piston Ring Minimum Side Clearance	0.03 - 0.06 mm (0.001 - 0.002 in.)
Piston Ring End Gap	0.20 - 0.40 mm (0.008 - 0.016 in.)
Wear Limit	0.50 mm (0.019 in.)

Piston Pin

Piston Pin OD	25.99 - 26.00 mm (1.023 - 1.024 in.)
Wear Limit	25.90 mm (1.020 in.)
Piston Pin Bushing ID	26.00 - 26.01 mm (1.024 - 1.024 in.)
Wear Limit	26.02 mm (1.024 in.)
Piston Pin-To-Rod Bore Oil Clearance	0.03 - 0.05 mm (0.001 - 0.002 in.)
Wear Limit	0.2 mm (0.008 in.)
Piston Pin-To-Piston Oil Clearance (All)	0.00 - 0.014 mm (0.0 - 0.001 in.)
Wear Limit	0.074 mm (0.003 in.)

Piston

Standard Piston OD	83.95 - 83.98 mm (3.305 - 3.306 in.)
Wear Limit	83.90 mm (3.303 in.)
Oversize Piston OD	84.20 - 84.23 mm (3.315 - 3.316 in.)
Wear Limit	84.15 mm (3.313 in.)

Cylinder Bore ID

Standard Bore ID	84.00 - 84.03 mm (3.307 - 3.308 in.)
Wear Limit	84.20 mm (3.315 in.)
Oversize Bore ID	84.25 - 84.28 mm (3.317 - 3.318 in.)
Wear Limit	84.45 mm (3.325 in.)
Piston-to-Cylinder Clearance	0.040 - 0.070 mm (0.0016 - 0.0027 in.)
Cylinder Roundness	0.00 - 0.01 mm (0 - 0.0004 in.)
Wear Limit	0.03 mm (0.001 in.)
Cylinder Taper	0.00 - 0.01 mm (0 - 0.0004 in.)
Wear Limit	0.03 mm (0.001 in.)
Deglazing	30 - 40° crosshatch pattern

Crankshaft and Main Bearings

Connecting Rod Journal OD	47.95 - 47.96 mm (1.888 - 1.888 in.)
Wear Limit	47.91 mm (1.886 in.)
Main Bearing Journal OD	53.95 - 53.96 mm (2.124 - 2.124 in.)
Wear Limit	53.91 mm (2.122 in.)
Main Bearing Oil Clearance	0.04 - 0.07 mm (0.001 - 0.003 in.)
Wear Limit	0.15 mm (0.006 in.)
Crankshaft Bend (Maximum)	0.02 mm (0.001 in.)
Crankshaft End Play 4TNE	0.09 - 0.27 mm (0.004 - 0.011 in.)
Crankshaft End Play 4TNV	0.13 - 0.23 mm (0.005 - 0.09 in.)
Wear Limit	0.33 mm (0.013 in.)

Camshaft

ENGINE - DIESEL SPECIFICATIONS

Camshaft End Play	0.05 - 0.25 mm (0.002 - 0.010 in.)
Camshaft Bend	0 - 0.02 mm (0 - 0.001 in.)
Wear Limit	0.05 mm (0.002 in.)
Lobe Height (Intake and Exhaust) 4TNE	38.64 - 38.77 mm (1.521 - 1.526 in.)
Lobe Height (Intake and Exhaust) 4TNV	38.6 - 38.8 mm (1.519 - 1.527 in.)
Wear Limit 4TNE	38.40 mm (1.512 in.)
Wear Limit 4TNV	38.35 mm (1.509 in.)
Bearing Journal OD: Flywheel Side and Gear Side.	44.925 - 44.95 mm (1.768 - 1.770 in.)
Intermediate Journal	44.91 - 44.94 mm (1.768 - 1.769 in.)
Wear Limit	44.88 mm (1.767 in.)
Oil Clearance (Gear and Flywheel Ends)	0.04 - 0.13 mm (0.002 - 0.005 in.)
Oil Clearance (Intermediate)	0.07 - 0.12 mm (0.003 - 0.005 in.)

Camshaft Followers

Stem OD	11.98 - 11.99 mm (0.471 - 0.472 in.)
Wear Limit	11.93 mm (0.470 in.)
Bore ID	12.00 - 12.02 mm (0.472 - 0.473 in.)
Wear Limit	12.05 mm (0.474 in.)
Oil Clearance	0.01 - 0.04 mm (0.0004 - 0.0016 in.)
Wear Limit	0.12 mm (0.005 in.)

Idler Gear

Shaft OD	45.95 - 45.98 mm (1.809 - 1.810 in.)
Wear Limit	45.93 mm (1.808 in.)
Bushing ID	46.00 - 46.03 mm (1.811 - 1.812 in.)
Wear Limit	46.08 mm (1.814 in.)
Clearance Limit	0.175 mm (0.007 in.)

Oil Pump 4TNE

Rotor Shaft OD to Side Cover Hole ID Clearance	0.01 - 0.04 mm (0.001 - 0.002 in.)
Wear Limit	0.20 mm (0.08 in.)
Inner Rotor and Outer Rotor-to-Pump Body Side Clearance	0.03 - 0.09 mm (0.001 - 0.004 in.)
Wear Limit	0.15 mm (0.006 in.)
Outer Rotor to Pump Body Clearance	0.10 - 0.16 mm (0.004 - 0.006 in.)
Wear Limit	0.25 mm (0.010 in.)
Inner Rotor to Outer Rotor Clearance Wear Limit	0.15 mm (0.006 in.)

Oil Pump 4TNV

Inner Rotor and Outer Rotor-to-Pump Body Side Clearance	0.02 - 0.07 mm (0.0007 - 0.0027 in.)
Wear Limit	0.12 mm (0.0047 in.)
Outer Rotor to Pump Body Clearance	0.12 - 0.21 mm (0.0047 - 0.0082 in.)
Wear Limit	0.30 mm (0.0118 in.)
Inner Rotor to Outer Rotor Clearance Wear Limit	0.16 mm (0.006 in.)

This as a preview PDF file from **best-manuals.com**



Download full PDF manual at **best-manuals.com**