

## W9, W9A, W10, AND W12 LOADERS TABLE OF CONTENTS

SERIES/SECTION	SECTION NO.	FORM NO.
10 SERIES - GENERAL		
Specifications for W9 and W9A Engines . . . . .	C	9-74563
Specifications for W10 and W12 Engines . . . . .	CC	9-74562
20 SERIES - ENGINE		
Cylinder Heads, Valve Systems, Rocker Arms, Decompressor on Diesel Engines . . . . .	K	9-76972
Cylinder Heads, Valve Systems, Rocker Arms on Spark Ignition Engines . . . . .	L	9-76962
Assemblies Contained in Engine Block . . . . .	M	9-75222
Engine Counter Balancer . . . . .	MM	9-76731
Water Pump . . . . .	3M	9-76741
Spark Ignition Governor . . . . .	4M	9-76751
Governor Linkage . . . . .	None	9-75711
30 SERIES - FUEL SYSTEM		
Fuel Injectors, Fuel Injection Pump . . . . .	I	9-75421
TSX Series Gasoline Carburetor . . . . .	N	9-75771
40 SERIES - HYDRAULICS		
Relief Valve Pressure Setting . . . . .	None	9-74562
Hydraulic Cylinders . . . . .	A	9-76621
"H" Series Gear Type Hydraulic Pump . . . . .	B	9-74562
VDP-4 and VY-5 Hydraulic Control Valves . . . . .	D	9-74562
Relief Valve and Lift Spool on VY-5 Hydraulic Control Valve . . . . .	D, Supp't 1	9-74562
VDP-14 Hydraulic Control Valve . . . . .	DD	9-74561
Model 32 Backhoe . . . . .	3D	9-75091
50 SERIES - STEERING		
Combined Unit Power Steering Valve and Gear Box, Steering Linkage, Power Steering Cylinder (W9 and W9A) . . . . .	O	9-74561
Gear and Roll Type Power Steering Pumps . . . . .	P	9-74561
Combined Unit Power Steering Cylinder and Valve, Steering Linkage, Steering Gear Box (W10 and W12) . . . . .	Q	9-74563
60 SERIES - POWER TRAIN		
Model CRT 3331-1 Allison Torqmatic Transmission . . .	None	SA1073
Single Reduction Differentials, Universal Joints, Drive Shafts . . . . .	T	9-74561
Planetaries and Axles . . . . .	U	9-74561

SERIES/SECTION

SECTION NO.

FORM NO.

70	SERIES - BRAKES		
	Series "01" Hydraulic Brake Cylinder, Brake Shoes and Drums (W9, W9A) . . . . .	W	9-74562
	Power Assist Hydraulic Brake Valve, Brake Shoes and Drums (W10 and W12) . . . . .	WW	9-74562
	Hydrovac Brake System . . . . .	3W	9-74563
80	SERIES - ELECTRICAL		
	Wiring Diagrams		
	W9 Gasoline Electrical Systems . . . . .	None	9-76701
	W9A Gasoline Electrical Systems . . . . .	None	9-76711
	W10, W12 Diesel Electrical Systems . . . . .	None	9-76691
	Electrical System, Cranking Circuit, Charging Circuit (24-volt Alternator) . . . . .	F	9-75202
	Electrical System . . . . .	3F	9-76721

# SECTION

# C

## SPECIFICATIONS FOR CASE

**W7 - A284 GASOLINE ENGINE**

**W7 - A301 DIESEL ENGINE**

**W9 - A251 GASOLINE ENGINE**

**W9 - A267 DIESEL ENGINE**

**W9A - A284 GASOLINE ENGINE**

**W9A - A301 DIESEL ENGINE**

**The Specifications Listed are The Same Unless Otherwise Indicated**

**C-6**

Crankshaft End Play (Measured At Center Main Bearing) ----- .004 to .012 Inch; Install New Thrust Washers if End Play Exceeds .020 Inch

Oversize Thrust Washers for End Play Available for Service----- .006 Inch

Connecting Rod Bearing Journal Diameter ----- 2.748 to 2.749 Inches

Main Bearing Journal Diameter ----- 2.998 to 2.999 Inches

Crankshaft Main and Connecting Rod Journal Bearing Out of Round -----Maximum .001 Inch

Inside Diameter of Main Bearing Liners (In Place and Capscrews Tight)----- 3.0006 to 3.0026 Inches

Clearance Between Main Bearing Liner and Journal----- .0020 to .0046 Inch; Install New Bearing Liner when Clearance Exceeds .0065 Inches.

Width of 1st, 3rd and 5th Main Bearing Liners ----- 2.218 Inches

Width of 2nd and 4th Main Bearing Liners ----- 1.156 Inches

Width Between Crankshaft Main Bearing Cheeks:  
A. 5th ----- 2.620 to 2.630 Inches

B. 2nd and 4th ----- 1.5575 to 1.5675 Inches

C. 3rd (Center)----- 2.624 to 2.626 Inches

Width Between Crankshaft Rod Bearing Journal Cheeks -----1.9975 to 2.0025 Inches

Undersize Main Bearing Liners Available for Service----- .002, .010, .020, .030 Inch

Crankshaft Main Bearing Journals should be ground to----- 2.988-2.989 Inches for .010 Inch Undersize Bearing  
2.978-2.979 Inches for .020 Inch Undersize Bearing  
2.968-2.969 Inches for .030 Inch Undersize Bearing

Undersize Connecting Rod Bearing Shells Available for Service----- .002, .010, .020, .030 Inch

Connecting Rod Crankshaft Journals Should be ground to----- 2.738-2.739 Inches for .010 Inch Undersize Bearing  
2.728-2.729 Inches for .020 Inch Undersize Bearing  
2.718-2.719 Inches for .030 Inch Undersize Bearing

**CAMSHAFT AND BUSHINGS**

Number of Bearing Surfaces on Camshaft -----4

Type Bushing ----- Replaceable, Precision, Steel Backed Babbitt

Bushing Lubrication ---- Pressure Lubricated from Oil Pump; Camshaft Drilled to Provide Pressure Lubrication to Valve Rocker Arm Assembly, and to Timing Gear Train.

Diameter of Camshaft at Each Bearing Surface ----- 2.246 to 2.247 Inches

Inside Diameter of Each Bushing (Measured when in Place in Block) ----- 2.2484 to 2.2514 Inches

No. 1 (Front) Bushing Length ----- 1.656 Inches

No. 2., and 3 Bushing Lengths ----- 1.438 Inches

No. 4 Bushing Length ----- 1.156 Inches

Camshaft End Play----- Automatically Taken up by Spring Loaded Thrust Button in Front End of Camshaft. Bronze Washer Provided Between Drive Gear and Front Bearing.

**Camshaft Washer**

Outside Diameter ----- 3.240 to 3.260 Inches

Inside Diameter----- 2.250 to 2.260 Inches

Thickness----- .1225 to .1275 Inch

**VALVE PUSH ROD LIFTERS**

Type ----- Mushroom Type

Outside Diameter of End That Projects into Block ----- .8097 to .8102 Inches

Diameter of Bore in Block for Lifter ----- .8115 to .8130 Inches

Oversize Lifter Available for Service ----- .010 Inch Oversize Lifter

Bore in Block Must be Reamed to ----- .8215 to .8225 Inch for .010 Inch Oversize Lifter.

**VALVES****Valve Tappet Clearance**

Intake ----- .015 Inch, Engine Cold  
Exhaust ----- .025 Inch, Engine Cold

**Exhaust Valves**

Angle of Valve Face-----44 Degrees

Valve Length  
A251 ----- 6.537 Inches  
A284 ----- 6.604 Inches

Maximum Valve Face Runout ----- .002 Inch as Determined with a Dial Indicator.

Diameter of Valve Stem ----- .400 to .401 Inch; Install New Valve if there is More Than .002 Inch Difference in Diameter at any Point on Stem.

Diameter of Valve Head  
A251 ----- 1.545 Inches  
A284 ----- 1.676 Inches

Inside Diameter of Valve Guide----- .4045 to .4055 Inch

Valve Stem Clearance in Guide----- .0035 to .0055 Inch

Valve Rotators ----- Positive Type

**Exhaust Valve Seat Insert**

Seat Angle ----- 45 Degrees

Seat Width ----- .073 to .084

Insert Height ----- .250 to .255 Inch

Outside Diameter of Insert  
A251 ----- 1.630 to 1.631 Inches  
A284 ----- 1.761 to 1.762 Inches

Inside Diameter of Insert  
A251 ----- 1.370 to 1.380 Inches  
A284 ----- 1.501 to 1.511 Inches

Maximum Allowable Seat Runout ----- .002 Inch as Determined with a Dial Indicator.

**Intake Valves**

Angle of Valve Face----- 44 Degrees

Valve Length  
A251 ----- 6.695 Inches  
A284 ----- 6.593 Inches

Maximum Valve Face Runout ----- .002 Inch as Determined With a Dial Indicator.

Diameter of Valve Stem ----- .402 to .403 Inch; Install New Valve if there is More than .002 Inch Difference in Diameter at any Point on Stem.

Diameter of Valve Head  
A251 ----- 1.720 Inches  
A284 ----- 1.825 Inches

Inside Diameter of Valve Guide --- .4045 to .4055 Inch (After Assembly)

Stem Clearance in Guide ----- .0015 to .0035 Inch

**Intake Valve Seat**

Seat Angle ----- 45 Degrees

Seat Width ----- .070 to .086 Inch

**Exhaust Valve Guides**

Length ----- 3.625 Inches

Outside Diameter ----- .7510 to .7515 Inch

Inside Diameter ----- .4045 to .4055 Inch

Valve Stem Clearance in Guide----- .0035 to .0055 Inch

Distance Above Head Guide Must Protrude ----- 1.062 Inch Press Fit

**Intake Valve Guides**

Length ----- 3.625 Inches

Outside Diameter ----- .7510 to .7515 Inch

Inside Diameter ----- .4045 to .4055 Inch

Valve Stem Clearance in Guide ----- .0015 to .0035 Inch

Distance Above Head Guide Must Protrude ----- 1.062 Inch Press Fit

**VALVE SPRINGS**

Free Length ----- Approx. 2.438 Inches

Spring Pressure at Compressed Height of 1.531 Inches(Valve Open)----- 95.5 Pounds; Install New Spring if Pressure is Less Than 86 Pounds.

Spring Pressure at Compressed Height of 1.938 Inches(Valve Closed) ----- 45 Pounds; Install New Spring if Pressure is Less Than 41 Pounds.

**ROCKER ARM ASSEMBLY**

Rocker Arm Bushings ----- Replaceable Precision Bronze Bushing

Number of Bushings -----8

Lubrication ----- Pressure Lubricated; Crankcase Oil to Rocker Arms Metered by Camshaft.

Oil Holes in Rocker Arm Shaft ----Oil Holes Must Face Push Rod Side of Engine Only. Shaft Cannot Be Rotated.

Positioning of Exhaust Valve Rocker Arms -----Spacer Washers Position Exhaust Valve Rocker Arm and Eliminates End Play Without Binding.

Outside Diameter of Rocker Arm Shaft----- .872 to .873 Inch

Inside Diameter of Rocker Arm Bushing-----.8745 to .8755 Inch

Rocker Arm Shaft Spring Spring Pressure at Compressed Height of 1.562 -----10 Pounds;Install New Spring if Pressure is Less than 8.500 Pounds

**OIL PUMP**

Type ----- Positive Displacement, Gear Type Pump Driven off Camshaft.

Pressure Relief Valve ----- Maintains 40 to 45 Pounds Full Pressure (Oil Warm, Engine Operating at Full Governed Speed) Relief Valve is Adjustable.

**WATER PUMP AND THERMOSTAT**

Type of System -----Pressurized Thermostat Continuous By-Pass Type;Forced Circulation (Pump).

Type Pump ----- Impeller Vane Type

Temperature Control----- By-Pass Type Thermostat

**FUEL SYSTEM Gasoline**

Type of System ----- Gravity Flow

Flange ----- SAE 1.250 Inch

Load Jet ----- Adjustable

**TIGHTENING TORQUE SPECIFICATIONS**

Engine	Torque in Ft. Lbs.	Size	Threads per in.	Type
Camshaft Nut -----	125	1-1/8	12	NF*
Connecting Rod Bearing Capscrews-----	95 to 105	1/2	20	NF
Crankshaft Pulley Bolt----	100	5/8	18	NF
Cylinder Head Cover (Valve Cover)Stud Nuts----	5 Max	7/16	20	NF
Cylinder Head Bolts (Grade 8)-----	145 to 150	9/16	18	NF
Flywheel to Crankshaft Capscrews -----	100	5/8 9/16	18 18	NF NF
Crankshaft Rear Oil Seal Retainer Capscrews-----	25	3/8	16	NC**
Generator Mounting Capscrews -----	15	5/16	18	NC
Injectors, Diesel Fuel Clamp Stud Nuts, Injector to Cylinder Head (Diesel)-----	14 to 17	3/8	24	NF
Injector Nozzle Cap Nut (Diesel) -----	50 to 55			
Powrcel Clamp Screws (Diesel)-----	100	1-1/8	16	NC
Mainbearing Capscrews--	145 to 155	5/8	11	NC
Manifolds				
Manifold Clamp Stud Nuts -----	25	7/16	20	NF
Water Manifold Hold Down Capscrews-----	15	5/16	18	NC
Oil Filter Mounting Capscrews-----	25	3/8	16	NC
Oil Pan Capscrews-----	40	3/8	16	NC
Oil Pump Cover Capscrews-----	25	1/4	20	NC
Rocker Arm Bracket Studs and Capscrews -----	40	7/16	14	NC
Water Pump and Fan Shaft Nut -----	60	5/8	18	NF
Water Pump Mounting Capscrews -----	25	3/8	16	NC
Maximum Backlash at Tighest Point(All Timing Gears)-----				.002 to .005 Inch
Maximum Backlash at Loolest Point(All Timing Gears)-----				.006 Inch

National Fine\*  
National Coarse\*\*

Maximum Allowable  
Seat Runout----- .002 Inch as  
Determined with a Dial Indicator

### Exhaust Valve Guides

Length ----- 3.218 Inches  
Outside Diameter----- .7510 to .7515 Inch  
Inside Diameter ----- .4045 to .4055 Inch.(After Assembly)  
Valve Stem Clearance in Guide ----- .0035 to .0055 Inch  
Distance Above Head Guide Must Protrude ----- 1.062 Inches, Press Fit

### Intake Valve Guides

Length ----- 4.375 Inches  
Outside Diameter ----- .7510 to .7515 Inch  
Inside Diameter ----- .4045 to .4055 Inch.(After Assembly)  
Valve Stem Clearance in Guide ----- .0015 to .0035 Inch  
Distance Above Head  
Guide Must Protrude -----1.062 Inches, Press Fit

### VALVE SPRINGS

Free Length ----- Approximately 2.438 Inches  
Spring Pressure at Compressed Height of  
1.484 Inches(Valve Open)----- 102 Pounds; Install New Spring if  
Pressure is Less than 92 Pounds.  
Spring Pressure at Compressed Height of  
1.937 Inches(Valve Closed)----- 45 Pounds; Install New Spring if  
Pressure is Less than 41 Pounds.

### ROCKER ARM ASSEMBLY

Rocker Arm Bushing----- Replaceable Precision Bronze Bushing  
Number of Bushings ----- 8  
Lubrication----- Pressure Lubricated; Crankcase Oil to  
Rocker Arms Metered by Camshaft.  
Oil Holes in Rocker Arm Shaft ----- Oil Holes must Face Push Rod  
Side of Engine Only. Shaft Cannot Be Rotated.  
Positioning of Exhaust  
Valve Rocker Arms----- Spacer Washers Position Exhaust Valve  
Rocker Arm and Eliminate End Play without  
Binding.

Outside Diameter of  
Rocker Arm Shaft----- .872 to .873 Inch  
Inside Diameter of Rocker  
Arm Bushing (Installed)----- .8745 to .8755 Inch  
Rocker Arm Shaft Spring

Spring Pressure at Compressed Height of  
1.562 Inches ----- 10 Pounds; Install  
New Spring If Pressure is Less than 8.5 Pounds.

### OIL PUMP

Type ----- Positive Displacement, Gear Type Pump;  
Driven Off Balancer.  
Pressure Relief Valve----- Maintains 40 to 45 Pounds Full Pres-  
sure(Oil Warm, Engine Operating at Full Gov-  
erned Speed) Relief Valve is Adjustable.

### WATER PUMP AND THERMOSTAT

Type of System ----- Pressurized Thermostat - Continuous  
By-Pass Type; Forced Circulation (Pump).  
Type Pump ----- Impeller Vane Type  
Radiator----- Heavy Duty Fin and Tube Type  
Temperature Control ----- By Pass Type Thermostat

### FUEL SYSTEM

Injection Pump----- Robert Bosch, Type PES Multiple Plunger Pump  
Direction of Pump Rotation----- Counter-Clockwise

Pump Mounting----- Right Hand Side of Engine

Pump Drive----- Gear Driven from Camshaft Gear at Camshaft Speed

Injection Pump Drive Lubrication----- Pressure Lubricated From  
Front Camshaft Bearing.

Injection Pump Drive Shaft Diameter ----- 1.3700 to 1.3705 Inches

Normal Clearance Between  
Drive Shaft and Bushings ----- .001 to .002 Inch

Number of Drive  
Shaft Bushings ----- 2- These Bushings are Not Re-  
placeable. A Replacement Drive Housing with  
Bushings in Place, Aligned and Fine Bored is  
Provided.

Injection Pump Drive  
Shaft End Play----- Automatically Take Up By a Spring  
Loaded Thrust Button on Front End of Drive  
Shaft.  
Thrust Washers Provided Between Front Drive  
Gear and Drive Shaft Housing.

Thrust Washer

Outside Diameter ----- 2.085 to 2.105 Inches

Inside Diameter----- 1.3725 to 1.3825 Inches

Thickness ----- .1225 to .1275 Inch

Timing Marks on Engine ----- Timing Marks Located on Crankshaft  
Pulley Flange (0 through 5 and 20 through 35  
Degrees Before Top Dead Center). Pointer  
Located on Timing Gear Cover.

Fuel Injectors----- Robert Bosch Pintle Type; Opening Pressure  
1950 to 2100 Pounds Per Square Inch.

Governor ----- Mechanical Variable Speed Fly-Weight Centrifugal  
Type; Integral Part of Injection Pump.

Fuel Filters

Fuel Tank Breather----- Fuel Tank Cap

Fuel Tank Water Trap ----- Located in Base of Fuel Tank

1st Stage Fuel Filter ----- Replaceable Element Type

2nd Stage Fuel Filter ----- Replaceable Element Type

Final Fuel Filter----- Replaceable Sealed "Can" Type Filter.

**A251 AND A284 ENGINE SPECIFICATIONS**  
Gasoline and LP Gas

Type ----- CASE 4 Cylinder, 4 Stroke Cycle, Valve-  
In-Head Engine.

Cylinder Heads----- Multiple Cylinder Heads can be removed  
individually for Servicing (2 Cylinders per  
Head).

Firing Order ----- 1-3-4-2

Bore  
A251 ----- 4 Inches  
A284 ----- 4-1/4 Inches

Stroke----- 5 Inches

Piston Displacement  
A251-----251 Cubic Inches  
A284 ----- 284 Cubic Inches

Compression Ratio  
A251(Gasoline)----- 7.4 to 1  
(LP Gas)----- 8.5 to 1  
A284(Gasoline) ----- 7.4 to 1  
(LP Gas) ----- 8.5 to 1

Maximum Compression at Cranking Speed (150 RPM)  
Engine Warmed up to Operating Temperature ---- 140 PSI at Sea Level

Allowable Variance Between Cylinders----- 15 Pounds Pressure

Oil Filter, Crankcase-----Replaceable Full Flow Element Type

Ignition----- Distributor

**CYLINDER SLEEVES**

Type ----- Replaceable Wet Type; Two Rubber O-ring  
Seals Carried on each sleeve.

Inside Diameter of Sleeve Bore  
A251----- 4.00 to 4.001 Inches, Replace  
Sleeve when Inside Diameter Below Top Ring  
Ridge Exceeds 4.008 Inches.  
A284 ----- 4.250 to 4.251 Inches. Replace Sleeve  
When Inside Diameter Below Top Ring Ridge  
Exceeds 4.258.

Piston Clearance in Sleeve (At Skirt)----- .0035 to .0045 Inches

**PISTON AND PISTON PINS**

Piston Material----- Aluminum

Piston Weight (Less Pin)  
A251----- 2.205 to 2.214 Pounds  
A284 ----- 2.788 Pounds

Diameter of Piston at Top  
A251----- 3.964 to 3.968 Inches  
A284 ----- 4.215 to 4.219 Inches

Diameter of Piston at Top of Skirt  
(Measured Immediately Below Oil  
Ring, Across Thrust Faces)  
A251 ----- 3.996 to 3.997 Inches  
A284 ----- 4.246 to 4.247 Inches

Piston Pins----- Full Floating Type; Held in Position with Snap  
Rings in Piston; Replaceable Bronze Bushing in  
Connecting Rods.

Piston Pin Length  
A251 ----- 3.395 to 3.405 Inches  
A284 ----- 3.613 to 3.618 Inches

Piston Pin Diameter  
A251 ----- 1.3583 to 1.3586 Inches  
A284 ----- 1.3584 to 1.3585 Inches

Piston Pin Fit in Piston  
A251 ----- .0001 to .0003 Inch  
A284 ----- .0001 to .0004 Inch

Piston Pin Fit in Connecting Rod Bushing  
A251 ----- .0004 to .0011 Inch  
A284 ----- .0005 to .0011 Inch

**PISTON RINGS**

Rings Per Piston----- 4 - (3 Compression and 1 Oil)

Compression Rings (Top 3)

*spark ignition engines*

**C-5**

1st(Top)Ring----- Chromium Plated; Relief Indicates Top Side

2nd and 3rd Rings----- Tapered Face, Top Marked

Width of Rings (All 3)----- .0930 to .0935 Inch

Ring End Gap(All 3) When Compressed  
in 4.000 Inch Cylinder  
A251 ----- .013 to .023 Inch  
Ring End Gap (All 3 ) When Compressed  
in 4.250 Inch Cylinder  
A284 ----- .013 to .025 Inch

Side Clearance in Groove of 1st(top)Ring----- .0025 to .0040 Inch

Side Clearance in Groove of 2nd and 3rd Ring  
A251 ----- .0020 to .0040 Inch  
A284 ----- .0020 to .0035 Inch

Oil Ring----- To install Replacement Ring, Follow  
Instructions Packed with Rings.

Width of Ring(Both Original and Replacement)  
A251 ----- .2485 to .2490 Inch  
A284 ----- .2480 to .2590 Inch

Ring End Gap When Compressed in  
4.00 Inch Cylinder  
A251 ----- .002 to .0035  
Ring End Gap When Compressed in  
4.250 Inch Cylinder  
A284 ----- .015 to .055

Side Clearance in Groove (Original Equipment) ---- .0015 to .0085 Inch  
(Replacement Ring)----- .0031 to .0074 Inch

**CONNECTING RODS**

Piston Pin Bushing ----- Replacement Bronze Bushing,  
Ream in place. Use 1.3590 to 1.3594 Reamer.

Piston Pin Hole Diameter in  
Rod(Without Bushing) ----- 1.483 to 1.485 Inches

Inside Diameter of Piston  
Pin Bushing in Rod----- 1.3590 to 1.3594 Inches; Install New  
Bushing if Inside Diameter Exceeds 1.363.

Connecting Rod Bearing----- Replaceable, Precision Steel Backed,  
Copper Lead Alloy Liners.

Connecting Rod Capscrews ----- Self Locking Type, No Lock Wire  
Required-May be Used More Than Once.

Connecting Rod Length(Center to Center Between  
Pin Hole and Bearing Journal Hole ----- 10.499 to 10.501 Inches

Bearing Liner Width ----- 1.625 Inch

Diameter of Crankshaft Journal Hole  
in Rod(Without Liner)----- 2.9005 to 2.9010 Inches

Inside Diameter of Bearing Liner(Standard  
Liner in Place in Rod and Capscrews Tight)---- 2.7503 to 2.7518 Inches

Diameter of Crankshaft Rod Journal ----- 2.748 to 2.749 Inches

Clearance Between Rod Bearing  
and Crankshaft Journal ----- .0015 to .0036 Inch; Install New Bearing  
Liners When Clearance Exceeds .006 Inch.

Undersize Bearing Liners  
Available for Service ----- .002, .010, .020, .030 Inch

Allowable Connecting  
Rod Bearing End Play ----- .005 to .012 Inch

**CRANKSHAFT AND MAIN BEARINGS**

Crankshaft ----- Balanced Drilled to Provide Pressure  
Lubrication to Main and Connecting Rod Bear-  
ings.

Type Main Bearings----- Replaceable Precision, Steel Backed,  
Copper Lead Alloy Liners

Bearing Capscrews----- Self Locking Type, No Lock Wires  
Required - May Be Used More Than Once

Bearing Taking End Thrust --- Center(Two Replaceable Bronze Thrust  
Washers).

# diesel engine

## C-2 A267 AND A301 ENGINE SPECIFICATIONS

Type ----- CASE Full Diesel, 4 Cylinder 4 Stroke Cycle Valve-in-Head Engine.

Cylinder Heads----- Multiple Cylinder Heads can be removed individually for Servicing (2 cylinders per head).

Firing Order -----1-3-4-2

Bore  
A267 ----- 4-1/8 Inches  
A301 ----- 4-3/8 Inches

Stroke----- 5 Inches

Piston Displacement  
A267 ----- 267 Cubic Inches  
A301 ----- 301 Cubic Inches

Compression Ratio ----- 15 to 1

Oil Filter, Crankcase----- Replaceable Full Flow Element Type.

Method of Starting Diesel Engine ----- Engine Starts on Diesel Fuel (Electric Starting Motor).

### Maximum Compression Pressures

ENGINE WARMED UP TO OPERATING TEMP. AND RUNNING AT 1600 RPM

Altitude	Sea Level	1000 ft.	2000 ft.	3000 ft.	4000 ft.	5000 ft.
Compression Pressure	480 to 510 PSI	455 to 485 PSI	435 to 465 PSI	415 to 445 PSI	395 to 425 PSI	375 to 405 PSI

Allowable Variance Between Cylinders - 25 Pounds Pressure at 1600 RPM

### CYLINDER SLEEVES

Type ----- Replaceable Wet Type:Two Rubber O-Ring Seals carried on each sleeve.

Inside Diameter of Sleeve Bore  
A267-----4.125 to 4.126 Inches. Replace Sleeve when inside Diameter below Top Ring Ridge Exceeds 4.133 Inches.

A301----- 4.375 to 4.376 Inches. Replace Sleeve When Inside Diameter Below Top Ring Ridge Exceeds 4.333 Inches.

Piston Clearance in Sleeve (At Skirt)  
A267 ----- .0045 to .0055 Inch  
A301 ----- .0045 to .0065 Inch

Cylinder Sleeve Out-of-Round ----- Max. .002 Inch

### PISTON AND PISTON PINS

Piston Material  
A267 ----- Special Alloy Iron;Parco -Lubricized  
A301 ----- Aluminum

Piston Weight (Less Pin)  
A267 ----- 4.742 to 4.758 Pounds  
A301 ----- 3.937 to 3.939 Pounds

Diameter of Piston at Top of Skirt (Below Oil Ring)  
A267 ----- 4.106 to 4.109 Inches  
A301 ----- 4.341 to 4.345 Inches

Diameter of Piston at Bottom of Skirt  
A267 ----- 4.1205 to 4.1215 Inches  
A301 ----- 4.3675 to 4.3685 Inches

Piston Pins----- Full Floating Type:Held in Position with Snap Rings in Piston. Replaceable Bronze Bushing in Connecting Rod.

Piston Pin Length  
A267 ----- 3.395 to 3.405 Inches  
A301 ----- 3.670 to 3.675 Inches

Piston Pin Diameter  
A267 ----- 1.3583 to 1.3586 Inches  
A301 ----- 1.4994 to 1.4995 Inches

Piston Pin Fit in Piston  
A267 ----- .0003 to .0008 Inch. When Pin is lubricated with Light Engine Oil and held upright in Vise, Weight of Piston should allow it to slide slowly into position over Pin.

A301 ----- .0000 to .0003 Inch With Piston 50°F Warmer Than Pin.

Piston Pin Fit in Connecting Rod Bushing  
A267 ----- .0004 to .0011 Inch  
A301 ----- .0005 to .0010 Inch

### PISTON RINGS

Rings Per Piston ----- 4- (3 Compression and 1 Oil) .

Compression Rings  
Width of Ring (All 3) ----- .0930 to .0935 Inch

Ring End Gap(All 3)when Compressed in .  
4.125 Inch Cylinder A267 ----- .013 to .023 Inch  
Ring End Gap (All 3) when Compressed in  
4.375 Inch Cylinder A301 ----- .013 to .025 Inch

Side Clearance in Groove of 1st(Top) Ring  
A267 ----- .003 to .0045 Inch  
A301 ----- .0045 to .0060 Inch

Side Clearance in Groove of 2nd and 3rd Ring----- .0025 to .004 Inch

Oil Ring-----To install Replacement Ring, Follow Instructions Packed with Rings.

Width of Rings (Original Equipment)  
A267 ----- .2455 to .2485 Inch  
A301----- .2470 to .2490 Inch

Replacement Ring----- .2441 to .2474 Inch

Side Clearance in Groove(Original Equipment)  
A267 ----- .0025 to .0065 Inch  
A301----- .0025 to .0085 Inch

Replacement Ring  
A267 ----- .0015 to .003 Inch  
A301 ----- .0025 to .0085 Inch

### CONNECTING RODS

Connecting Rod Bushing -----Replaceable Bronze Bushing Replacement Bushing must be Reamed.

A267 ----- Use 1.3590 to 1.3594 Reamer  
A301 ----- Use 1.5000 to 1.5004 Reamer

Piston Pin Hole Diameter in Rod (Without Bushing)  
A267 ----- 1.483 to 1.485 Inches  
A301 ----- 1.686 to 1.688 Inches

Inside Diameter of Piston Pin Bushing in Rod  
A267----- 1.3590 to 1.3594 Inches: Install New Bushing if inside Diameter Exceeds 1.363 Inches.  
A301 ----- 1.500 to 1.5004 Inches; Install New Bushing if inside Diameter Exceeds 1.504 Inches.

Connecting Rod Bearing ----- Replaceable, Precision, Steel Backed Copper Lead Alloy Liners.

Connecting Rod Capscrews ----- Self Locking Type, No Lock Wires Required - May Be used More Than Once.

Connecting Rod Length (Center to Center Between Pin Hole and Bearing Journal Hole)-----10.499 to 10.501 Inches

Bearing Liner Width ----- 1.625 Inches

Diameter of Crankshaft Journal Hole in Rod(Without Liner) ----- 2.9005 to 2.9010 Inches

Inside Diameter of Bearing Liner(Standard Liner in Place in Rod and Capscrews Tight)----- 2.7503 to 2.7518 Inches

Diameter of Crankshaft Rod Journal----- 2.748 to 2.749 Inches

Clearance Between Rod Bearing and Crankshaft Journal ----- .0013 to .0038 Inch; Install New Bearing Liners When Clearance Exceeds .006 Inch

Undersize Bearing Liners Available for Service ----- .002,.010,.020,.030 Inch

Allowable Connecting Rod Bearing End Play ----- .005 to .012 Inch

### CRANKSHAFT AND MAIN BEARINGS

Crankshaft ----- Balanced; Drilled to Provide Pressure Lubrication to Main and Connecting Rod Bearings.

Type Main Bearings ----- Replaceable, Precision, Steel Backed Copper - Lead Alloy Liners.



Bearing Capscrews ----- Self Locking Type, No Lock  
Wires Required - May Be Used More Than Once.

Bearing Taking End Thrust ----- Center(Two Replaceable Bronze  
Thrust Washers).

Crankshaft End Play(Measured  
at Center Main Bearing) ----- .004 to .012 Inch; Install New  
Thrust Washers if End Play Exceeds .020 Inch.

Oversize Thrust Washers for  
End Play Available for Service ----- .006 Inch

Connecting Rod Bearing Journal Diameter ----- 2.748 to 2.749 Inches

Main Bearing Journal Diameter ----- 2.998 to 2.999 Inches

Crankshaft Main and Connecting  
Rod Journal Bearings out of Round ----- Maximum .001 Inch

Maximum Allowable Taper on  
Crankshaft Rod Journal ----- .002 Inch

Inside Diameter of Main Bearing Liners  
(In Place and Capscrews Tight) ----- 3.0006 to 3.0026 Inches

Clearance Between Main  
Bearing Liner and Journal ----- .0016 to .0046 Inch; Install  
New Bearing Liner when Clearance Exceeds  
.0065 Inches.

Width of 1st, 3rd, 5th  
Main Bearing Liners ----- 2.218 Inches

Width of 2nd, 4th  
Bearing Liners ----- 1.156 Inches

Width Between Crankshaft Main Bearing Cheeks

A.5th ----- 2.620 to 2.630 Inches

B.2nd and 4th ----- 1.5575 to 1.5675 Inches

C.3rd(Center)----- 2.624 to 2.626 Inches

Width Between Crankshaft Rod  
Bearing Journal Cheeks ----- 1.9975 to 2.0025 Inches

Undersize Main Bearing Liners  
Available for Service ----- .002,.010,.020,.030 Inch

Crankshaft Main Bearing  
Journals Should Be  
2.988-2.989 Inches for .010 Inch Undersize Bearing  
2.978-2.979 Inches for .020 Inch Undersize Bearing  
2.968-2.969 Inches for .030 Inch Undersize Bearing

Undersize Connecting Rod Bearing  
Shells Available for Service ----- .002,.010,.020,.030 Inch

Connecting Rod Crankshaft Journals Should  
Be Ground to ----- 2.738-2.739 Inches for .010 Inch Undersize Bearing  
2.728-2.729 Inches for .020 Inch Undersize Bearing  
2.718-2.719 Inches for .030 Inch Undersize Bearing

### CAMSHAFT AND BUSHINGS

Number of Bearing Surfaces on Camshaft ----- 4

Type Bushing ----- Replaceable, Precision, Steel Backed Babbitt

Bushing Lubrication ----- Pressure Lubricated from Oil Pump; Cam-  
shaft Drilled to Provide Pressure Lubrication to  
Valve Rocker Arm Assembly, and to Timing Gear  
Train.

Diameter of Camshaft at Each Bearing Surface ----- 2.246 to 2.247 Inches

Inside Diameter of Each Bushing  
(Measured when in Place in Block) ----- 2.2484 to 2.2514 Inches

No.1(Front)Bushing Length ----- 1.656 Inches

No.2 and 3 Bushing Lengths ----- 1.438 Inches

No.4 Bushing Length(w/cup type Camshaft plug) ----- 1.156 Inches

Camshaft End Play ----- Automatically Taken Up by Spring  
Loaded Thrust Button in Front End of Camshaft,  
Camshaft Washer Provided Between Drive  
Gear and Front Bearing.

Camshaft Washer

Outside Diameter ----- 3.240 to 3.260 Inches

Inside Diameter ----- 2.250 to 2.260 Inches

Thickness ----- .1225 to .1275 Inch

### VALVE PUSH ROD LIFTERS

Type ----- Mushroom

Outside Diameter of End that Projects into Block --.8097 to .8102 Inches

Diameter of Bore in Block for Lifter ----- .8115 to .8130 Inch

Oversize Lifter Available for Service ----- .010 In. Oversize Lifter

Bore in Block Must Be Reamed to ----- .8215 to .8225 Inch for .010 Inch  
Oversize Lifter.

### VALVES

#### Valve Tappet Clearance

Intake and Exhaust ----- .025 Inch, Engine Cold

#### Exhaust Valves

Angle of Valve Face ----- 44 Degrees

Valve Length

A267 ----- 6.238 Inches

A301 ----- 6.382 Inches

Maximum Valve Face Runout ----- .002 Inch as Determined with a Dial  
Indicator.

Diameter of Valve Stem --- .400 to .401 Inch. Install New Valve if there  
is more than .002 Inch Difference in Diameter at  
any Point on Stem.

Diameter of Valve Head

A267 ----- 1.484 Inches

A301 ----- 1.562 Inches

Inside Diameter of Valve Guide ----- .4045 to .4055 Inch(After Assembly).

Valve Stem Clearance in Guide ----- .0035 to .0055 Inch

#### Exhaust Valve Seat Insert

Seat Angle ----- 45 Degrees

Seat Contact Width ----- .073 to .084 Inch

Outside Diameter of Insert

A267 ----- 1.640 to 1.641 Inches

A301 ----- 1.722 to 1.723 Inches

Inside Diameter of Insert

A267 ----- 1.323 to 1.333 Inches

A301 ----- 1.401 to 1.411 Inches

Maximum Allowable Seat Runout ----- .002 Inch as Determined  
with a Dial Indicator.

#### Intake Valves

Angle of Valve Face ----- 44 Degrees

Valve Length

A267 ----- 7.243 Inches

A301 ----- 7.368 Inches

Maximum Valve Face Runout ----- .002 Inch as Determined  
with a Dial Indicator.

Diameter of Valve Stem ----- .402 to .403 Inch Install New Valve  
if there is More than .002 Inch Difference in  
Diameter at any Point on Stem.

Diameter of Valve Head

A267 ----- 1.731 Inches

A301 ----- 1.825 Inches

Inside Diameter of Valve Guide --- .4045 to .4055 Inch.(After Assembly)

Stem Clearance in Guide ----- .0015 to .0035 Inch

#### Intake Valve Seat







Seat Angle ----- 45 Degrees

Seat Contact Width ----- .086 to .096 Inch

## GENERAL TORQUE SPECIFICATION TABLE (Revised 5-64)

**USE THE FOLLOWING TORQUES WHEN SPECIAL TORQUES ARE NOT GIVEN**

**NOTE:** These values apply to fasteners as received from supplier, dry, or when lubricated with normal engine oil. They do not apply if special graphited or moly-disulphide greases or other extreme pressure lubricants are used. This applies to both UNF and UNC threads.

SAE Grade No.	5		8 *			
Bolt head identification marks as per grade Note: Manufacturing Marks Will Vary						
	Torque Foot Pounds			Torque Foot Pounds		
Bolt Size	Min.	Max.	Min.	Max.		
1/4"	9	11	12	15		
5/16	15	18	24	28		
3/8	35	40	45	50		
7/16	54	60	70	80		
1/2	80	90	110	125		
9/16	110	120	160	180		
5/8	150	165	220	240		
3/4	260	280	380	420		
7/8	360	400	600	660		
1"	540	600	900	1000		
1-1/8	720	800	1280	1440		
1-1/4	1000	1100	1800	2000		
1-3/8	1460	1680	2380	2720		
1-1/2	1940	2200	3160	3560		

\* Thick nuts must be used with Grade 8 bolts

## TIMING CHART

ENGINE	FULL LOAD GOVERNED ENGINE SPEED	NUMBER OF DEGREES
A251G—W9	1800	32° BTDC
A267D—W9	1800	33° BTDC
A284G— W7 W9A	2000	32° BTDC
A301D— W7 W9A	2000	32° BTDC

## VALVE TIMING

With valve clearances set correctly, dial indicator mounted above valve stem, reading taken with valve .040" off its seat.

A267D and A301D Inlet Opening (No. 1 Cyl.) ----- 3° BTDC

A251G and A284G Inlet Opening (No. 1 Cyl.) ----- 6° ATC

**NOTE** "Inlet opening" is the only position on these engines that can be checked by the crankshaft pulley marks. Since the crankshaft pulley is only marked to 5° ATC, the 6° ATC mark will have to be measured and scribed on the pulley. Use the degree marks already on the pulley for measurement. If this position is correct, it can be assumed that the timing gears are correctly marked and properly assembled.

**NOTE:** The J I Case Company reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

# SECTION

# CC

## SPECIFICATIONS FOR CASE

**W8B-A 401 DIESEL ENGINE**

**W8B-A 377 GASOLINE ENGINE**

**W9B-A 401 DIESEL ENGINE**

**W9B-A 377 GASOLINE ENGINE**

**W10B-A 401 DIESEL ENGINE**

**W10B-A 377 GASOLINE ENGINE**

**W10-A 401 DIESEL ENGINE**

**W12-A 451 DIESEL ENGINE**

The Specifications are the Same Unless Otherwise Indicated

# diesel engines

## CC-2 A401 AND A451 ENGINE SPECIFICATIONS

Type -----CASE Full Diesel, 6 Cylinder 4 Stroke Cycle Valve-in-Head Engine.

Cylinder Heads -----Multiple Cylinder Heads can be removed individually for Servicing(2 cylinders per head).

Firing Order ----- 1-5-3-6-2-4

Bore  
 A401 ----- 4-1/8 Inches  
 A451 ----- 4-3/8 Inches

Stroke ----- 5 Inches

Piston Displacement  
 A401 ----- 401 Cubic Inches  
 A451 ----- 451 Cubic Inches

Compression Ratio ----- 15 to 1

Oil Filter, Crankcase-----Replaceable Full Flow Element Type.

Method of Starting Diesel Engine ----- Engine Starts on Diesel Fuel (Electric Starting Motor).

Decompressor ----- Holds Exhaust Valves Open so Engine can be Cranked for Servicing.

Exhaust Valve Rotators ----- Positive Type

### Maximum Compression Pressures ENGINE WARMED UP TO OPERATING TEMP. AND RUNNING AT 1600 RPM

Altitude	Sea Level	1000 ft.	2000 ft.	3000 ft.	4000 ft.	5000 ft.
Compression	480 to	455 to	435 to	415 to	395 to	375 to
Pressure	510 PSI	485 PSI	465 PSI	425 PSI	425 PSI	405 PSI

Allowable Variance Between Cylinders - 25 Pounds Pressure at 1600 RPM

### CYLINDER SLEEVES

Type -----Replaceable Wet Type:Two Rubber O-Ring Seals carried on each sleeve.

Inside Diameter of Sleeve Bore  
 A401 ----- 4.125 to 4.126 Inches. Replace Sleeve when inside Diameter below Top Ring Ridge Exceeds 4.133.  
 A451 ----- 4.375 to 4.376 Inches. Replace Sleeve when inside Diameter below Top Ring Ridge Exceeds 4.383 Inches.

Piston Clearance in Sleeve(At Skirt)  
 A401 ----- .0045 to .0055 Inch  
 A451 ----- .0045 to .0065 Inch

### PISTON AND PISTON PINS

Piston Material  
 A401 ----- Special Alloy Iron;Parco-Lubrized  
 A401(W9 Series B) ----- Aluminum  
 A451 ----- Aluminum

Piston Weight (Less Pin)  
 A401 ----- 4.742 to 4.758 Pounds  
 A401(W9 Series B) ----- 3.400 Pounds  
 A451 ----- 3.937 to 3.939 Pounds

Diameter of Piston at Top  
 A401 ----- 4.106 to 4.109 Inches  
 A401(W9 Series B) ----- 4.092 to 4.096 Inches  
 A451 ----- 4.341 to 4.345 Inches

Diameter of Piston at Skirt  
 A401 ----- 4.1205 to 4.1215 Inches  
 A401(W9 Series B) ----- 4.1155 to 4.1201 Inches  
 A451 ----- 4.3675 to 4.3685 Inches

Piston Pins ----- Full Floating Type:Held in Position with Snap Rings in Piston. Replaceable Bronze Bushing in Connecting Rod.

Piston Pin Length  
 A401 ----- 3.395 to 3.405 Inches  
 A401(W9 Series B) ----- 3.485 to 3.490 Inches  
 A451 ----- 3.670 to 3.675 Inches

Piston Pin Diameter  
 A401 ----- 1.3583 to 1.3586 Inches

A401(W9 Series B) ----- 1.4994 to 1.4995 Inches  
 A451 ----- 1.4994 to 1.4995 Inches

Piston Pin Fit in Piston  
 A401 ----- .0007 to .0012 Inch. When Pin is Lubricated with Light Engine Oil and held upright in Vise, Weight of Piston should allow it to slide slowly into position over Pin.  
 A401(W9 Series B) ----- .0000 to .0003 Inch  
 A451 ----- .0000 to .0003

Piston Pin Fit in Connecting Rod Bushing  
 A401 ----- .0004 to .0011 Inch  
 A401(W9 Series B) ----- .0009 to .0014 Inch  
 A451 ----- .0005 to .0010 Inch

### PISTON RINGS

Rings Per Piston ----- 4- (3 Compression and 1 Oil).

Compression Rings (Top 3)

1st (Top ) Ring ----- Chromium Plated; Tapered Face: Top Marked.

2nd and 3rd Rings ----- Relief Indicates Bottom Side

Width of Ring (All 3)----- .0930 to .0935 Inch

Ring End Gap(All 3)when Compressed in  
 4.125 Inch Cylinder A401 ----- .013 to .023 Inch  
 Ring End Gap(All 3) when Compressed in  
 4.375 Inch Cylinder A451 ----- .013 to .025 Inch

Side Clearance in Groove of 1st (Top)Ring  
 A401 ----- .003 to .0045 Inch  
 A451 ----- .0045 to .0060 Inch

Side Clearance in Groove of 2nd and 3rd Ring----- .0025 to .004 Inch

Oil Ring ----- To install Replacement Ring, Follow Instructions Packed with Rings.

Width of Rings (Original Equipment)  
 A401 ----- .2455 to .2485 Inch  
 A451 ----- .2470 to .2490 Inch

Replacement Ring ----- .2441 to .2474 Inch

Side Clearance in Groove(Original Equipment)  
 A401 ----- .0025 to .0065 Inch  
 A451 ----- .0025 to .0085 Inch

Replacement Ring  
 A401 ----- .0036 to .0079 Inch  
 A451 ----- .0025 to .0085 Inch

### CONNECTING RODS

Connecting Rod Bushing ----- Replaceable Bronze Bushing Replacement Bushing must be Reamed.  
 A401 ----- Use 1.3590 to 1.3594 Reamer  
 A401 (W9 Series B) ----- Use 1.5004 to 1.5008 Reamer  
 A451 ----- Use 1.5004 to 1.5008 Reamer

Piston Pin Hole Diameter in Rod (Without Bushing)  
 A401 ----- 1.483 to 1.485 Inches  
 A401(W9 Series B) ----- 1.686 to 1.688 Inches  
 A451 ----- 1.686 to 1.688 Inches

Inside Diameter of Piston Pin Bushing in Rod  
 1.3590 to 1.3594 Inches; Install New Bushing if inside Diameter Exceeds 1.363 Inches.  
 1.5004 to 1.5008 Inches. Install New Bushing if inside Diameter Exceeds 1.504 Inches.

Connecting Rod Bearing ----- Replaceable, Precision, Steel Backed Copper Lead Alloy Liners.

Connecting Rod Capscrews ----- Self Locking Type, No. Lock Wires Required May be used More Than Once.

Connecting Rod Length (Center to Center Between Pin Hole and Bearing Journal Hole)--- 10.499 to 10.501 Inches

Bearing Liner Width ----- 1-5/8 Inch

Diameter of Crankshaft Journal Hole in Rod(Without Liner)----- 2.9005 to 2.9010 Inches

Inside Diameter of Bearing Liner(Standard Liner in place in Rod and Capscrews Tight)----- 2.7503 to 2.7518 Inches

Diameter of Crankshaft Rod Journal ----- 2.748 to 2.749

Clearance Between Rod Bearing and Crankshaft Journal ----- .0013 to .0036 Inch; Install New Bearing Liners When Clearance Exceeds .006 Inch.

Undersize Bearing Liners Available for Service ----- .002, .010, .020, .030 Inch

Allowable Connecting Rod Bearing End Play ----- .005 to .012 Inch

### CRANKSHAFT AND MAIN BEARINGS

Crankshaft ----- Balanced; Drilled to Provide Pressure Lubrication to Main and Connecting Rod Bearings .

Type Main Bearings ----- Replaceable, Precision, Steel Backed Copper - Lead Alloy Liners.

Bearing Capscrews ----- Self Locking Type, No Lock Wires Required May Be Used More Than Once.

Bearing Taking End Thrust ----- 5th(Two Replaceable Bronze Thrust Washers.)

Crankshaft End Play(Measured at No. 5 Main Bearing) ----- .004 to .012 Inch; Install New Thrust Washers if End Play Exceeds .020 Inch.

Oversize Thrust Washers for End Play Available for Service ----- .006 Inch

Connecting Rod Bearing Journal Diameter----- 2.748 to 2.749 Inches

Main Bearing Journal Diameter ----- 2.998 to 2.999 Inches

Crankshaft Main and Connecting Rod Journal Bearings out of Round ----- Maximum .001 Inch

Inside Diameter of Main Bearing Liners (In Place and Capscrews Tight)----- 3.0006 to 3.0026 Inches

Clearance Between Main Bearing Liner and Journal ----- .0016 to .0046 Inch; Install New Bearing Liner when Clearance Exceeds .0065 Inches.

Width of 1st, 3rd 5th and 7th Main Bearing Liners ----- 2-7/32 Inches

Width of 2nd, 4th and 6th Main Bearing Liners ----- 1-5/32 Inches

Width Between Crankshaft Main Bearing Cheeks

A. 3rd, 7th ----- 2.620 to 2.630 Inches

B. 2nd, 4th and 6th ----- 1.5575 to 1.5675 Inches

C. 5th ----- 2.624 to 2.626 Inches

Width Between Crankshaft Rod Bearing Journal Cheeks ----- 1.9975 to 2.0025 Inches

Undersize Main Bearing Liners Available for Service ----- .002, .010, .020, .030 Inch

Crankshaft Main Bearing Journals Should Be  
2.988-2.989 Inches for .010 Inch Undersize Bearing  
2.978-2.979 Inches for .020 Inch Undersize Bearing  
2.968-2.969 Inches for .030 Inch Undersize Bearing

Undersize Connecting Rod Bearing Shells Available for Service ----- .002, .010, .020, .030 Inch

Connecting Rod Crankshaft Journals Should Be Ground to-----  
2.738-2.739 Inches for .010 Inch Undersize Bearing  
2.728-2.729 Inches for .020 Inch Undersize Bearing  
2.718-2.719 Inches for .030 Inch Undersize Bearing

### CAMSHAFT BUSHINGS

Number of Bearing Surfaces on Camshaft ----- 5

Type Bushing ----- Replaceable, Precision, Steel Backed Babbitt

Bushing Lubrication ----- Pressure Lubricated from Oil Pump; Camshaft Drilled to Provide Pressure Lubrication to Valve Rocker Arm Assembly, and to Timing Gear Train.

Diameter of Camshaft at Each Bearing Surface  
A401 Camshaft No. 6310A  
(use w/Welch type Camshaft Plug)----- 2.121 to 2.122 Inches  
A401 Camshaft No. A21428  
(use w/Welch type Camshaft Plug)----- 2.246 to 2.247 Inches

A401 Camshaft No. A23486  
(use w/cup type Camshaft Plug) ----- 2.246 to 2.247 Inches  
A401 Camshaft No. A23513  
(use w/cup type Camshaft Plug)----- 2.246 to 2.247 Inches  
A451 ----- 2.246 to 2.247 Inches

Inside Diameter of Each Bushing (Measured when in Place in Block)  
A401 Camshaft No. 6310A  
(use w/Welch Type Camshaft Plug) ----- 2.1234 to 2.1264 Inches  
A401 Camshaft No. A21428  
(use w/Welch type Camshaft Plug)----- 2.2484 to 2.5414 Inches  
A401 Camshaft No. A23486  
(use w/cup type Camshaft Plug) ----- 2.2484 to 2.5414 Inches  
A401 Camshaft No. A23513  
(use w/cup Type Camshaft Plug) ----- 2.2484 to 2.5414 Inches  
A451----- 2.2484 to 2.5414 Inches

No. 1(Front) Bushing Length ----- 1-21/32 Inches

No. 2, 3 and 4 Bushing Lengths ----- 1-7/16 Inches

No. 5 Bushing Length(w/Welch Type Camshaft Plug) ----- 1-7/16 Inches  
No. 5 Bushing Length(w/cup type Camshaft plug)----- 1-5/32 Inches

Camshaft End Play ----- Automatically Taken Up by Spring Loaded Thrust Button in Front End of Camshaft. Camshaft Washer Provided Between Drive Gear and Front Bearing.

Camshaft Washer

Outside Diameter ----- 3.240 to 3.260 Inches

Inside Diameter  
A401 Camshaft No. 6310A  
(Use w/Welch type Camshaft Plug) ----- 2.125 to 2.135 Inches  
A401 Camshaft No. A21428  
(Use w/Welch type Camshaft Plug)----- 2.250 to 2.260 Inches  
A401 Camshaft No. A23486  
(Use w/cup type Camshaft Plug) ----- 2.250 to 2.260 Inches  
A401 Camshaft No. A23513  
(Use w/cup type Camshaft Plug)----- 2.250 to 2.260 Inches  
A451----- 2.250 to 2.260 Inches

Thickness ----- .1225 to .1275 Inch

### VALVE PUSH ROD LIFTERS

Type ----- Mushroom Type

Outside Diameter of End that Projects into Block

A401 Camshaft No. 6310A  
(Use w/Welch type Camshaft Plug)----- .8095 to .8105 Inches  
A401 Camshaft No. A21428  
(Use w/Welch type Camshaft Plug)----- .8097 to .8102 Inches  
A401 Camshaft A23513  
(Use w/cup type Camshaft Plug)----- .8097 to .8102 Inches  
A451 ----- .8097 to .8102 Inch

Diameter of Bore in Block for Lifter ----- .8115 to .8130 Inch

Oversize Lifter Available for Service ----- .010 In. Oversize Lifter

Bore in Block Must Be Reamed to----- .8215 to .8225 Inch for .010 Inch Oversize Lifter.

### VALVES

#### Valve Tappet Clearance

A401 Intake ----- .012 Inch, Engine Cold  
Exhaust ----- .020 Inch, Engine Cold  
A401(W9 Series B) ---- .025 In., Engine Cold (Both Intake and Exhaust)  
A451 ----- .025 In., Engine Cold(Both Intake and Exhaust)

#### Exhaust Valves

Angle of Valve Face ----- 44 Degrees

Maximum Valve Face Runout ---- .002 Inch as Determined with a Dial Indicator.

Diameter of Valve Stem---- .4000 to .401 Inch. Install New Valve if there is More than .002 Inch Difference in Diameter at Any Point on Stem.

Inside Diameter of Valve Guide----- .4045 to .4055 Inch(After Assembly).

Valve Stem Clearance in Guide ----- .0035 to .0055 Inch

**CC-4**

**Exhaust Valve Seat Insert**

Seat Angle ----- 45 Degrees  
 Seat Width ----- .073 to .084 Inch  
 Insert Height ----- .312 to .317 Inch  
 Outside Diameter of Insert  
 A401----- 1.640 to 1.641 Inches  
 A451 ----- 1.722 to 1.723 Inches  
 Inside Diameter of Insert  
 A401 ----- 1.323 to 1.333 Inches  
 A451 ----- 1.401 to 1.411 Inches  
 Maximum Allowable Seat Runout ----- .003 Inch as Determined  
 with a Dial Indicator

**Intake Valves**

Angle of Valve Face ----- 44 Degrees  
 Maximum Valve Face Runout----- .002 Inch as Determined  
 with a Dial Indicator.  
 Diameter of Valve Stem ----- .402 to .403 Inch Install New Valve  
 if there is More than .002 Inch Difference in  
 Diameter at any Point on Stem.  
 Inside Diameter of Valve Guide ---- .4045 to .4055 Inch.(After Assembly)  
 Stem Clearance in Guide----- .0015 to .0035 Inch

**Intake Valve Seat**

Seat Angle ----- 45 Degrees.  
 Seat Width  
 A401----- .086 to .096 Inch  
 A451 ----- .070 to .086 Inch

**Exhaust Valve Guides**

Length ----- 3-7/32 Inches  
 Outside Diameter ----- .7510 to .7515 Inch  
 Inside Diameter ----- .4045 to .4055 Inch.(After Assembly)  
 Valve Stem Clearance in Guide ----- .0035 to .0055 Inch  
 Distance Above Head Guide Must Protrude---1-1/16 Inches, Press Fit

**Intake Valve Guides**

Length ----- 4-3/8 Inches  
 Outside Diameter ----- .7510 to .7515 Inch  
 Inside Diameter ----- .4045 to .4055 Inch(After Assembly)  
 Valve Stem Clearance in Guide ----- .0015 to .0035 Inch  
 Distance Above Head  
 Guide Must Protrude ----- 1-1/16 Inches, Press Fit

**VALVE SPRINGS**

Free Length ----- Approximately 2.438 Inches  
 Spring Pressure at Compressed Height of  
 1-31/64 Inches (Valve Open)----- 102 Pounds; Install New Spring if  
 Pressure is Less than 92 Pounds.  
 Spring Pressure at Compressed Height of  
 1-15/16 Inches(Valve Closed)---45 Pounds; Install New Spring if Pres-  
 sure is Less than 41 Pounds.

**ROCKER ARM ASSEMBLY**

Rocker Arm Bushing ----- Replaceable Precision Bronze Bushing  
 Number of Bushings ----- 12  
 Lubrication ----- Pressure Lubricated; Crankcase Oil to  
 Rocker Arms Metered By Camshaft.  
 Oil Holes in Rocker Arm Shaft -----Oil Holes must Face Push Rod  
 Side of Engine Only. Shaft Cannot Be Rotated.  
 Positioning of Exhaust  
 Valve Rocker Arms ----- Spacer Washers Position Exhaust Valve  
 Rocker Arm and Eliminate End Play without Binding.

Outside Diameter of  
 Rocker Arm Shaft ----- .872 to .873 Inch  
 Inside Diameter of Rocker  
 Arm Bushing ----- .8745 to .8755 Inch

**OIL PUMP**

Type ----- Positive Displacement, Gear Type Pump;  
 Driven Off Camshaft.  
 Pressure Relief Valve -----Maintains 40 to 45 Pounds Full Pres-  
 sure(Oil Warm,Engine Operating at Full Governed Speed)Relief Valve is Adjustable.

**WATER PUMP AND THERMOSTAT**

Type of System -----Pressurized Thermostat Controlled  
 By-Pass Type; Forced Circulation(Pump)  
 Type Pump ----- Impeller Vane Type  
 Radiator ----- Heavy Duty Fin and Tube Type  
 Temperature Control ----- By-Pass Type Thermostat

**FUEL SYSTEM**

Injection Pump -----Robert Bosch,Type PES Multiple Plunger Pump  
 Direction of Pump Rotation ----- Counter-Clockwise  
 Pump Mounting ----- Left Hand Side of Engine  
 Pump Drive ----- Gear Driven from Camshaft Gear at Camshaft Speed  
 Injection Pump Drive Lubrication ----- Pressure Lubricated From  
 Front Camshaft Bearing.  
 Injection Pump Drive Shaft Diameter ----- 1.3700 to 1.3705 Inches  
 Normal Clearance Between  
 Drive Shaft and Bushings ----- .001 to .002 Inch  
 Number of Drive  
 Shaft Bushings -----2- These Bushings are Not Re-  
 placeable. A Replacement Drive Housing with  
 Bushings in Place Aligned and Fine Bored is Provided.

Injection Pump Drive  
 Shaft End Play ----- Automatically Taken Up By a Spring  
 Loaded Thrust Button on Front End of Drive Shaft.  
 Thrust Washers Provided Between Front Drive Gear  
 and Drive Shaft Housing.

**Thrust Washer**

Outside Diameter ----- 2.085 to 2.105 Inches  
 Inside Diameter ----- 1.3725 to 1.3825 Inches  
 Thickness ----- .1225 to .1275 Inch

Timing Marks on Engine----- Timing Marks Located on Crankshaft  
 Pulley Flange(0 through 5 and 20 through 35  
 Degrees Before Top Dead Center). Pointer  
 Located on Timing Gear Cover.

Fuel Injectors ----- Robert Bosch Pintle Type;Opening Pressure  
 1950 to 2050 Pounds Per Square Inch.

Governor ----- Mechanical Variable Speed Fly-Weight Centrifugal  
 Type; Integral Part of Injection Pump.

**Fuel Filters**

Fuel Tank Breather Air Filter ----Located in Fuel Tank Filler Cap  
 Fuel Tank Water Trap ----- Located in Base of Fuel Tank  
 1st Stage Fuel Filter ----- Replaceable Element Type  
 2nd Stage Fuel Filter ----- Replaceable Element Type  
 Final Fuel Filter ----- Replaceable Sealed "Can"Type Filter.

## A377 ENGINE SPECIFICATIONS

Type ----- CASE 6 Cylinder, 4 Stroke Cycle, Valve-In-Head Engine.

Cylinder Heads ----- Multiple Cylinder Heads can be removed individually for Servicing (2 Cylinders per head).

Firing Order ----- 1-5-3-6-2-4

Bore ----- 4 Inches

Stroke ----- 5 Inches

Piston Displacement ----- 377 Cubic Inches

Compression Ratio ----- 6.8 to 1

Maximum Compression at Cranking Speed (150 RPM) Engine Warmed up to Operating Temperature ----- 140 PSI at Sea Level

Allowable Variance Between Cylinders ----- 15 Pounds Pressure

Oil Filter, Crankcase ----- Replaceable Full Flow Element Type.

Exhaust Valve Rotators ----- Positive Type

Ignition ----- Distributor

### CYLINDER SLEEVES

Type ----- Replaceable Wet Type; Two Rubber O-ring Seals Carried on each sleeve.

Inside Diameter of Sleeve Bore ----- 4.00 to 4.001 Inches, Replace Sleeve when Inside Diameter Below Top Ring Ridge Exceeds 4.008 Inches.

Piston Clearance in Sleeve (At Skirt) ----- .0035 to .0045 Inches

### PISTON AND PISTON PINS

Piston Material ----- Aluminum

Piston Weight (less Pin) ----- 2.205 to 2.214 Pounds

Diameter of Piston at Top ----- 3.964 to 3.968

Diameter of Piston at Top of Skirt (Measured Immediately Below Oil Ring, Across Thrust Faces) ----- 3.996 to 3.997

Piston Pins ----- Full Floating Type; Held in Position with Snap Rings in Piston; Replaceable Bronze Bushing in Connecting Rods.

Piston Pin Length ----- 3.395 to 3.405 Inches

Piston Pin Diameter ----- 1.3583 to 1.3586 Inches

Piston Pin Fit in Piston ----- .0001 to .0003 Inch

Piston Pin Fit in Connecting Rod Bushing ----- .0004 to .0011 Inch

### PISTON RINGS

Rings Per Piston ----- 4 - (3 Compression and 1 Oil)

Compression Rings (Top 3)

1st (Top) Ring ----- Chromium Plated; Relief Indicates Top Side

2nd and 3rd Rings ----- Tapered Face, Top Marked

Width of Rings (All 3) ----- .0930 to .0935 Inch

Ring End Gap (All 3) When Compressed in 4.000 Inch Cylinder ----- .013 to .023 Inch

Side Clearance in Groove of 1st (top) Ring ----- .0025 to .0040 Inch

Side Clearance in Groove of 2nd and 3rd Ring ----- .0020 to .0040 Inch

Oil Ring ----- To install Replacement Ring, Follow Instructions Packed with Rings.

Width of Ring (Both Original and Replacement) ----- .2485 to .2490 Inch

Ring End Gap when Compressed in 4.00 Inch Cylinder ----- .002 to .0035

Side Clearance in Groove (Original Equipment) ----- .0025 to .0065 Inch (Replacement Ring) ----- .0036 to .0079 Inch

### CONNECTING RODS

CC-5

Piston Pin Bushing ----- Replacement Bronze Bushing, Ream in place. Use 1.3590 to 1.3594 Reamer.

Piston Pin Hole Diameter in Rod (Without Bushing) ----- 1.483 to 1.485 Inches

Inside Diameter of Piston Pin Bushing in Rod ----- 1.3590 to 1.3594 Inches; Install New Bushing if Inside Diameter Exceeds 1.363

Connecting Rod Bearing ----- Replaceable, Precision Steel Backed, Copper Lead Alloy Liners.

Connecting Rod Capscrews ----- Self Locking Type, No Lock Wire Required - May be Used More Than Once.

Connecting Rod Length (Center to Center Between Pin Hole and Bearing Journal Hole) ----- 10.499 to 10.501 Inches

Bearing Liner Width ----- 1-5/8 Inch

Diameter of Crankshaft Journal Hole in Rod (Without Liner) ----- 2.9005 to 2.9010 Inches

Inside Diameter of Bearing Liner (Standard Liner in Place in Rod and Capscrews Tight) ----- 2.7503 to 2.7518 Inches

Diameter of Crankshaft Rod Journal ----- 2.748 to 2.749 Inches

Clearance Between Rod Bearing and Crankshaft Journal ----- .0015 to .0036 Inch; Install New Bearing Liners When Clearance Exceeds .006 Inch.

Undersize Bearing Liners Available for Service ----- .002, .010, .020, .030 Inch

Allowable Connecting Rod Bearing End Play ----- .005 to .012 Inch

### CRANKSHAFT AND MAIN BEARINGS

Crankshaft ----- Balanced Drilled to Provide Pressure Lubrication to Main and Connecting Rod Bearings

Type Main Bearings ----- Replaceable Precision, Steel Backed, Copper Lead Alloy Liners.

Bearing Capscrews ----- Self Locking Type, No Lock Wires Required - May Be Used More Than Once

Bearing Taking End Thrust ----- 5th (Two Replaceable Bronze Thrust Washers.)

Crankshaft End Play (Measured At No. 5 Main Bearing) ----- .004 to .012 Inch; Install New Thrust Washers if End Play Exceeds .020 Inch.

Oversize Thrust Washers for End Play Available for Service ----- .006 Inch

Connecting Rod Bearing Journal Diameter ----- 2.748 to 2.749 Inches

Main Bearing Journal Diameter ----- 2.998 to 2.999 Inches

Crankshaft Main and Connecting Rod Journal Bearing Out of Round ----- Maximum .001 Inch

Inside Diameter Of Main Bearing Liners (In Place and Capscrews Tight) ----- 3.0006 to 3.0026 Inches

Clearance Between Main Bearing Liner and Journal ----- .0020 to .0046 Inch; Install New Bearing Liner when Clearance Exceeds .0065 Inches.

Width of 1st, 3rd, 5th and 7th Main Bearing Liners ----- 2-7/32 Inches

Width of 2nd, 4th and 6th Main Bearing Liners ----- 1-5/32 Inches

Width Between Crankshaft Main Bearing Cheeks:

A. 3rd, 7th ----- 2.620 to 2.630 Inches

B. 2nd, 4th and 6th ----- 1.5575 to 1.5675 Inches

**CC-6**

C.5th -----2.624 to 2.626 Inches

Width Between Crankshaft  
Rod Bearing Journal Cheeks ----- 1.9975 to 2.0025 Inches

Undersize Main Bearing Liners  
Available for Service ----- .002, .010, .020, .030 Inch

Crankshaft Main Bearing  
Journals should  
be ground to ----- 2.988-2.989 Inches for .010 Inch Undersize Bearing  
2.978-2.979 Inches for .020 Inch Undersize Bearing  
2.968-2.969 Inches for .030 Inch Undersize Bearing

Undersize Connecting Rod Bearing  
Shells Available for Service ----- .002, .010, .020, .030 Inch

Connecting Rod Crankshaft  
Journals should be  
ground to ----- 2.738-2.739 Inches for .010 Inch Undersize Bearing  
2.728-2.729 Inches for .020 Inch Undersize Bearing  
2.718-2.719 Inches for .030 Inch Undersize Bearing

**CAMSHAFT BUSHINGS**

Number of Bearing Surfaces on Camshaft ----- 5

Type Bushing ----- Replaceable, Precision, Steel Backed Babbitt

Bushing Lubrication ----- Pressure Lubricated from Oil Pump; Camshaft  
Drilled to Provide Pressure Lubrication to Valve  
Rocker Arm Assembly, and to Timing Gear Train.

Diameter of Camshaft at Each  
Bearing Surface ----- 2.246 to 2.247 Inches

Inside Diameter of Each Bushing  
(Measured when in Place in Block) ----- 2.2484 to 2.2514 Inches

No. 1 (Front) Bushing Length ----- 1-21/32 Inches

No. 2, 3 and 4 Bushings Lengths ----- 1-7/16 Inches

No 5. Bushing Length ----- 1-5/32 Inches

Camshaft End Play ----- Automatically Taken up by Spring Loaded  
Thrust Button in Front End of Camshaft. Bronze  
Washer Provided Between Drive Gear and Front  
Bearing.

Camshaft Bronze Washer

Outside Diameter ----- 3.240 to 3.260 Inches

Inside Diameter ----- 2.250 to 2.260 Inches

Thickness ----- .1225 to .1275 Inch

**VALVE PUSH ROD LIFTERS**

Type ----- Mushroom Type

Outside Diameter of End that Projects  
into Block ----- .8097 to .8102 Inches

Diameter of Bore in Block for Lifter ----- .8115 to .8130 Inches

Oversize Lifter Available for Service ----- .010 Inch Oversize Lifter

Bore in Block Must be Reamed to ----- .8215 to .8225 Inch for  
.010 Inch Oversize Lifter.

**VALVES**

**Valve Tappet Clearance**

Intake ----- .015 Inch, Engine Cold

Exhaust ----- .025 Inch, Engine Cold

**Exhaust Valves**

Angle of Valve Face ----- 44 Degrees

Maximum Valve Face Runout ----- .002 Inch as Determined  
with a Dial Indicator.

Diameter of Valve Stem ----- .400 to .401 Inch; Install New Valve if  
there is More Than .002 Inch Difference  
in Diameter at any Point on Stem.

Inside Diameter of Valve Guide ----- .4045 to .4055 Inch

Valve Stem Clearance in Guide ----- .0035 to .0055 Inch

Valve Rotators ----- Positive Type

**Exhaust Valve Seat Insert**

Seat Angle ----- 45 Degrees

Seat Width ----- .081 to .096

Insert Height ----- .250 to .255 Inch

Outside Diameter of Insert ----- 1.630 to 1.631 Inches

Inside Diameter of Insert ----- 1.370 to 1.380 Inches

Maximum Allowable Seat Runout ----- .002 Inch as Determined  
with a Dial Indicator.

**Intake Valves**

Angle of Valve Face ----- 44 Degrees

Maximum Valve Face Runout ----- .002 Inch as Determined  
With a Dial Indicator.

Diameter of Valve Stem ----- .402 to .403 Inch; Install New Valve  
if there is More than .002 Inch Difference in  
Diameter at any Point on Stem.

Inside Diameter of Valve Guide --- .4045 to .4055 Inch (After Assembly)

Stem Clearance in Guide ----- .0015 to .0035 Inch

**Intake Valve Seat**

Seat Angle ----- 45 Degrees

Seat Width ----- .070 to .086 Inch

**Exhaust Valve Guides**

Length ----- 3-5/8 Inches

Outside Diameter ----- .7510 to .7515 Inch

Inside Diameter ----- .4045 to .4055 Inch

Valve Stem Clearance in Guide ----- .0035 to .0055 Inch

Distance Above Head Guide Must Protrude ----- 1-1/16 Inch Press Fit

**Intake Valve Guides**

Length ----- 3-5/8 Inches

Outside Diameter ----- .7510 to .7515 Inch

Inside Diameter ----- .4045 to .4055 Inch

Valve Stem Clearance in Guide ----- .0015 to .0035 Inch

Distance Above Head Guide Must Protrude ----- 1-1/16 Inch Press Fit

**VALVE SPRINGS**

Free Length ----- Approx. 2.438 Inches

Spring Pressure at Compressed Height of  
1-17/32 Inches (Valve Open) ----- 95.5 Pounds; Install New Spring if  
Pressure is Less Than 86 Pounds.

Spring Pressure at Compressed Height of  
1-15/16 Inches (Valve Closed) ----- 45 Pounds; Install New Spring if  
Pressure is Less Than 41 Pounds.

**ROCKER ARM ASSEMBLY**

Rocker Arm Bushings ----- Replaceable Precision Bronze Bushing

Number of Bushings ----- 12

Lubrication ----- Pressure Lubricated; Crankcase Oil to Rocker  
Arms Metered by Camshaft.

Oil Holes in Rocker Arm Shaft --- Oil Holes Must Face Push Rod Side  
of Engine Only. Shaft Cannot Be Rotated.

Positioning of Exhaust Valve  
Rocker Arms ----- Spacer Washers Position Exhaust  
Valve Rocker Arm and Eliminates End Play  
Without Binding.

Outside Diameter of Rocker Arm Shaft ----- .872 to .873 Inch

Inside Diameter of Rocker Arm Bushing ----- .8745 to .8755 Inch



**OIL PUMP**

Type ----- Positive Displacement, Gear Type Pump  
Driven off Camshaft

Pressure Relief Valve ----- Maintains 40 to 45 Pounds Full Pressure  
(Oil Warm, Engine Operating at Full Governed  
Speed) Relief Valve is Adjustable.

Exhaust Elbow Stud Nuts  
and Capscrews-----

Water Manifold Hold Down  
Capscrews-----

Ft. Lbs.		per In.	CC-7
25	1/2	13	NC
15	5/16	18	NC

**WATER PUMP AND THERMOSTAT**

Type of System ----- Pressurized Thermostat Controlled  
By-Pass Type; Forced Circulation(Pump).

Type Pump ----- Impeller Vane Type

Temperature Control ----- By-Pass Type Thermostat

Oil Filter Mounting  
Capscrews -----

Oil Pan Capscrews-----

Rocker Arm Bracket Studs  
and Capscrews-----

Water Pump and Fan Shaft  
Nut-----

25	3/8	16	NC
10	3/8	16	NC
40	7/16	14	NC
60	5/8	18	NF
25	3/8	16	NC

**FUEL SYSTEM**

Type of System----- Gravity Flow

Carburetor -----Zenith Series 62

Float Level ----- 1-39/64 Inch from Machined Surface  
of Cover to Top Surface of the Float.

Load Jet----- Adjustable

Venturi Size ----- 1.220 Inch Dia. Throat

Flange ----- SAE 1-1/2 Inch

Water Pump Mounting  
Capscrews-----

**Loader**      **Torque in**      **Size**      **Threads**      **Type**  
                         **Ft. Lbs.**                      **per In.**

Converter Housing to Fly-  
Wheel Housing-----

Transmission Mounting  
Brackets -----

30	3/8	16	NC
100	5/8	11	NC

Transmission Bracket to  
Frame -----

Steering Gear to Frame---

200	3/4	16	NF
155	5/8	11	NC

Hydraulic Pump Mounting--

Hydraulic Valve Mounting  
Capscrews-----

50	1/2	13	NC
25	1/2	20	NF

Lift Cylinder Head  
Capscrews-----

140	5/8	18	NF
-----	-----	----	----

Lift Cylinder Piston  
Rod Nut -----

300	1-1/4	12	NF
-----	-------	----	----

Tilt Cylinder Head  
Capscrews -----

90	1/2	20	NF
----	-----	----	----

Tilt Cylinder Piston Rod  
Nut -----

175	1	14	NF
-----	---	----	----

Axle Mounting Bolts -----

(W-9 Series B only)

400	3/4	16	NF
625	7/8	14	NF
950	1	14	NF
550	1	14	NF

Wheel Mounting Nuts-----

NOTE: The above Specifications  
are given in foot pounds dry torque.

250	3/4	16	NF
-----	-----	----	----

\*NF - National Fine  
\*\*NC - National Coarse







**TIGHTENING TORQUE SPECIFICATIONS**

Engine	Torque in Ft. Lbs.	Size	Threads per In.	Type
Camshaft Nut -----	125	1-1/8	12	NF*
Connecting Rod Bearing Capscrews-----	95 to 105	1/2	20	NF
Crankshaft Pulley Bolt----	100	5/8	18	NF
Cylinder Head Cover (Valve Cover)Stud Nuts----	5 Max.	7/16	20	NF
Cylinder Head Stud Nuts---	120 to 125	9/16	18	NF
Cylinder Head Bolts (Grade 8)-----	145 to 150	9/16	18	NF
Engine to Flywheel Housing- Dust Cover and Capscrews-----	80	1/2	20	NF
Flywheel to Crankshaft Capscrews-----	100	5/8	18	NF
		9/16	18	NF
Engine Mount-----	200 400	5/8	18	NF
		3/4(rubber mounted)	16	NF
		3/4(spring mounted)	16	NF
Generator Mounting Capscrews -----	15	5/16	18	NC
<b>Injectors, Diesel Fuel</b>				
Clamp Stud Nuts, Injector to Cylinder Head (Diesel)-----	14 to 17	3/8	24	NF
Injector Nozzle Cap Nut (Diesel)-----	50 to 55			
Powrcel Clamp Screws (Diesel)-----	100	1-1/8	16	NC
Mainbearing Capscrews--	145 to 155	5/8	11	NC
<b>Manifolds</b>				
Manifold Clamp Stud Nuts-----	25	7/16	20	NF

## GENERAL TORQUE SPECIFICATION TABLE (Revised 5-64)

**USE THE FOLLOWING TORQUES WHEN SPECIAL TORQUES ARE NOT GIVEN**

**NOTE:** These values apply to fasteners as received from supplier, dry, or when lubricated with normal engine oil. They do not apply if special graphited or moly-disulphide greases or other extreme pressure lubricants are used. This applies to both UNF and UNC threads.

SAE Grade No.	5		8 *			
Bolt head identification marks as per grade Note: Manufacturing Marks Will Vary						
	Torque Foot Pounds			Torque Foot Pounds		
Bolt Size	Min.	Max.	Min.	Max.		
1/4"	9	11	12	15		
5/16	15	18	24	28		
3/8	35	40	45	50		
7/16	54	60	70	80		
1/2	80	90	110	125		
9/16	110	120	160	180		
5/8	150	165	220	240		
3/4	260	280	380	420		
7/8	360	400	600	660		
1"	540	600	900	1000		
1-1/8	720	800	1280	1440		
1-1/4	1000	1100	1800	2000		
1-3/8	1460	1680	2380	2720		
1-1/2	1940	2200	3160	3560		

\* Thick nuts must be used with Grade 8 bolts

### TIMING CHART

ENGINE	FULL LOAD GOVERNED ENGINE SPEED	NUMBER OF DEGREES
(W8B) A401D (W9B) (W10B)	2000	33° BTDC
A401D (W10)	1800	31° BTDC
A451D (W12)	2000	31° BTDC
(W8B) A377G (W9B) (W10B)	2000	4° BTDC (Static) 28° BTDC (Running at 2000 RPM)

### VALVE TIMING

With valve clearances set correctly, dial indicator mounted above valve stem, reading taken with valve .040" off its seat.

A401D Inlet Opening (No. 1 Cyl.) ----- 3° BTC  
 A377G Inlet Opening (No. 1 Cyl.) ----- 6° ATC

"Inlet opening" is the only position on these engines that can be checked by the crankshaft pulley marks. Since the crankshaft pulley is only marked to 5° ATC, the 6° ATC mark will have to be measured and scribed on the pulley. Use the degree marks already on the pulley for measurement. If this position is correct, it can be assumed that the timing gears are correctly marked and properly assembled.

NOTE: The J I Case Company reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

**SECTION**

**K**

**SERVICING THE**



**CYLINDER HEADS**



**VALVE SYSTEMS**



**ROCKER ARMS**



**DECOMPRESSOR**

**ON**

**CASE POWRCEL DIESEL ENGINES**

## TABLE OF CONTENTS

CYLINDER HEAD AND COMPONENTS - Disassembly and Installation . . . . .	K-2 thru K-5
DECOMPRESSOR (If So Equipped) - Disassembly and Assembly . . . . .	K-6
ROCKER ARMS AND SHAFTS - Disassembly, Inspection and Assembly . . . . .	K-8
CYLINDER HEAD AND VALVES - Disassembly and Assembly . . . . .	K-10
EXHAUST VALVE ROTATORS . . . . .	K-10
VALVES, GUIDES AND SPRINGS - Inspection . . . . .	K-12
INTAKE AND EXHAUST VALVES - Refacing . . . . .	K-14
INTAKE AND EXHAUST VALVE SEATS - Grinding . . . . .	K-15
LOCATING TOP DEAD CENTER AND TAPPET ADJUSTMENT . . . . .	K-16

## CYLINDER HEAD AND COMPONENTS

(Refer to Figure K-1)

### Removal

Steam clean the engine completely before doing any disassembly or service work.

Drain cooling system. Remove the intake, exhaust and water manifolds. Remove the rocker arm covers. Disconnect and remove the decompressor if so equipped, Page K-6.

Remove the rocker arm assemblies and tag them for proper installation. (Refer to Page K-8.

Disconnect the high pressure fuel lines to

the injectors and cap them. Disconnect the fuel leak-off tubes between each cylinder head and cap them.

Remove the push rods and tag or store them in a holder or rack so they can be installed in their same locations.

Remove the cylinder head bolts or nuts and lift the heads off the engine. Remove the head gaskets and discard them.

### Inspection and Installation

Remove all carbon and clean all parts before installation.

#### STANDARD HEAD GASKETS

If you are installing the standard gasket, install the new gasket with new rubber seals. The gasket must be installed with either the copper side up or the side with the case part number up. Continued on Page K-5.

#### FIRE RING HEAD GASKETS







If you are installing the fire ring head gasket, inset B, cylinder sleeve protrusion

must be checked to determine which fire ring to install. Only the standard fire ring is included in the valve grind gasket kit, however a thicker fire ring (.004") is available if the protrusion checks indicate a need for it. The thicker fire ring can be identified by a blue marking stripe.

Refer to Pages K-4 and K-5 for the procedure to follow when installing the fire ring cylinder head gasket.

# REMOVAL AND INSTALLATION OF CYLINDER HEAD AND COMPONENTS


**CAUTION**  
DO NOT OVER  
TIGHTEN COVER NUTS

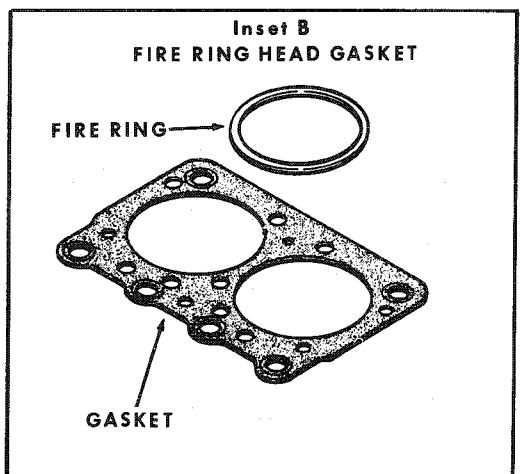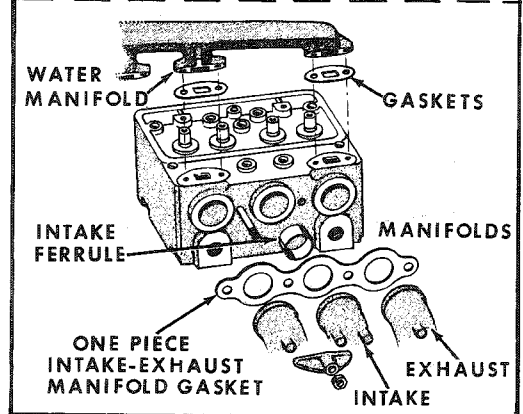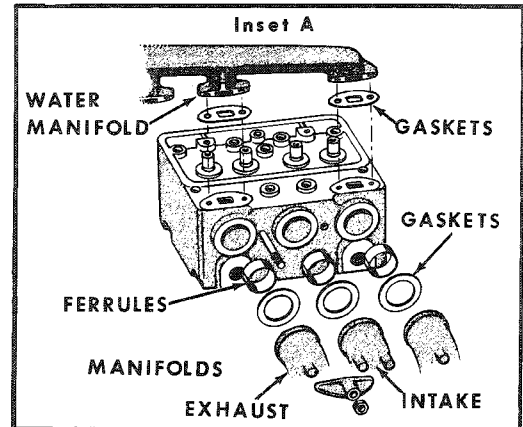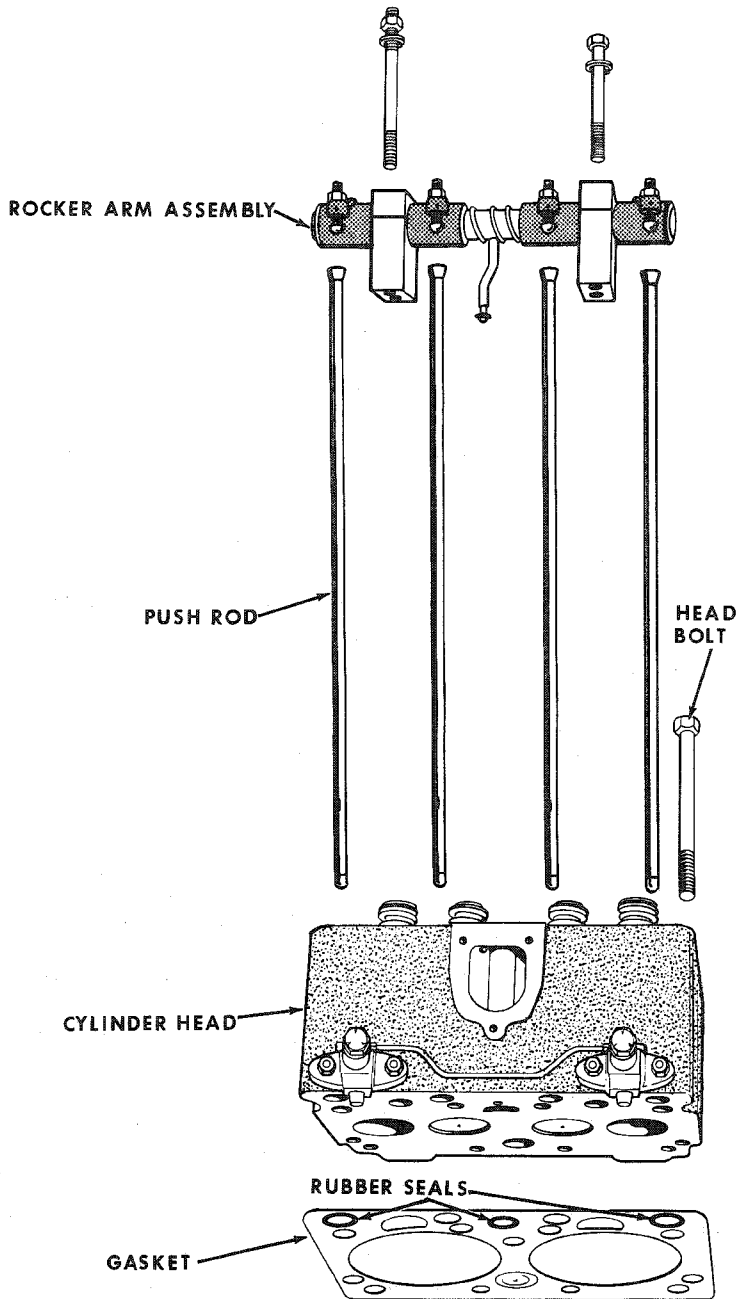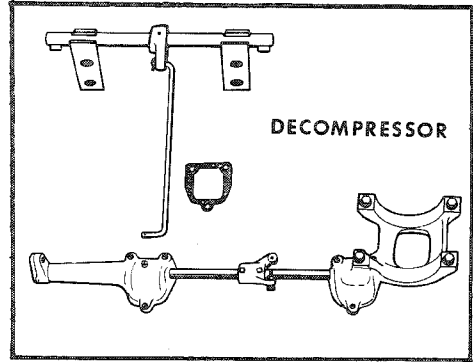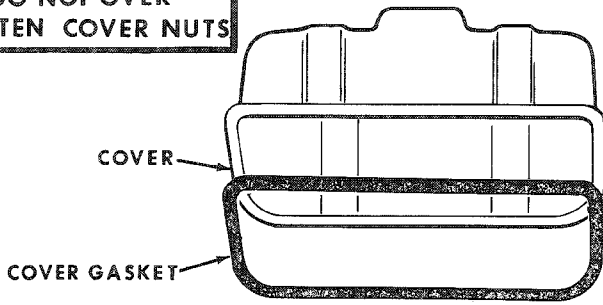

## Inspection and Installation Fire Ring Gaskets (Continued)

The following procedure must be followed when installing the fire ring head gasket:

1. Clean the top surface of the block and sleeve flange carefully. All traces of carbon and other deposits must be removed. During the final cleaning operation, the use of a rag dampened in solvent is recommended.
2. Using a small stone, remove any small burrs in the areas to be measured so that accurate readings can be obtained.

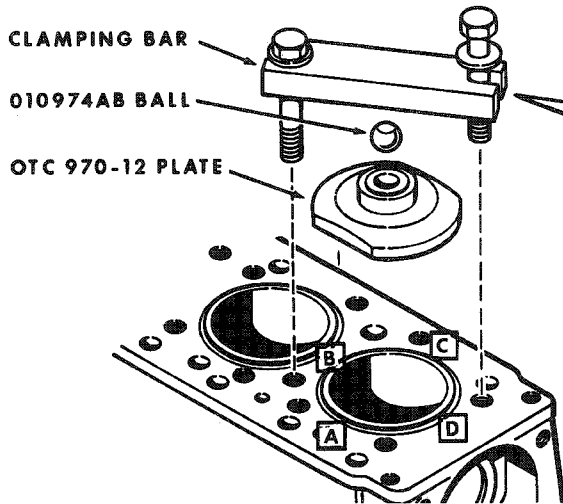

MEASURE SLEEVE PROTRUSION AT POINTS A, B, C, AND D.

Figure K-2

4. Either a magnetic base dial indicator or a depth micrometer can now be used to determine the cylinder sleeve protrusion as indicated in Figure K-3. Refer to chart, Figure K-5, to make sure the correct fire ring is used.


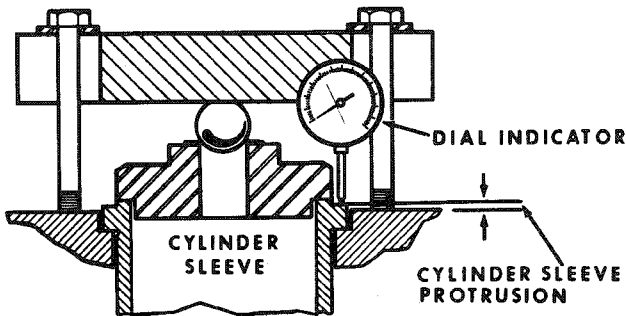


Figure K-3

5. Install cylinder head gaskets. **IMPORTANT** Two of the capscrew holes in the gasket are slightly smaller and act as guides to position the gasket as well as the fire ring,

3. Using plate OTC970-12\* from cylinder sleeve puller OTC970\*, 010974AB ball and clamping bar, clamp the cylinder sleeve in place, Figure K-2. Torque the hold down capscrews evenly to 50 foot pounds. **NOTE** Refer to Figure K-2 for clamping bar dimensions.

\*These tools are available through local Owatonna Tool Dealers or the Owatonna Tool Co., Owatonna, Minnesota.

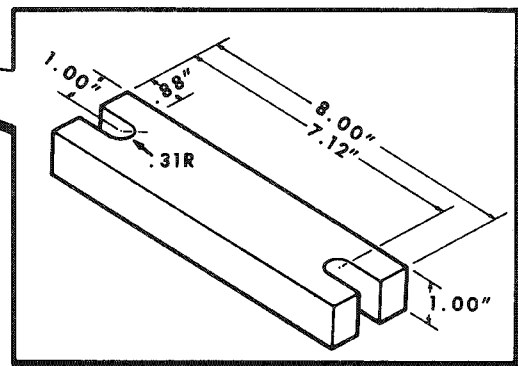

- Figure K-4. Regular line-up studs could be used for most engines. In some instances it is very difficult to install the

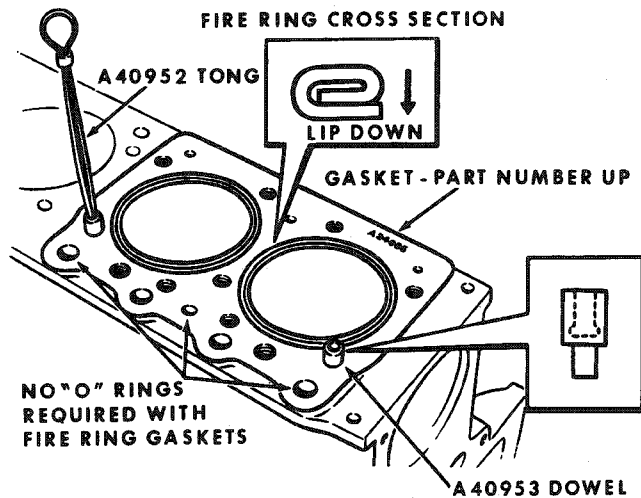


Figure K-4

rear cylinder head due to the limited space in which to place the head when lowering it down over the long guide studs.

## Inspection and Installation(Continued)

CYLINDER SLEEVE PROTRUSION	USE STANDARD FIRE RING	USE OVERSIZE (THICKNESS) FIRE RING
BOTH SLEEVES UNDER ONE HEAD FLUSH TO .002"		X
BOTH SLEEVES UNDER ONE HEAD .002" OR OVER BUT LESS THAN .0025" BETWEEN SLEEVES	X	
BOTH SLEEVES UNDER ONE HEAD OVER .0025" DIFFERENCE BETWEEN SLEEVES	ON THE HIGH SLEEVE	ON THE LOW SLEEVE

Figure K-5

6. For difficult installations, the use of dowel pins and a tong are recommended and can be purchased through a local Snap-On Tool Dealer or J.I. Case Central Parts Dept. under the following part numbers.

Snap-On Tool No.	Case Part No.
CF83-1 Tong	A40952
CF83-4 Dowel	A40953

7. Install the fire rings with the lip downwards, Figure K-4. **NOTE** Fire ring gaskets must be installed dry.

8. Carefully clean the cylinder heads as described in No. 1. If evidence of fretting or erosion exist in the area of the fire ring contact or if the head is warped more than .005", the head must be resurfaced.

9. Install cylinder heads and several bolts, then remove the A40953 dowels using A40952 tong and install all the bolts.


### STANDARD AND FIRE RING HEAD GASKETS

10. Install intake and exhaust manifold ferrules and new gaskets. **NOTE** When the manifolds are designed for the one piece manifold gasket, the ferrules are used only in the intake ports. Refer to Page K-3, inset A. Install the intake and exhaust manifolds and torque to proper torque. Refer to Specification Section.

11. Torque cylinder head bolts or nuts to the proper sequence illustrated in Figure K-6. The three torquing steps recommended are 50 foot pounds, 100 foot pounds and finally 150 foot pounds.

12. Install the push rods in their original location. Connect the high pressure fuel lines and leak-off tubes. Install the de-

compressor (if so equipped.) Refer to Page K-16 for proper firing order.

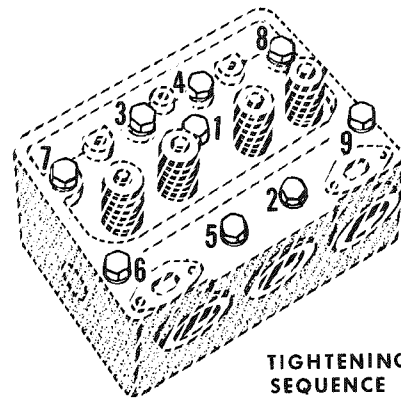

**TIGHTENING SEQUENCE**

Figure K-6

13. Install the rocker arm assemblies in their original location.

14. Adjust the valve tappet clearance, refer to Page K-16.

15. Fill cooling system and start engine. Check that the rocker arms are receiving lubrication.

16. Run engine for approximately one (1) hour, under load if possible, to thoroughly warm up the engine and seat the head gaskets.

17. Stop the engine and retorque the cylinder head bolts or nuts to 150 foot pounds while the engine is still hot. Check and readjust the tappets.

18. Clean the rocker arm covers and remove the old gasket. Install new gaskets and seals; then install covers. Refer to Specification Section for proper torque. Do not over torque the valve cover nuts.

## **INSPECTION OF DECOMPRESSOR**

**(If So Equipped)**

**(Refer to Figure K-7)**

When the decompressor is engaged all the exhaust valves must be held in an open position. Inspect the trip pins for excessive wear. Inspect for bent or worn control linkage if the valves are not held open.

When the decompressor is disengaged and the tappet clearance is correct be sure the trip pins release the rocker arms completely. Inspect for loose coupling set screws, bent or worn control linkage, control link cotter pin missing or a pin in one of the control levers sheared off.

## **DISASSEMBLY OF DECOMPRESSOR**

**(Refer to Figure K-7)**

Remove the control link cotter pins (1) and link (2). Remove the decompressor control housings (3) and the housing gaskets (4). Loosen the coupling set screws (5) and remove the coupling (6).

Remove the roll pins (7) from the control

levers (8). Remove the control shafts (9) from the housings. Remove the control levers (8). Remove the trip pins (10) from the decompressor shaft (11). Remove and discard the "O" rings (12) from the shafts.

## **ASSEMBLY**

**(Refer to Figure K-7)**

Install the trip pins (10) and lever (8) with roll pin (7) to the decompressor mounting brackets (13). Install the new "O" rings (12) on the shafts - Install the shafts (9) into the housings (3) and install the control levers (8) with roll pins (7). Install the shaft coupl-

ing (6) and tighten square head set screws (5).

Install the housing and shaft assembly to the cylinder heads with new gaskets (4). Install the control link (2) with cotter pins (1).

## **DECOMPRESSOR ADJUSTMENTS**

**(Refer to Figure K-7)**

The stop bolts (14) in the coupling stop (6) should be adjusted so the decompressor can open the valves when engaged and lift the trip pins so they are clear of the rocker arms when disengaged (Refer to Inset A). Tighten the lock nuts (15) on the stop bolts (14) after adjustment is made.



# DISASSEMBLY AND ASSEMBLY OF DECOMPRESSOR

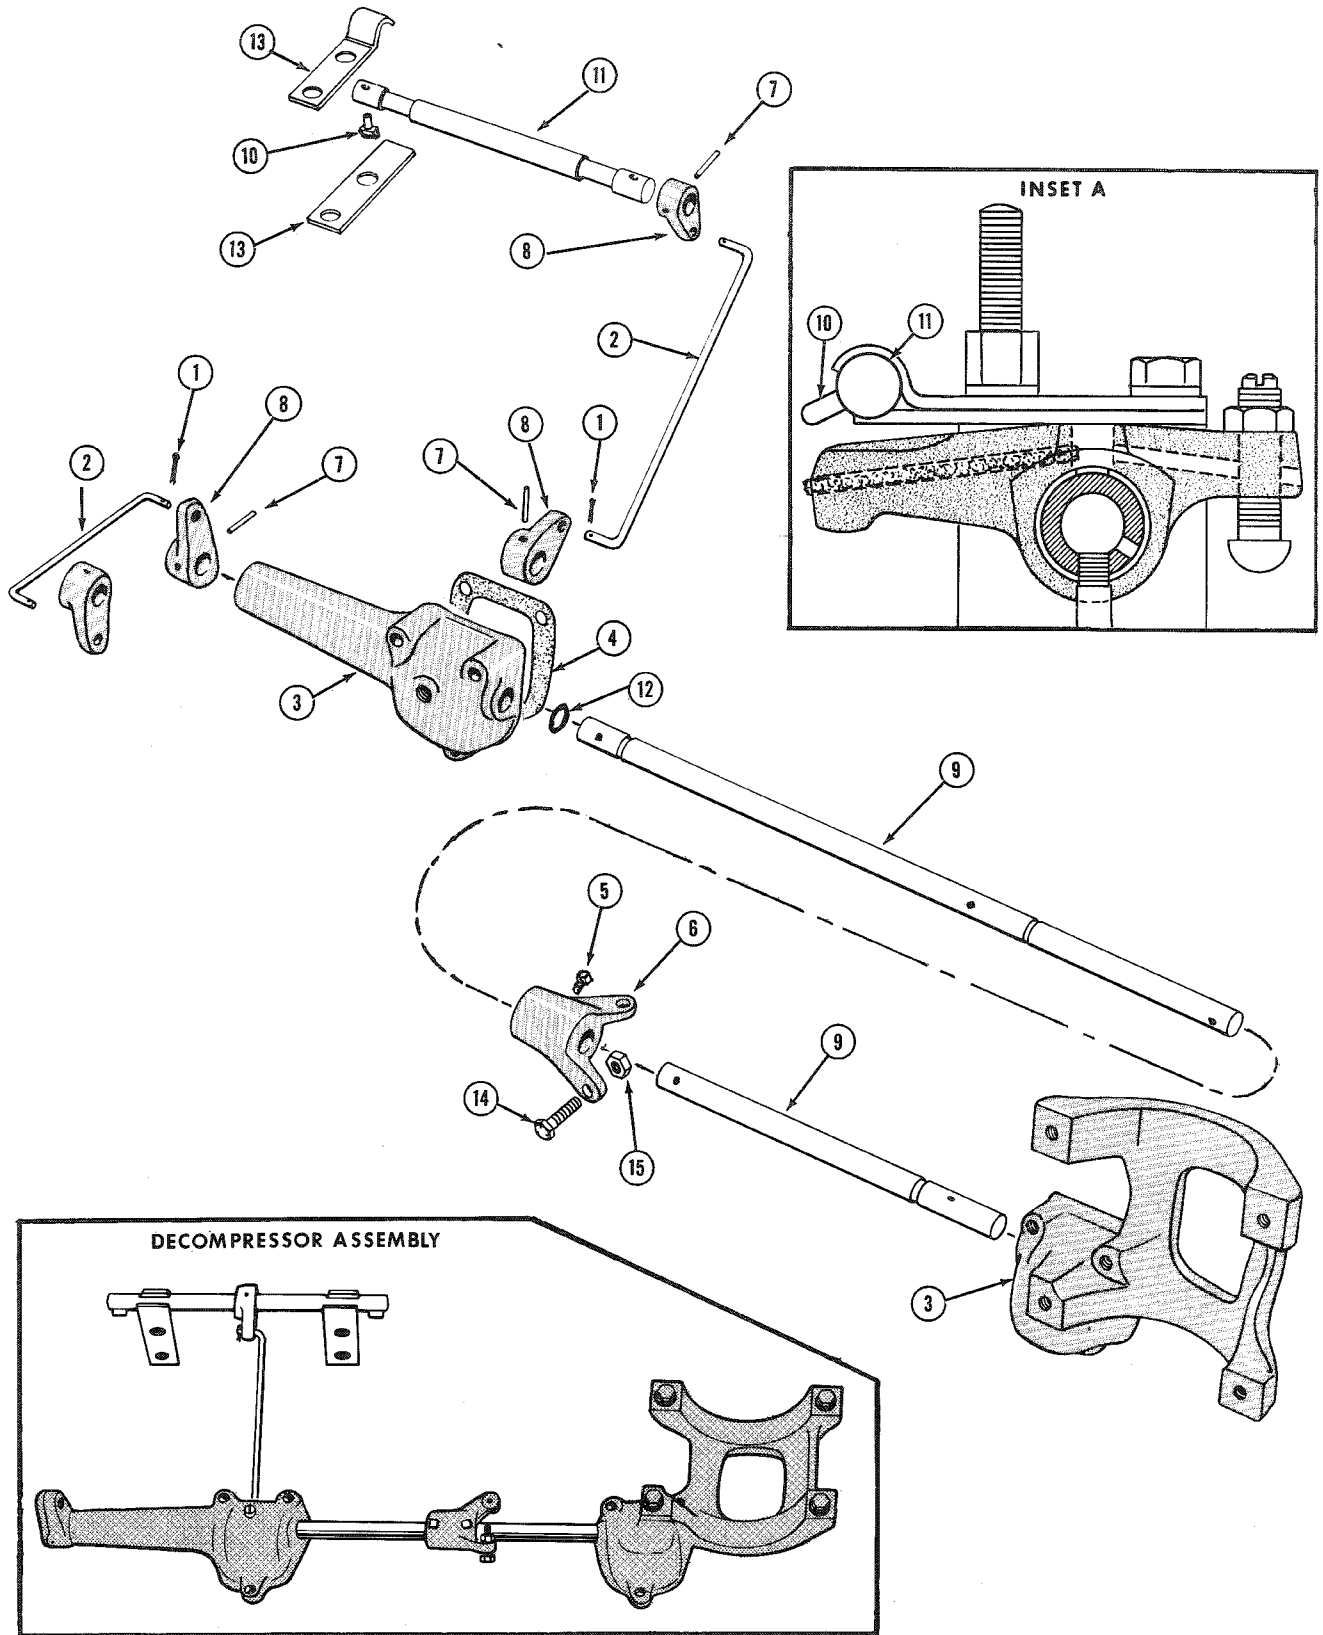


Figure K-7

## **DISASSEMBLY OF THE ROCKER ARMS**

### **(Refer to Figure K-8)**

Remove the rocker arm shaft bracket studs (15) and bolts (16). Remove and tag shaft assemblies for installation.

Unscrew the oil tube (1) and discard the "O" ring (2). Remove the snap rings (3), spacer washer (5) and keep count of the number of washers at each end of the shaft. Tag each rocker arm for original location. Remove the exhaust rocker arms (6) and the shaft brackets (7) from each end of the shaft.

Remove the intake rocker arms (8) and the shaft spring (9). Remove the plugs (10) by

using a rod and driving one plug clear thru the shaft. This will also clean out the dirt or sludge that has formed inside of the shaft.

Replacement shafts have these plugs installed at the factory. Remove the push rods and store them in a rack or holder so they can be installed in their original location.

Remove the oil wick (11) from each exhaust rocker arm and discard. Remove the bushing (12) from the cast rocker arm if it is worn using an Arbor (See Inset A).

## **INSPECTION**

### **(Refer to Figure K-8)**

Inspect the shaft spring for proper tension and broken coils. Refer to "Specification" Section. Inspect the rocker arm shaft for excessive worn spots on the bottom side of the shaft. Replace shaft if worn condition exists.

Inspect the rocker arm bushings by installing each rocker arm on the shaft in its proper location. The rocker arm must be free on the shaft without any side "wobble" If any is noted replace the cast rocker arm

bushing or replace the stamped rocker arm. Note the stamped rocker arm bushing is not replaceable. Replacement rocker arms come complete with bushings. Inspect the valve contact area on the rocker arm for wear. Replace if worn. Inspect the tappet adjusting screw for wear marks or pitting. Inspect the push rods for straightness, cracked or worn ends.

## **ASSEMBLY**

### **(Refer to Figure K-8)**

Clean all parts thoroughly. Place new bushing on Arbor and press into the cast rocker arm so the bushing (12) is evenly centered in the rocker arm and the oil hole is lined up with the oil hole in the rocker arm, (See Inset A). Check the bushing for high or rough spots and if they exist, they should be honed out. Install new oil wick (11) in the exhaust rocker arm. Lubricate each part with engine oil as they are installed.

Install a shaft spring (9) and two intake rocker arms (8) on the shaft (4). When installing the cast rocker arms the adjusting screw and the shaft oil hole must be on the same side, (See Inset A).

When installing the stamped steel rocker arms the adjusting screw and the shaft oil hole must be on opposite sides (See inset B).

Install the shaft brackets (7) on the shaft with the split side toward the push rod side of the engine. Install the exhaust rocker arms

(6) on the shaft. Install the same number of spacer washers (5) that were removed.

Install the snap rings (3) at each end of the shaft. Check the rocker arms for free movement. Install the oil tube (1) with new "O" ring (2). Install the push rods in their original location if they were removed. Install the adjusting screws (13) and lock nuts (14) if they were removed.

Install the rocker arm and shaft assembly on the cylinder head. Make sure all the push rods are engaged with the adjusting screws. Install the bracket studs (15) and bolts (16). Refer to "Specification" Section for proper torque. Check that the oil tube is in the oil hole in the cylinder head. Check exhaust rocker arms for excessive end play. One or more spacer washers can be used between the rocker arm and snap ring to remove the excessive end play. Check and adjust the tappet clearance. (Refer to Page K-16.)

# DISASSEMBLY AND ASSEMBLY OF THE ROCKER ARMS

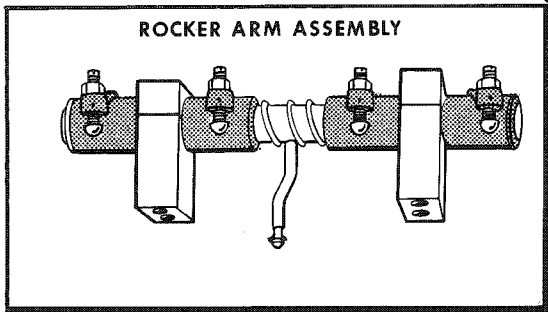
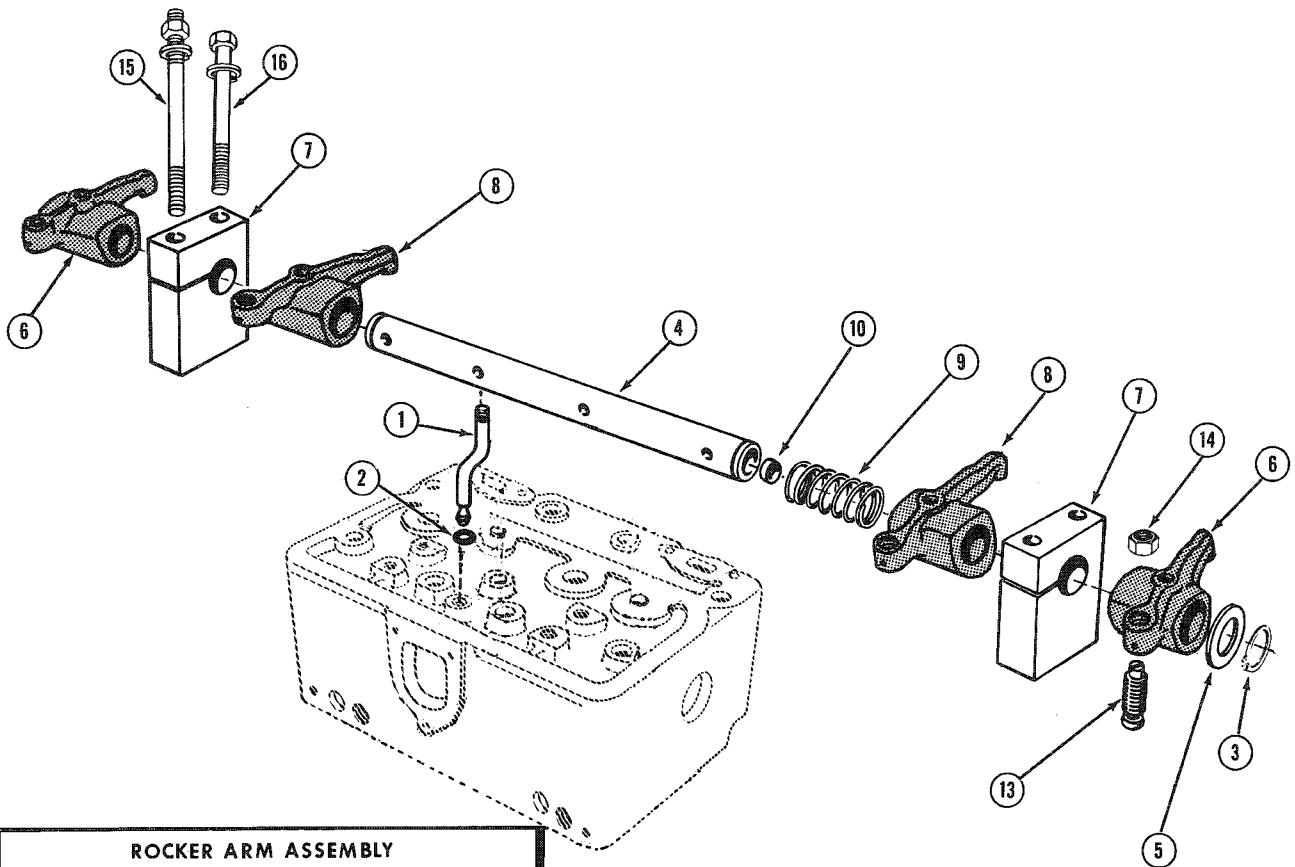
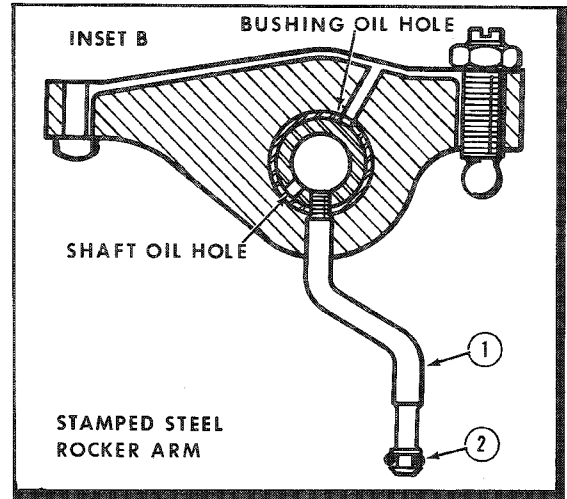
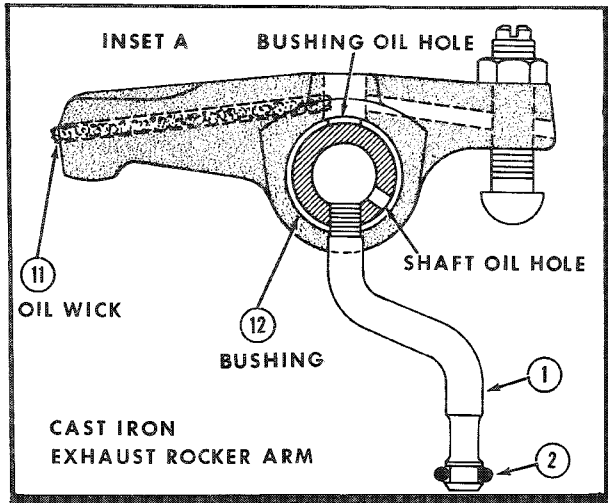


Figure K-8

## DISASSEMBLY OF THE CYLINDER HEAD AND VALVES (Refer to Figure K-9)

Using a valve spring compressor (Refer to Inset A) compress the spring (1). Remove the valve retainer locks (2) and the spring retainers (3) or valve rotators (4). Remove the valve springs (1), valve stem oil seal (5) and the valve spring seat. Remove any carbon from the valve stems before they are moved from the head.

Remove the intake valves (7) and the exhaust valves (8) from the head and store them in a rack or holder. Remove the intake valve guide (9) exhaust valve guide (10)

down through head using an Arbor (See Inset B). Refer to "Specification" Section for dimension of valve guides. The exhaust valve seats (11) can be removed with a special seat removing tool (See Inset C).

**NOTE** Never attempt to remove a valve seat with a center punch, cold chisel or pry bar.

To remove the expansion plug (12) it must be drilled and then pryed out.

## ASSEMBLY (Refer to Figure K-9)

Clean head completely and check for cracks. Remove all carbon from the bore of the valve guides with a wire brush and blow out with compressed air.

Install new valve guides (9 and 10) using an Arbor (See Inset B) and press the guides into the head from the top of the head. The distance the guides must protrude above the head is given in the "Specification" Section.

To install new exhaust valve seats (11) clean the recess in the cylinder head. Place the valve seats in dry ice to shrink them for easy installation. Insert the valve seats in the head and drive them in place using suitable driver. Lubricate the valves (7 and 8)

with engine oil and install them in the original location.

Install the valve spring seats (6), valve springs (1) and intake valve stem oil seal (5). Install the exhaust valve rotators (4) and the intake valve spring retainers (3). Compress the valve springs so the valve retainer locks (2) can be installed.

Install new expansion plug (12). Refer to Page K-2 for reinstalling the cylinder head.

## EXHAUST VALVE ROTATOR (Refer to Figure K-9)

When re-installing the rocker arm assembly, check the operation of the exhaust valve rotators. To check the operation of the rotators, place a dab of white paint on the rotator - note its position; -- then start the engine and observe whether or not the rotator is turning. Replace any rotators that will not turn. Do not attempt repairs on rotators.

It is impossible to determine whether or not the rotator is turning without an identifying mark.

There is no set speed at which the rotators should turn; some rotators will turn faster than others. As long as the rotator is turning the valve, it is functioning properly.

### **NOTE**

An excessive accumulation of deposits on the exhaust valve face and stem is also an indication that the rotators may not be functioning properly.

### **IMPORTANT**

When installing valve rotators:

Reassemble the rotator with original valve as they tend to become matched parts when they wear in.

If it is necessary to install a new valve always install a new rotator and retaining lock.

# DISASSEMBLY AND ASSEMBLY OF THE CYLINDER HEAD AND VALVES





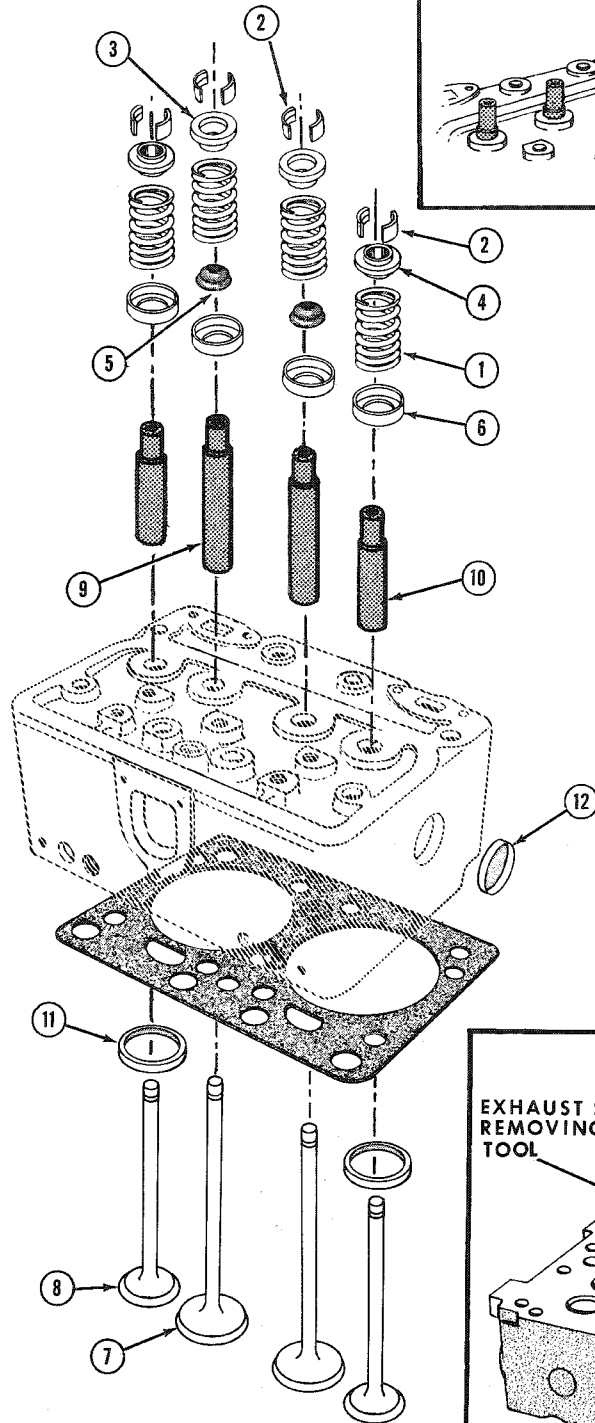


Figure K-9

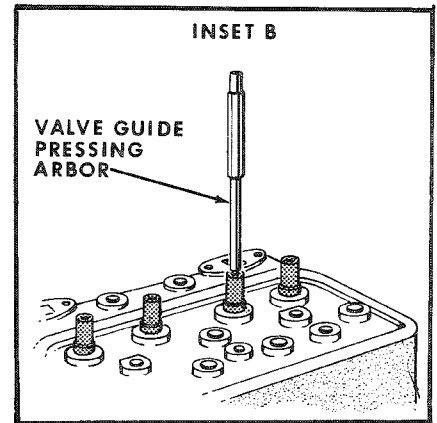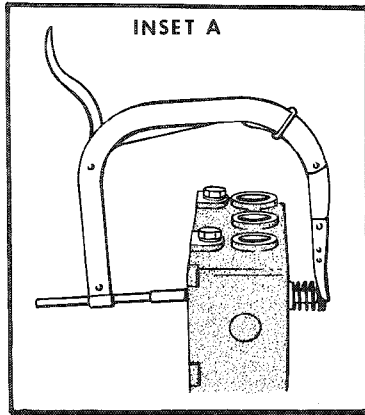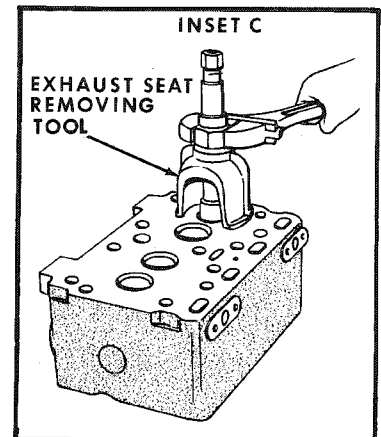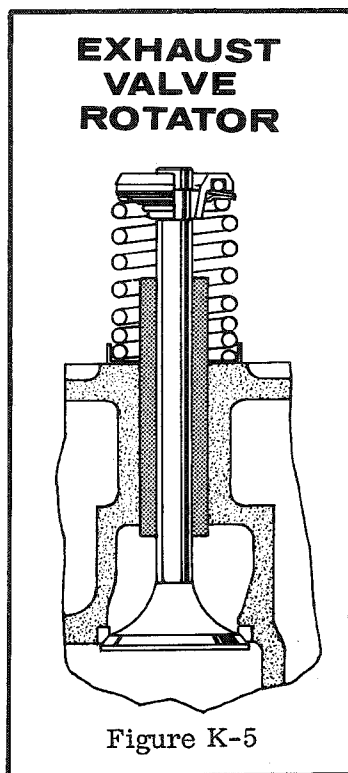

## INSPECTION OF THE VALVES, GUIDES AND SPRINGS

Valve springs should be checked for flat squared ends, broken or cracked coils and correct spring pressure. Use a Valve Spring Tension Tester. Refer to the "Specification" Section.

Valve guides can be checked for wear by using a bore gauge and micrometer (Refer to Figure K-11.) The valve guide should be checked at the top, middle and bottom of the bore for wear. Refer to Figure 10. The inside diameter wear limits of the valve guide should not exceed the specification given in the "Specification" Section, at any point along the bore of the guide. Replace guide if it does. Check the new valve guides after installation to make sure that the bore is not less than the inside diameter given in the "Specification" Section. Using an Arbor equal to the inside diameter of the valve guide will keep the guide from collapsing when pressed in place.

Clean the valves with a power driven fine wire brush, being very careful not to scratch the valve stems. Reference is made to the different parts of the valve (Refer to Figure K-12.)

Inspect the valves for excessive wear or necked stems (Refer to Figure K-13). This can be caused by lack of lubrication, plugged or dirty water passages or operating the engine under continuous overload at excessive engine RPM. Valves should be replaced.

Inspect the valves for deep grooves in the face (Refer to Figure K-14.) This can be caused by abrasives entering the engine through the intake system or not servicing the air cleaner regularly. A leaking valve cover gasket can also cause this condition. If grinding the valve face will not correct this condition, discard the valves.

Inspect the valve face and stem for rust or pitting (Refer to Figure K-15). Rust or pitting can usually be removed by grinding the valve face. If rust or pitting on the valve stem exist the valve should be replaced. These conditions can be caused by using poor quality engine oil or fuel that doesn't meet the specification given in the Operator's Manual. Rust could be caused by improper storing of the engine.

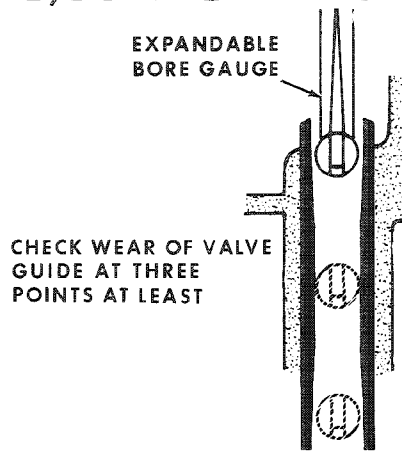


Figure K-10

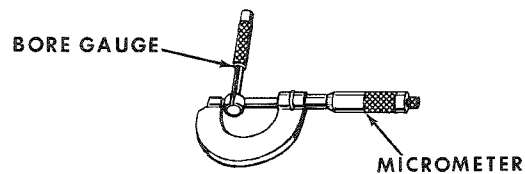


Figure K-11

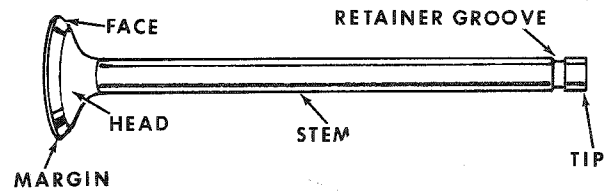


Figure K-12

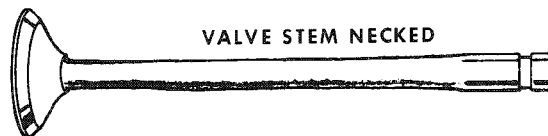


Figure K-13



Figure K-14

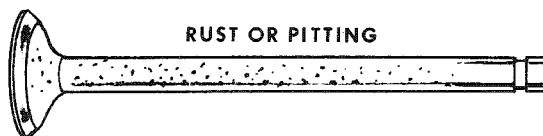


Figure K-15

## INSPECTION OF THE VALVES, GUIDES AND SPRINGS (Contd)

Heavy carbon or varnish deposits on the valve (Refer to Figure K-16) should be removed before valves are ground. This condition is usually caused by worn piston rings and sleeves which allow too much oil to reach the combustion chamber. This condition could also be caused by worn valve guides or no seals on the intake valves. Low operating temperature is still another cause. These conditions should be corrected or the same trouble with the valves will happen again.

Inspect the valve head for dishing and the valve face for deep burned spots, Figure K-17. These conditions can't be corrected by grinding the valves. The valves should be replaced. These conditions are usually caused by running the engine under excessive load at high engine temperatures.

Valves with worn keeper grooves or the stem is worn or dished beyond the chamfer must be replaced (Refer to Figure K-18).

The checking of the valve stem diameter can best be done with a good accurate micrometer (Refer to Figure K-19). The valve stem should not vary more than the wear limits given in the "Specification" Section at any point on the valve stem. If this condition exists the valves must be replaced.

The checking of the valve face runout should be done after the valves have been ground. A Vee block type holder with a dial indicator (Refer to Figure K-20) should be used to check the valve face runout. The valve face should not vary more than the specification given in the "Specification" Section. The valve stem runout can also be checked with this Vee block and dial indicator.

### IMPORTANT

Small amounts of very fine pitting, Figure K-21, may be found on the surfaces of the valve faces and seats after the valves are cleaned. These are normal and will not affect engine performance. This fine pitting is caused by a normal oxidation process and can happen on any engine during the run-in period. It is not necessary to grind valves or seats if this fine pitting is found as the pitting will generally reoccur after the engine is run for a few hours.

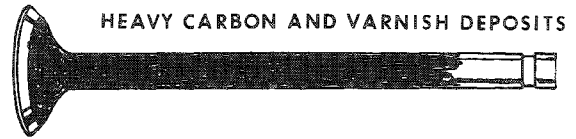


Figure K-16

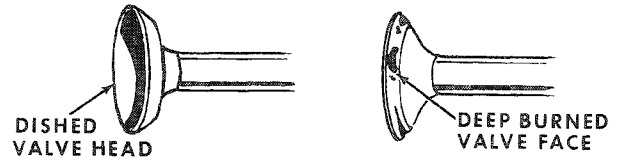


Figure K-17



Figure K-18

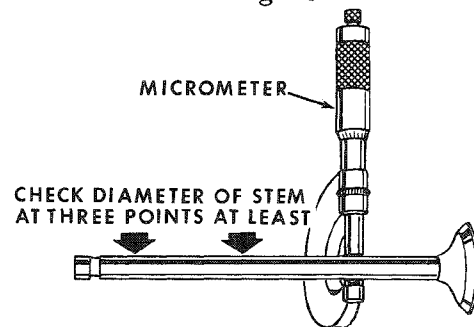


Figure K-19

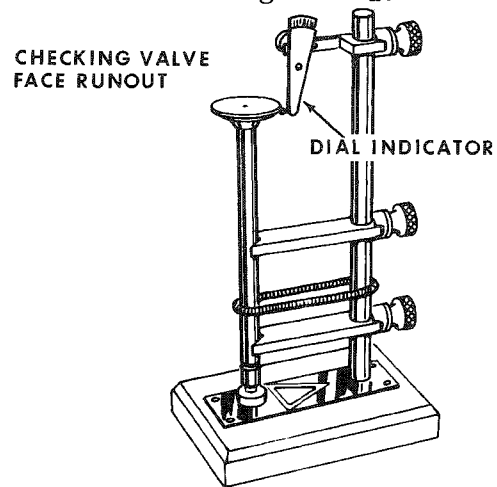


Figure K-20



Figure K-21

## REFACING INTAKE AND EXHAUST VALVES

Before refacing the valves they should be wire brushed, cleaned and inspected. Refer to the "Specification" Section for the correct valve face grinding angle. Set the refacing machine protractor at this angle. Be sure the chuck of the machine is clean before installing valve. Dress the grinding wheel before starting to reface each valve. Take only light cuts as the valve is refaced and the last cut must be very fine so the valve face will have a polished finish.

**IMPORTANT** Replace any valve that after grinding has a thin edge or margin (Refer to Figure K-22). If the margin on the ground valve is less than half the margin on a new valve replace the valve.

The tip end of the valve should be checked for roughness or wear. Usually this can be removed with some very light cuts against the side of the grinding wheel and will square up the end. Never grind the chamfer off the valve stem end. Any excessive grinding should not be done to the stem end. Replace the valve.

Before installing new valves a fine finish grinding should be done to each new valve. Check the valve face and valve stem runout before installing (Refer to Page 13).

The valve face and seat contact location should be checked. Place valve bluing (Prussian Blue) on the face of the valve. Install the valve in the head and rotate the valve on its seat. Remove the valve and inspect the contact area on the valve face. The bluing will have been removed from the valve face evenly at the top edge of the contact area (Refer to Figure K-23). This is due to the fact that the valve face and seat are ground with 1° INTERFERENCE ANGLE. Refer to "Specification" Section.

When the top edge of the contact area is too high or low on the valve face, the seat contact area must be moved. This is done by using the narrowing stones (Refer to Page K-15). The contact area width should never exceed the dimension given in the "Specification" Section.

**CAUTION** DO NOT USE BLUING TO CHECK VALVE SEAT AND VALVE FACE RUN-OUT.

The valve face could be contacting the seat at only a few points, but the bluing would still be rubbed off by the high points and make it appear as though you had solid contact all around. The only thing bluing will indicate is the location on the valve face where the seat is contacting -- no more!

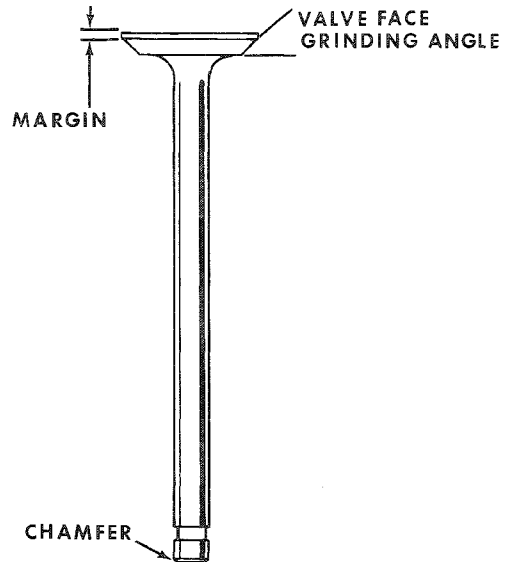


Figure K-22



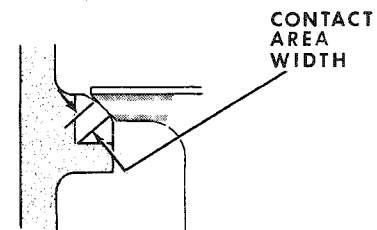


Figure K-23

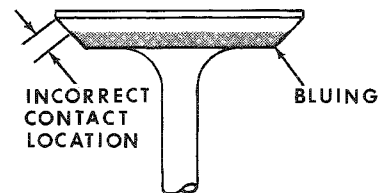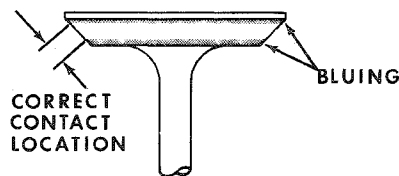

## GRINDING INTAKE AND EXHAUST VALVE SEATS

Always use a precision type power seat grinder similar to the one shown in Figure K-24. The valve seats can not be ground with manual operated equipment. The intake valve seat is part of the head and for this reason only a finishing stone should be used to grind the seat. The exhaust valve seat should be first ground with a roughing stone and then use a finishing stone. Take very light cuts with the grinding stones so just enough metal is removed to end up with a good smooth seat finish.

Refer to the "Specification" Section for the proper specifications of the intake, exhaust seats and valve guides (Refer to Figure K-25). From the specifications the proper grinding stones and pilot can be chosen.

When using the grinding stones the seat grinding angle of the stone should be dressed on a (stone dresser) frequently so the seat angle will not vary when grinding the seats.

### INSPECTION

The valve seat runout should be checked after finish grinding with a dial indicator and seat grinding pilot (Refer to Figure K-26). After checking the runout, turn the pilot 1/4 turn and check runout again. The width of the valve seat contact area must also be checked. Refer to "Specification" Section for dimension of seat width contact area.

The valve seat contact area width should never vary from this dimension. The exhaust valve seat contact area width and location can be changed by using the 30° and 60° narrowing stone. Refer to Figure K-27.

**CAUTION** The intake valve seat should not be changed by using the narrowing stones. If the seat width exceeds the dimension given in the "Specification" Section, the cylinder head should be replaced.

When the step above the intake seat (Refer to Figure K-25) has been reduced by the grinding operation, installing a new valve will help to restore the compression that would normally be lost by excessive grinding of the seat and valves. Excessive grinding of the valves and seats moves the valves further into the head thereby reducing the compression ratio.

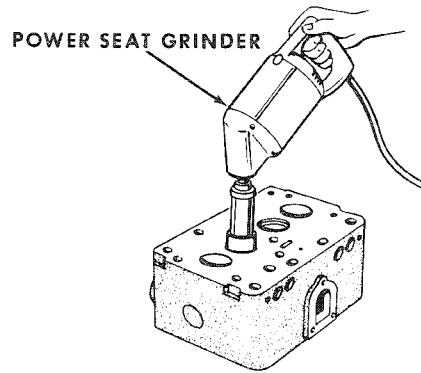


Figure K-24

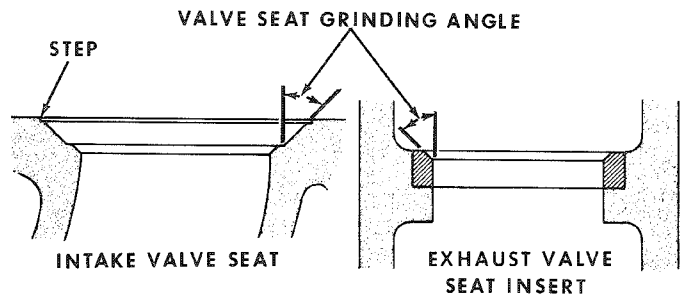


Figure K-25

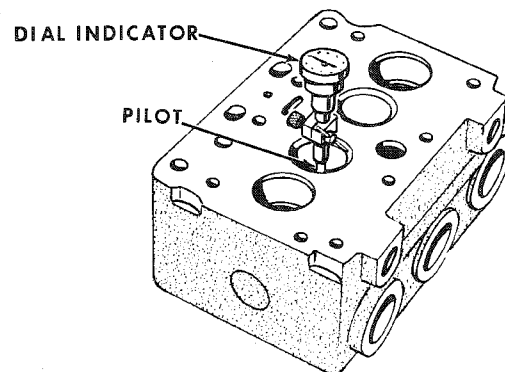


Figure K-26

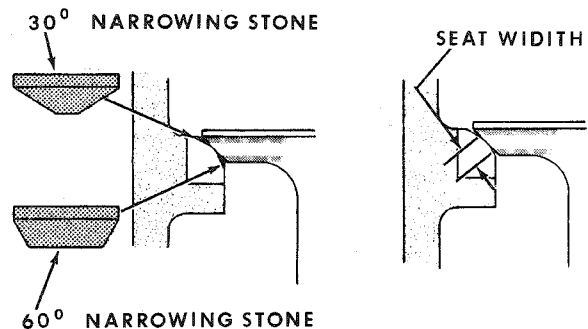


Figure K-27

# LOCATING TOP DEAD CENTER AND TAPPET ADJUSTMENT

Refer to "Specification Section" for the correct tappet clearance.

The two valve tappets for each cylinder are to be checked and adjusted when the piston for that particular cylinder is at topdead center on the compression stroke. Start with the number 1 cylinder (nearest the radiator) and follow the sequence of firing order.

## 4 Cylinder

Firing Order ----- 1-3-4-2

The topdead center position of the pistons for checking valve clearance is indicated by marks on the crankshaft pulley flange. The 4 cylinder engines use the marks 180° apart, Figure K-28.

cylinder No. 2 can be rocked open or closed slightly by crank movement. Adjust tappets on No. 3 Cylinder.

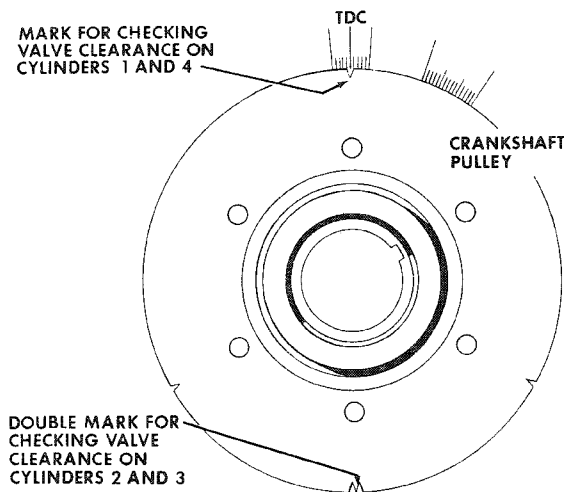


Figure K-28

### NUMBER 1 CYLINDER

To set No. 1 cylinder on top of compression stroke remove the valve covers and crank engine until the push rods are loose on No.1 cylinder (top of compression stroke) and the rocker arms on the opposing cylinder No. 4 can be rocked open or closed with a slight back and forth movement of the crankshaft. Then check and adjust the valve tappets on No. 1 cylinder, refer to Figure K- 29.

### NUMBER 3 CYLINDER

Crank the engine approximately 1/2 turn or until the push rods on No. 3 cylinder are loose and the rocker arms on the opposing

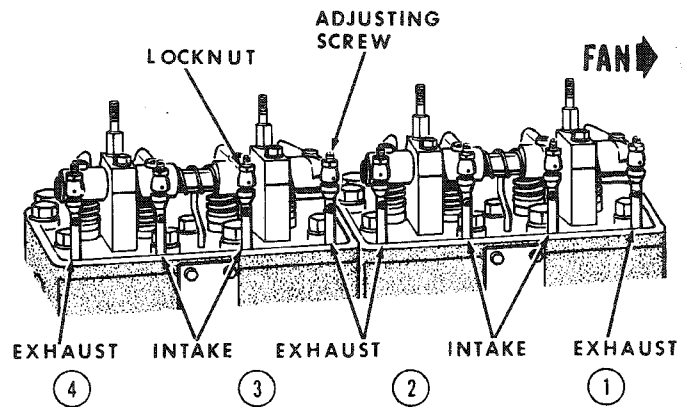


Figure K-29

### NUMBER 4 CYLINDER

Crank engine another 1/2 revolution or until the push rods on No. 4 cylinder are loose and the rocker arms on No. 1 can be rocked open or closed slightly by crank movement. Adjust tappets on No. 4 cylinder.

### NUMBER 2 CYLINDER

Crank engine another 1/2 revolution or until the push rods on No. 2 cylinder are loose and the rocker arms on No. 3 can be rocked open or closed slightly by crank movement. Adjust tappets on No. 2 cylinder.

While the valve covers are removed, start the engine and check that the rocker arm assemblies are receiving proper lubrication; then install new valve cover gaskets and replace valve covers properly to prevent oil leaks.

# LOCATING TOP DEAD-CENTER AND TAPPET ADJUSTMENT

## 6 Cylinder

Firing Order ----- 1-5-3-6-2-4

The top dead center position of Nos. 1 and 6 cylinders is indicated by the TDC mark on the crankshaft pulley flange.

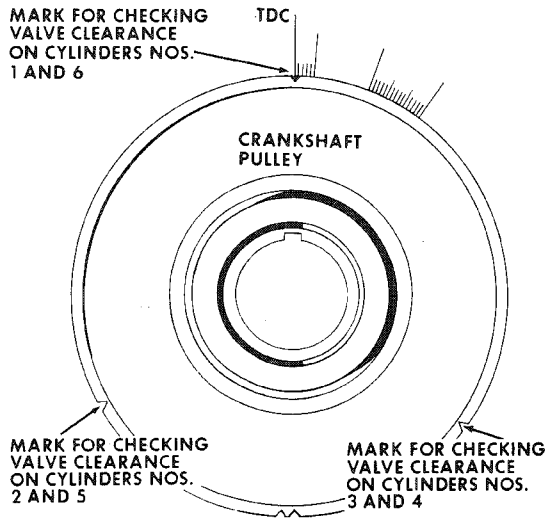


Figure K-30

### NUMBER 1 CYLINDER

To set No. 1 cylinder on top of compression stroke, remove the valve covers and crank engine until the push rods are loose on No. 1 cylinder (top of compression stroke) and the rocker arms on the opposing cylinder No. 6 can be rocked open or closed with a slight movement of the crankshaft. Then crank and adjust the valve tappets on No. 1 cylinder, refer to Figure K-31.

### NUMBER 5 CYLINDER

Crank the engine approximately 1/3 turn or until the push rods on No. 5 are loose and the rocker arms on No. 2 can be rocked open or closed slightly by crank movement. Adjust tappets on No. 5 cylinder.

### NUMBER 3 CYLINDER

Crank engine another 1/3 revolution or until the push rods on No. 3 cylinder are loose and the rocker arms on No. 4 can be rocked open or closed slightly by crank movement. Adjust tappets on No. 3 cylinder.

### NUMBER 6 CYLINDER

Crank engine another 1/3 (TDC mark) revolution or until the push rods on No. 6 are loose and the rocker arms on No. 1 can be rocked open or closed slightly by crank movement. Adjust tappets on No. 6 cylinder.

### NUMBER 2 CYLINDER

Crank engine another 1/3 revolution or until the push rods on No. 2 cylinder are loose and the rocker arms on No. 5 can be rocked open or closed slightly by crank movement. Adjust the tappets on No. 2 cylinder.

### NUMBER 4 CYLINDER

Crank engine another 1/3 revolution or until the push rods on No. 4 cylinder are loose and the rocker arms on No. 3 can be rocked open or closed slightly by crank movement. Adjust the tappets on No. 4 cylinder.

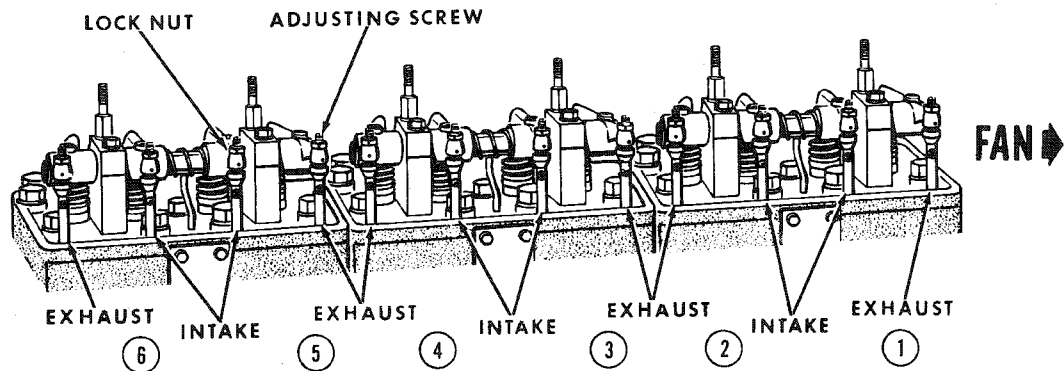


Figure K-31





**NOTE: The J I Case Company reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.**

**SECTION**

**L**

**SERVICING THE**



**CYLINDER HEADS**



**VALVE SYSTEMS**



**ROCKER ARMS**

**ON**

**CASE POWRDYNE SPARK IGNITION ENGINES**

## TABLE OF CONTENTS

CYLINDER HEAD AND COMPONENTS - Disassembly and Installation . . . . .	L-2 thru L-5
ROCKER ARMS AND SHAFTS - Disassembly, Inspection and Assembly . . . . .	L-6
CYLINDER HEAD AND VALVES - Disassembly and Assembly . . . . .	L-8
EXHAUST VALVE ROTATORS . . . . .	L-8
VALVES, GUIDES AND SPRINGS - Inspection . . . . .	L-10
INTAKE AND EXHAUST VALVES - Refacing . . . . .	L-12
INTAKE AND EXHAUST VALVE SEATS - Grinding . . . . .	L-13
LOCATING TOP DEAD CENTER AND TAPPET ADJUSTMENT . . . . .	L-14

## CYLINDER HEAD AND COMPONENTS

(Refer to Figure L-1)

### Removal

Steam clean the engine completely before doing any disassembly or service work.

Drain cooling system. Disconnect the fuel line, throttle and choke control at the carburetor. Remove the spark plug wires from each spark plug. Remove the intake, exhaust and water manifolds. Remove the rocker arm covers.

Remove the rocker arm assemblies and

tag them for proper installation. (Refer to Page L-6).

Remove the push rods and tag or store them in a holder or rack so they can be installed in their same locations.

Remove the cylinder head bolts or nuts and lift the heads off the engine. Remove the head gaskets and discard them.

### Inspection and Installation

Remove all carbon and clean all parts before installation.

#### STANDARD HEAD GASKETS

If you are installing the standard gasket, install the new gasket with new rubber seals. The gasket must be installed with either the copper side up or the side with the case part number up. Continued on Page L-5.

#### FIRE RING HEAD GASKETS

If you are installing the fire ring head gasket, inset B, cylinder sleeve protrusion

must be checked to determine which fire ring to install. Only the standard fire ring is included in the valve grind gasket kit, however a thicker fire ring (.004") is available if the protrusion checks indicate a need for it. The thicker fire ring can be identified by a blue marking stripe.

Refer to Pages L-4 and L-5 for the procedure to follow when installing the fire ring cylinder head gasket.



This as a preview PDF file from [best-manuals.com](https://best-manuals.com)



Download full PDF manual at [best-manuals.com](https://best-manuals.com)